


F2E Cabinet top ventilator

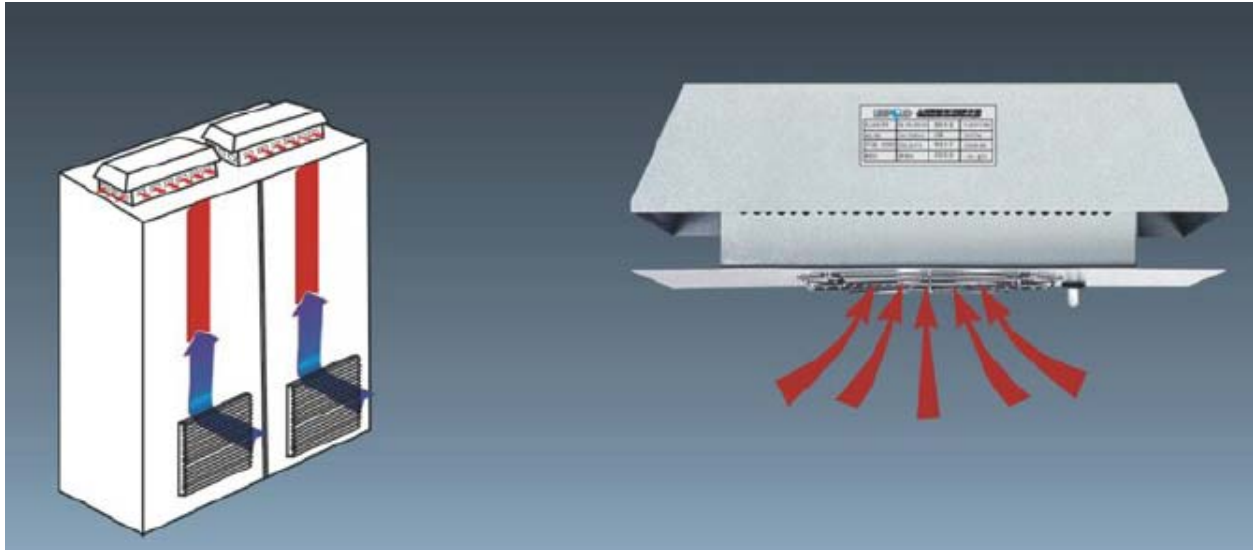

Our company introduced the foreign advanced technology and developed, manufactured the new cabinet top fan. We have patent of the product.

Quantity of heat

Humidity



Interior

The precondition to use the top fan is that the ambient temperature should be lower than the temperature required in the cabinet.



Function

The high-power centrifugal top fan can vent the high heat load by the greatest degree. The centrifugal fan not only can avoid the vortex vented by the general shield magnetic fan, but also can reduce the noise caused by the friction of air. The FK series of ventilative cascades are used in the air intake in order to prevent from entering the humidity and dust.


Design

The centrifugal top fan is larruping. It is handsome and it has the good function and reasonable structure. It also doesn't take up the interior room. It can well satisfy requirement of the present market with it's unique design.


The ventilative cascade in the air intake can prevent from entering the humidity and dust.

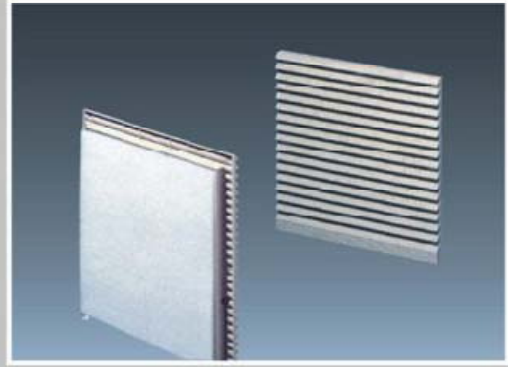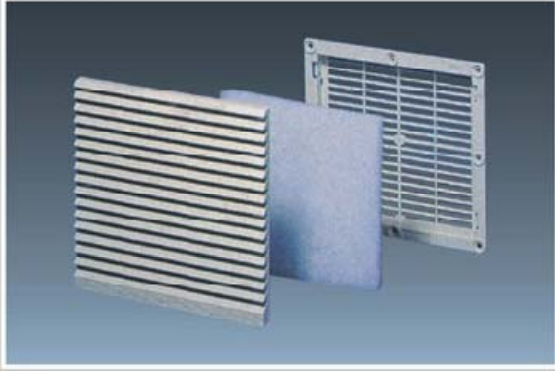

Type	A	B	C	D	E	F
F2E190-230-DS	315	295	120	375	325	375
F2E225-230-DS	315	295	120	375	325	375

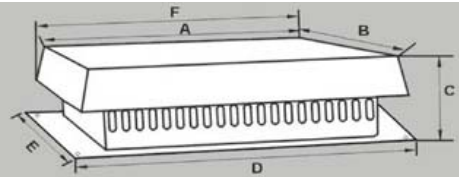

Type	H	I	J	L	ØK	Ø1	Ø2
F2E190-230-DS	359	309	102.5	100	210	8	20
F2E225-230-DS	359	309	102.5	100	210	8	20



Exhauster on the top Type	F2E190-230-DS	F2E225-230-DS
Voltage Frequency	230V 50/60Hz	230V 50/60Hz
Air flow, Ventilation freely	570/620m ³ /h	1200/1340m ³ /h
Flux of air equip filter exported Include filtering pad of standard	1xFK6626.300 456/496m ³ /h	1xFK6626.300 960/1072m ³ /h
Axle flow blower	Capacitance electromotion	Capacitance electromotion
Rated current	0.26A/0.34A	0.60A/0.88A
Power	58/75W	135/200W
Noise level	62/64 dBA	69/71 dBA
Temperature range	-10°C~55°C	-10°C~60°C
The quantity and size of the wind inlet filter can be decided according to the concrete statement		

Power specific property curve

