



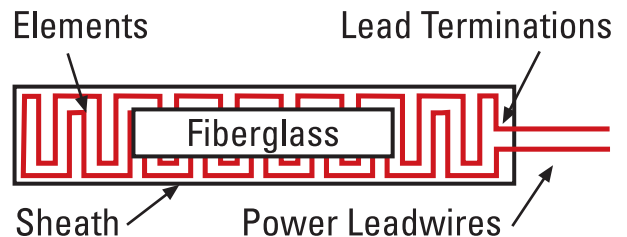

CONRAD

CONRAD FLEXIBLE HEATING TAPES

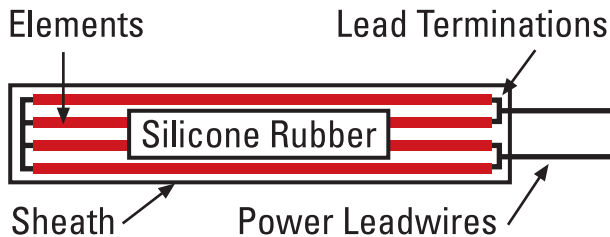

SILICONE RUBBER:

Two layers of silicone rubber impregnated fiberglass are vulcanized together and enclose the multiple strand wire resulting in a rugged yet flexible sheath with excellent moisture, chemical & wear resistance

FIBERGLASS:

The multiple strand, fine gauge resistance wire is enclosed in four layers of braided fiberglass high temperature yarn. It is then knitted into a flat tape insuring a high degree of flexibility while maintaining the unique wire arrangement.

SPECIFICATIONS

Material	Silicone Rubber	Fiberglass
Temperature Rating	500°F (260°C)	750°F (400°C)
Widths	1/2", 1", 2"	0.30" up to 4.00"
Lengths	2 ft. up to 50 ft.	1 ft. up to 20 ft.
Thickness	0.06"	0.08"
Voltages	12, 24, 120, 208, 240 or 480	12, 24, 120, 208, 240 or 480
Wattages	Up to 5 Watts per square inch	Up to 10 Watts per square inch
Leadwires	18 AWG silicone insulated, 2 ft.	12 AWG fiberglass insulated, 2 ft.



CONRAD

CONRAD FLEXIBLE HEATING TAPES

STANDARD SILICONE RUBBER TAPES

Length (ft.)	1/2"	1"	2"
2	CS-2 1/2	CS-21	CS-22
4	CS-4 1/2	CS-41	CS-42
6	CS-6 1/2	CS-61	CS-62
8	CS-8 1/2	CS-81	CS-82
10	CS-10 1/2	CS-101	CS-102
12	CS-12 1/2	CS-121	N/A
15	CS-15 1/2	CS-151	N/A
18	CS-18 1/2	CS-181	N/A
20	CS-20 1/2	CS-201	N/A
25	CS-25 1/2	CS-251	N/A
30	CS-30 1/2	CS-301	N/A
40	CS-40 1/2	CS-401	N/A
50	CS-50 1/2	CS-501	N/A

STANDARD FIBERGLASS TAPES

Length (ft.)	1/2"	1"	2"
2	FGS-2 1/2	FGS-21	FGS-22
4	FGS-4 1/2	FGS-41	FGS-42
6	FGS-6 1/2	FGS-61	FGS-62
8	FGS-8 1/2	FGS-81	FGS-82
10	FGS-10 1/2	FGS-101	FGS-102
12	FGS-12 1/2	*FGSX-121	*FGSX-122
15	FGS-15 1/2	*FGSX-151	*FGSX-152
18	FGS-18 1/2	*FGSX-181	*FGSX-182
20	FGS-20 1/2	*FGSX-201	*FGSX-202

1. Except as noted (*), all sizes above available in 120 or 240 volts. For 240 volt service, add an "X" to prefix, e.g. "CSX-41".
2. Non-standard widths, lengths, voltages, and wattage's available on special order. Please consult factory.