




The armchair is fitted with a system that automatically returns the backrest and leg rest to their original positions whenever the chair is vacated. This ensures that the hall or room is kept looking neat and tidy and, if the chairs are arranged in rows, there is always plenty of room to move freely between them. The chair's electrical installation complies with the relevant standards currently in force.

The feet are height-adjustable to compensate for any unevenness in the floor and keep the chair in a perfectly stable position at all times.

vo sprotivno se snosat posledici vo smislana clenovite 163 i 164 od krivicniot zakon R.M. (povreda na avtorsko pravo) This armchair can also be anchored to the floor.

Optionally, a 250 x 600-mm side table finished in select wood with a glass-holder can be fitted between two chairs.

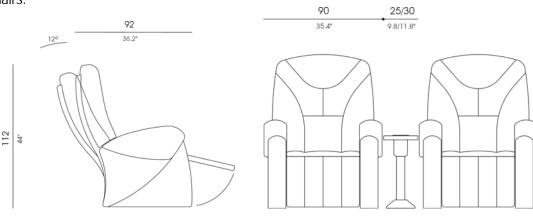

**TECNICHAL CHARACTERISTICS** 

STRUCTURE:

Ovoj crtez e sopstvenost na Electrolux-Bitola. Bez negovo pismeno odobruvanje istiot nesmee da se prepisuva ,umnozuva niti kopira bez soglasnost od Elrctroluks

5


5

5

Steel plate and tube, welded with continuous arc. POLYURETHANE FOAM: Seat density: 65 Kg. m<sup>3</sup> Back density: 57 Kg. m<sup>3</sup> PAINT: Electrostatic powder expoy Coating thickness: 70-80 micra Grid adherence: 100%

Adresa: ul.Braka Mingovi 18, 7000 Bitola; tel: 047/203-330 ,203 900ul.A.Guslarot.1a 02/329 8 130 Skopje

www.electrolux.com.mk www.elektroluks.com.mk e-mail: elek-palenzo@mt.net.mk

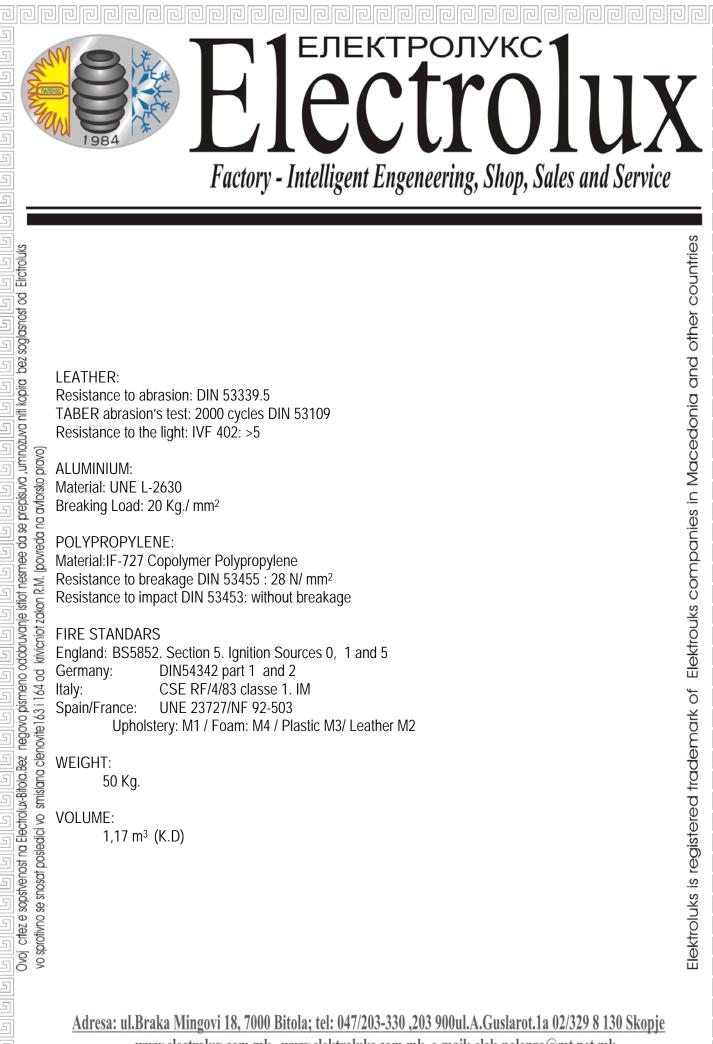

www.electrolux.com.mk www.elektroluks.com.mk e-mail: elek-palenzo@mt.net.mk