




# LONGLIFE *vario*

## System polish with variable sheen

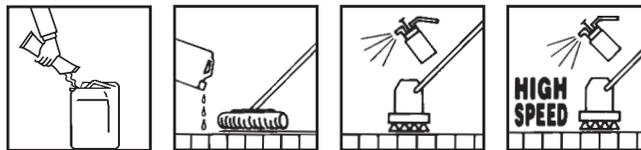


### Composition:

LONGLIFE vario contains: less than 5% of an-ionic and non-ionic tensides. Contains preservatives. Other ingredients: polymers, waxes, softening agents and scents. pH value approx. 9.

### Performance

LONGLIFE vario is an emulsion polish that can be set at one of three levels of shine, from matt to high gloss:



This is mainly an advantage if a number of different floor coverings have to be cleaned and polished in one building, or if different visual requirements apply in different areas. LONGLIFE vario is a high-performance polymer emulsion which, if used correctly, forms a semi-matt protective film that is highly resistant to dirt. If required, however,

a high-speed polishing process can bring the polish film up quickly and easily to a high gloss. The combination of a special acrylate and urethane polymers and high-quality waxes guarantee a hard-wearing finish. If a matt film of polish is required the natural sheen of the coating can be greatly reduced by adding vario MATTPASTE.

### Area of application:

suitable for use on all elastic floorings, particularly linoleum and PVC. Not suitable for unsealed wooden floors and polished stone floors.

### Application

#### Initial treatment:

Shake the can well before use. Apply thin and even coats of LONGLIFE vario 2-3 times on clean, dry, and thoroughly cleansed floors. Leave it to dry for about 30 minutes between coats.

#### 2. High gloss polish film

Create the polish film as described above and bring it up to a high polish with a high-speed machine (>1100 rpm) and a beige pad.

#### 3. Matt polish film

Dissolve the contents of **one** bag of vario MATTPASTE **completely** in 5 litres of LONGLIFE vario and mix it in by shaking the can vigorously. Apply the mixture 2 or 3 times, thinly and evenly, to the clean, dry, and thoroughly cleansed floor with a suitable application cover such as the ultan SPEED. Leave it to dry for about 30 minutes between coats. The shelf life of the LONGLIFE vario / vario MATTPASTE mixture is about one year. Always shake the can before using.

#### Maintenance cleaning

Remove dirt with the damp-wiping or wet-wiping process and SR 13, FR 66, VIONET (approx. 1%) or wipe-on polishes such as TAWIP or WIPGO (approx. 0.5-1%). For automatic cleaning machines we recommend INNOMAT. Remove stubborn traffic stains with the spray cleaning process and LONGLIFE vario or a LONGLIFE vario / vario MATTPASTE-mixture (< 400 rpm, white pad) thinned 1:3 with water.

#### Ecology:

This product is subject to regulations governing the environmental compatibility of washing and cleaning agents and the associated regulations on the biological degradability of the raw materials used.

Comprehensive information on the environmental characteristics of this product is available on request.

Dispose of the empty packaging as recyclable waste.

This product is intended for commercial use.

Vulnerable to frost

Art.-Nr.: 02618	5 l	4 x 5 l per carton
Art.-Nr.: 02751	5 l	

