

LED POINT SOURCE



LED UV-Pen

The UV-Pen is an LED-technology based reliable point source with an output spectrum of 365 nm +/- 10 nm.

Advantages of LED-technology

The use of LED devices offers the following advantages: LED's do not emit IR radiation. The reduced heating of the substrate allows processing of heat sensitive materials. The nearly monochromatic spectrum of the UV-Pen matches the absorption of photoinitiators in UV curable adhesives and allows a fast and secure cure. LED's can be switched on and off without delay caused by heating up. The UV-Pen is instantly ready for operation after switching on.

Applications

The UV-Pen is suitable for a large range of applications:

- Bonding and fixing of components in the electronic, optical and medical industry
- Fluorescent excitation for material testing and image processing
- High-intensity UV irradiation for chemical, biological and pharmaceutical purposes

Highlights


- **monochromatic spectrum around 365 nm**
- **no start up phase**
- **no standby-mode needed**
- **less heat impact**

Benefits

- **optimum adhesive curing performance**
- **suitable for heat sensitive materials**


Flexible use

Output characteristics UV-Pen

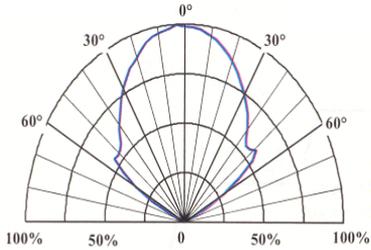

Due to its compact size and low weight the UV-Pen can be used in difficult accessible areas. The UV-Pen is powered directly from the main supply (adaptable for the world wide use). The device is operated via a control unit. The unit is switched on manually by a press switch on the Pen, by an external switch (footswitch) or by a dry PLC contact.

Control unit of the LED-Pen

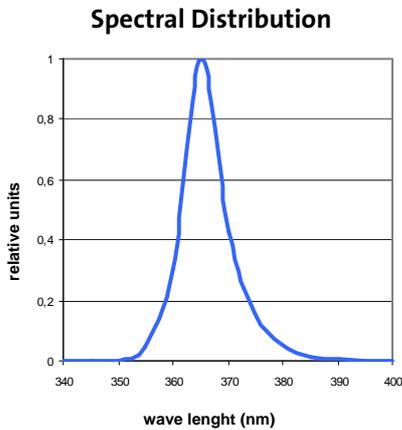

High process security

The UV-Pen has a power control integrated within the system. One optional terminal can be used for temperature monitoring.

Technical data

wavelength	365 nm +/- 10 nm
UVA-intensity ^{*)}	800 mW/cm ²
UVA-intensity ^{**)}	100 mW/cm ²
electrical power input	ca. 5 W
protection class	laser protection class 3B
mains supply	from external net 100-240V AC or 24V DC
dimensions (Ø x length)	26 mm x 125 mm
weight	130 g
continuous operation without additional cooling	max. 10 minutes

UVA-intensity measured with a Höhle UV-Meter and light guide sensor

^{*)} direct at the irradiation exit

^{**)} in 5 mm distance to the irradiation exit



Dr. Höhle AG • UV Technology • Lochhamer Schlag 1 • D- 82166 Gräfelfing/München
Phone: +49 (0)89/8 56 08-0 • Fax: +49 (0)89/8 56 08-148 • E-Mail: uv@hoenle.de
Internet: www.hoenle.de

Operating parameters depend on production characteristics and may differ from the foregoing information. We reserve the right to modify technical data.



Certified
ISO 9001