


Robust Radiator™ Modules (1700°C)

Applications: Zone furnaces, wafer productions, crystal growth, material testing, crucible melting and more.

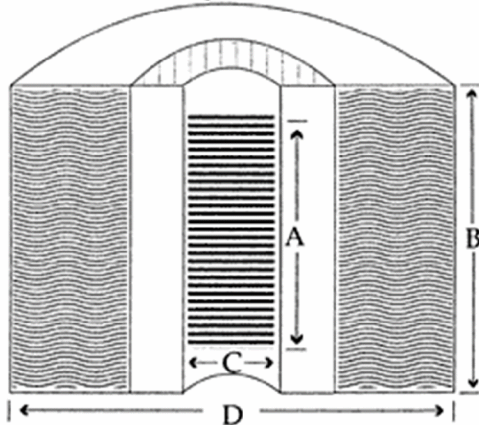

Schematic shows 1/2 cylinder (available only in full cylinder)

Standard Robust Radiator Sizes					
Model #	Max Power (Watts)	Heated Length (A)	Overall Length (B)	ID (C)	OD (D)
RHUL-MP1125-4	825	2 in	4 in	1 in	5 in
RHUL-MP2125-4	1425	2 in	4 in	2 in	6 in
RHUL-MP4125-4	2925	2 in	4 in	4 in	8 in
RHUL-MP3125-5	3075	3 in	5 in	3 in	7 in

Robust Radiator™ modules are coils with ceramic sleeves as shown in the pictures below.



Other Robust Radiator Examples (all custom made per request)					
Model #	Max Power (Watts)	Heated Length (A)	Overall Length (B)	ID (C)	OD (D)



SLH1.5	350	0.25 in	3 in	1.5 in	3.5 in
RHUL-MP1625-6	2175	4 in	6 in	1.5 in	5.5 in
RHUL-MP5125-5	2775	3 in	5 in	5 in	9 in
RHUL-MP2125-6	2850	4 in	6 in	2 in	6 in
RHUL-MP4125-6	2925	4 in	6 in	4 in	8 in
RHUL-MP3125-8	3300	6 in	8 in	3 in	7 in
RHUL-MP7125-5	3750	3 in	5 in	7 in	11 in

Custom sizes and higher watt density available




Robust Radiator
Part # RHUL-MP3625-14
 (with stainless steel casing option)



Robust Radiator
Part # RHUL-MP2125-4
 (with stainless steel casing option)



High Temperature Sleeve Heater
Part # SLH1.5

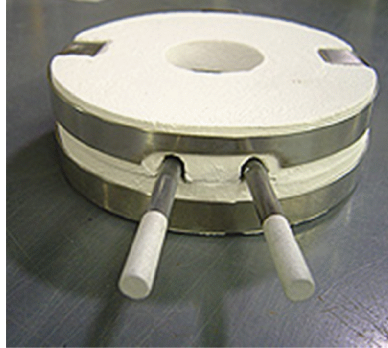

Robust Radiator
Part # RHUL-MP1125-3