



ЕЛЕКТРОЛУКС Electrolux

Industrija za elektricni greaci, gumeni proizvodi i servis

Ovoj crtezi e sastavljeno na Electrolux-Bitola. Bez negovo pismeno odobruvanje istot nesmee da se prepišiva, umnožava niti kopira bez soglasnosti od Electrolux
vo spratljivo se smislači postedići vo smislači členovite l63 i l64 od kriminalni zakon R.M. [povreda na avtorsko pravo]

5038 SERIES FUNCTIONAL FEATURES



A special chair with classical lines. The seat comprises a metal structure and springs, a polyurethane foam block, upholstery, shell and hinge pins. The metal structure consists of two resistance-welded steel profiles forming a frame that holds a mesh of springs upon which the anatomically shaped cold-moulded polyurethane block rests.

The polypropylene shell is upholstered. It houses the assembly comprising the metal structure, the polyurethane block and the seat upholstery. It also holds the hinge pin and spring system that ensures that the seat tips up automatically when it is vacated. This specially designed mechanism is extremely reliable and requires no maintenance.

Elektroluks is registered trademark of Elektroluks companies in Macedonia and other countries



Adresa: ul.Braka Mingovi 18, 7000 Bitola; tel: 047/203-330 ,203 900ul.A.Guslarot.1a 02/329 8 130 Skopje
www.electrolux.com.mk www.elektroluks.com.mk e-mail: elek-palenzo@mt.net.mk





ЕЛЕКТРОЛУКС Electrolux

Industrija za električni greaci, gumeni proizvodi i servis

The backrest is made up of a cold-moulded polyurethane foam block on a rigid structure, forming a comfortable, anatomically shaped assembly that is resistant to fatigue.

The structure is made of curved steel tube with flat springs supporting the foam block, which is fully upholstered. The backrest is entirely surrounded by a lacquered wooden frame to give the seat the desired classical appearance. Between the upholstery and the foam of both the seat and the back, there is a 5-mm thick TS System fire curtain that keeps fire from reaching the foam, thus preventing the emission of toxic gases and flames.

The seat tips up automatically due to an extremely quiet double spring system inside the seat shell (tested to 500,000 cycles) that requires no lubrication of any kind.

The chair is mounted on two metal feet incorporating a ball-and-socket joint system -including a locking mechanism- into which the seat pin fits. This enables the seat to be easily replaced without dismounting the whole structure.

The cast aluminium end-of-row side panels are of classical design. The in-between panels are made of shielded seam arc-welded steel profiles coated with 70-80 microns of epoxy paint. The side panel supports the headrest and acts as the structure for the chair. The armrests have an upholstered, foam-covered inner body or wooden support.






95

Ovoj crtež e sastavnenost na Electrolux-bitola. Bez negovo pismeno odobruvanje istot nesmee da se prepišava, umnožava niti kopira bez soglasnosti od Electrolux-a.

55

21.5"

37"

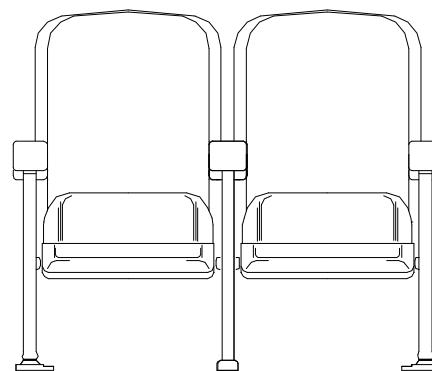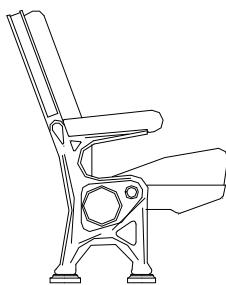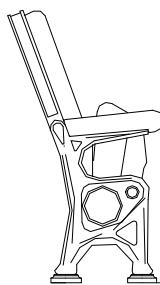

Elektroluks is registered trademark of Elektroluks companies in Macedonia and other countries



Adresa: ul.Braka Mingovi 18, 7000 Bitola; tel: 047/203-330 ,203 900ul.A.Guslarot.1a 02/329 8 130 Skopje

www.electrolux.com.mk www.elektroluks.com.mk e-mail: elek-palenzo@mt.net.mk





ЕЛЕКТРОЛУКС
Electrolux

Industrija za električni greaci, gumeni proizvodi i servis

Ovoj crtež e sastavljeno na Electrolux-Bitola. Bez negovo pismeno odobruvanje istot nesmee da se prepišava, umnožava niti kopira bez soglasnosti od Electrolux
vo spratljivo se smisljano členovite l63 i l64 od kriminalist zakon R.M. (povreda na avtorsko pravo)

TECNICAL CHARACTERISTICS

STRUCTURE:

- Steel plate and tube, welded with continuous arc.

POLYURETHANE FOAM:

- Seat density : 60-65 kg/m³
- Back density : 50-55 kg/m³

PAINT:

- Electrostatic powder Polyester
- Coating thickness: 70-80 micras
- Grid adherence: UNE-EN ISO 2409: 100%

UPHOLSTERY:

- Fire Standars
- Spain: UNE-EN 1021 Part 1 & 2
- France: NF/P 92507
- Italy: UNI 9175 Clase 1.II
- USA: CAL T.B. 133 (in approved fabric)

FINISHED PRODUCT :

- UNE-EN 12727 Level 4 (intensive use).

ALUMINIUM:

- Material: UNE L-2630
- Density : 2,7 gr./cm³
- Breaking Load: 20 kg/ mm²

WOOD:

In beech wood curved by high-pressure steam, finished in two polyurethane varnished components.

WEIGHT: 27 Kg.

VOLUME: 0,18 m³ (K.D)

Electrolux is registered trademark of Elektroks companies in Macedonia and other countries



Adresa: ul.Braka Mingovi 18, 7000 Bitola; tel: 047/203-330 ,203 900ul.A.Guslarot.1a 02/329 8 130 Skopje

www.electrolux.com.mk www.elektroks.com.mk e-mail: elek-palenzo@mt.net.mk

