


## The Omega Emitter

Infrared emitters can be individually formed to match the requirements of the finishing process. So heat is targeted to where it is needed, e.g.


- Joining, welding or riveting of plastic parts
- Forming or bending of tubes
- Drawing of glass or plastic fibers

### Technical Data

- Short-wave
- Quartz glass, 8 mm diameter
- mounting equipment on request
- **for horizontal operation**

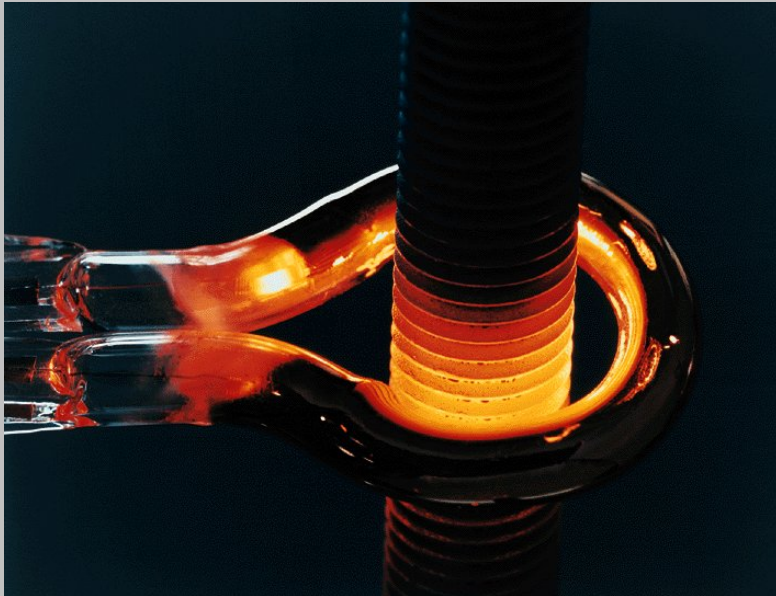

A gold reflector directs IR radiation to the product. Choose the reflector type according to the application out of three standard types, others on request !

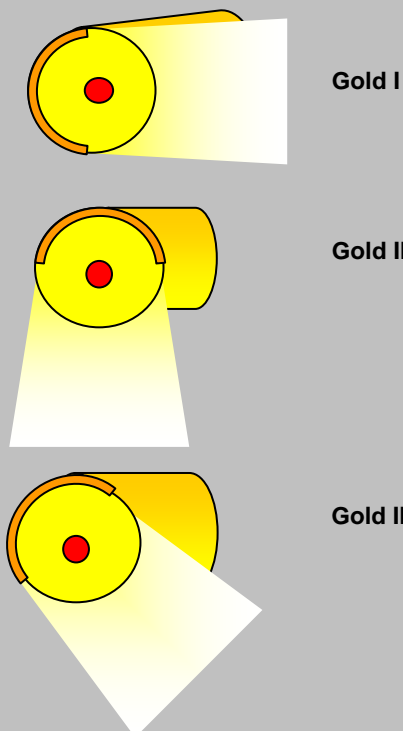

Data sheet – May 2003 – We reserve the right to change data !

outside diameter mm	Power W	Voltage V	Reflector	Ident-no.
39	250	115	without	80008210
			Gold I	80008212
			Gold II	80008213
			Gold III	80008214
80	1500	230	without	80008221
			Gold I	80008222
			Gold II	80008223
102	1850	230	without	80008230
			Gold I	80008231
			Gold II	80008232
154	2000	230	without	80008235
			Gold I	80008236
			Gold II	80008238
180	2200	230	without	80008239
			Gold I	80008240
			Gold II	80008242
			Gold III	80008243

**Heraeus Noblelight GmbH**  
 Business Development Team  
 Tel. +49 6181 35-8545  
 Fax +49 6181 35-16 8410  
[www.heraeus-noblelight.com](http://www.heraeus-noblelight.com)