



ЕЛЕКТРОЛУКС Electrolux

Factory - Intelligent Engineering, Shop, Sales and Service

8036 SERIES FUNCTIONAL FEATURES



A modular seat made up of fully replaceable parts that has very generous dimensions. The nominal minimum distance between axes is 58 cm. This distance has not been achieved by adding wider armrests or supplementary items between the seats, but by increasing the dimensions of the seat and backrest, so that the actual minimum space for the user is 56 cm, a measurement that provides a high degree of comfort.

Adresa: ul.Braka Mingovi 18, 7000 Bitola; tel: 047/203-330 ,203 900ul.A.Guslarot.1a 02/329 8 130 Skopje

www.electrolux.com.mk www.elektroluks.com.mk e-mail: elek-palenzo@mt.net.mk

Ovoј crtez e сопственост на Electrolux-Bitola.Bez negovo писмено одобрување истиот не смее да се препишува ,умножува или копира без согласност од Eictrroluks во спротивно се сносат последици во смислa на членовите 163 i 164 од Кривичниот закон Р.М. (поведа на авторско право)

Electroluks is registered trademark of Elektroluks companies in Macedonia and other countries



ЕЛЕКТРОЛУКС Electrolux

Factory - Intelligent Engineering, Shop, Sales and Service

The seat and backrest consist of two moulded polyurethane blocks which incorporate an internal metal structure and upholstery, without any seams or stitching, that is fully integrated with the foam by means of the INTEGRAL FORM system. Between the upholstery and the foam of both the seat and the back, there is a 5 mm-thick TS System fire curtain that prevents fire from reaching the foam, thus slowing down the emission of toxic gases and flames. The backrest cushion has a specially designed anatomical shape with lumbar support and headrest and vertical and horizontal fluting in the headrest. The seat cushion is also anatomically shaped, but is completely plain, without any channels or fluting, to keep out the dust. The seat and backrest are finished in fully washable IF727 material that protects the upholstery at the backrest.



The seat tips up automatically thanks to an extremely quiet double spring system inside the seat shell (tested to 500,000 cycles) that requires no lubrication of any kind.

The chair is mounted on two metal feet incorporating a ball-and-socket joint system -including a locking mechanism- into which the seat pin fits. This enables the seat to be easily replaced without dismantling the whole structure. The feet have a tubular steel structure finished in black or grey epoxy paint and are fixed to the floor by means of expansion plugs.

Adresa: ul.Braka Mingovi 18, 7000 Bitola; tel: 047/203-330 ,203 900ul.A.Guslarot.1a 02/329 8 130 Skopje

www.electrolux.com.mk www.elektroluks.com.mk e-mail: elek-palenzo@mt.net.mk



ЕЛЕКТРОЛУКС Electrolux

Factory - Intelligent Engineering, Shop, Sales and Service

The seat can be adapted to any particular slope by regulating the base. Rows are formed by joining the backs of the seats together to provide a totally rigid, stable structure that reinforces the floor anchorage. The armrests are made of polyurethane foam on an inner metal structure. Both the seat and backrest incorporate the TX acoustic system, a set of holes at the rear which give an excellent acoustic response. Optionally, the upper part of the rear panel shell of the backrest may also be upholstered. The seat can be fully upholstered without losing any of its acoustic properties.



The backrest can also be made with HR. This type of backrest features a headrest that is integrated into the backrest. In other words, it is not an add-on, but is actually an integral part of the backrest. This headrest system has a clear ergonomic advantage, as it is a natural extension of the backrest, not a separate item that is added onto it.

Optionally, the seat can incorporate the PLX anti-panic writing tablet. When leaving the seat, this tablet folds away automatically into the side of the seat, thus preventing the gangway from being blocked in the event of an emergency evacuation.

The writing tablet folds away quickly and neatly due to a new spring system that allows a synchronized movement of folding of two axis, therefore the system becomes highly durable and reliable, and requires no maintenance.

In conjunction with the F 45 table, this is an ideal solution for long working sessions and conferences.

Ovoј crtez e сопственост на Electrolux-Bitola.Bez negovo писмено одобрување истиот не смеј да се препишува, умножува нити копира без согласност од Electrolux во спротивно се сносиат последици во смисла на членовите 163 i 164 од Кривичниот закон Р.М. (повреда на авторско право)

Electrolux is registered trademark of Elektroluks companies in Macedonia and other countries

Adresa: ul.Braka Mingovi 18, 7000 Bitola; tel: 047/203-330 ,203 900ul.A.Guslarot.1a 02/329 8 130 Skopje

www.electrolux.com.mk www.elektroluks.com.mk e-mail: elek-palenzo@mt.net.mk



ЕЛЕКТРОЛУКС Electrolux

Factory - Intelligent Engineering, Shop, Sales and Service


TECHNICAL CHARACTERISTICS

57

22.4"

95

37.4"



57


22.4"

65

25.6"

95

37.4"



STRUCTURE:

- Steel plate and tube, welded with continuous arc.

POLYURETHANE FOAM:

- Seat density: 65 Kg. m³
- Back density: 57 Kg. m³

PAINT:

- Electrostatic powder epoxy
- Coating thickness: 70-80 micra
- Grid adherence: 100%

Ovoј crtez e сопственост на Electrolux-Bitola.Bez negovo писмено одобрување истиот не смее да се препишува, умножува нити копира без согласност од Eictroluks во спротивно се сносат последици во смислана членовите 163 i 164 од кривичниот закон R.M. (повеќа на авторско право)

Electroluks is registered trademark of Elektroluks companies in Macedonia and other countries

Adresa: ul.Braka Mingovi 18, 7000 Bitola; tel: 047/203-330 ,203 900ul.A.Guslarot.1a 02/329 8 130 Skopje

www.electrolux.com.mk www.elektroluks.com.mk e-mail: elek-palenzo@mt.net.mk



ЕЛЕКТРОЛУКС Electrolux




Factory - Intelligent Engineering, Shop, Sales and Service

UPHOLSTERY:

- Pilling: Index 5 BS 5811

POLYPROPYLENE:

- Material:
Copolymer Polypropylene IF-727
- Resistance to breakage DIN 53455:
28 N/mm²
- Resistance to impact DIN 53453:
without breakage

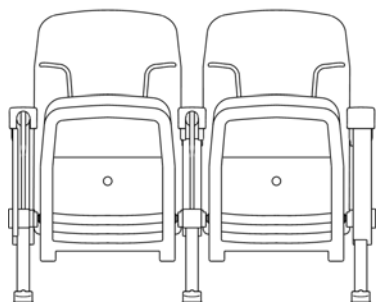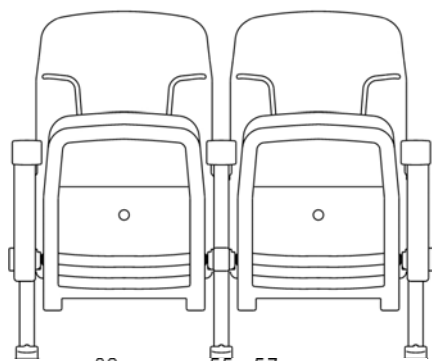

95
37.4"

99
39"

57

22.4"




58

22.8"

84

33"



85

33.5"

Ovaj crtez e sopstvenost na Electrolux-Bitola.Bez negovo pismeno odobruvanje istiot nesmee da se prepisuva ,ummozuva niti kopira bez soglasnost od Eictroluks vo sproitivno se snosat posledici vo smisiana clenovite 163 i 164 od knivicitot zakon R.M. (povreda na avtorsko pravo)

Electrolux is registered trademark of Elektroluks companies in Macedonia and other countries

Adresa: ul.Braka Mingovi 18, 7000 Bitola; tel: 047/203-330 ,203 900ul.A.Guslarot.1a 02/329 8 130 Skopje

www.electrolux.com.mk www.elektroluks.com.mk e-mail: elek-palenzo@mt.net.mk






ЕЛЕКТРОЛУКС Electrolux

Factory - Intelligent Engineering, Shop, Sales and Service

FIRE STANDARDS

33 57 - 59
13" 22.4" - 23"

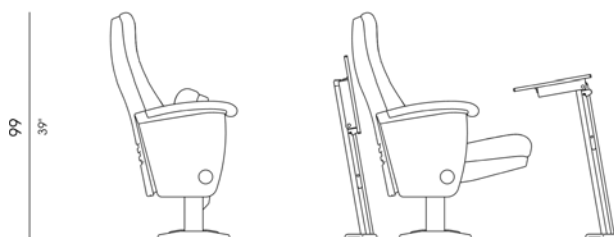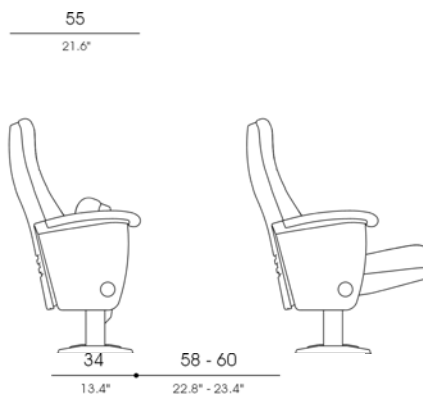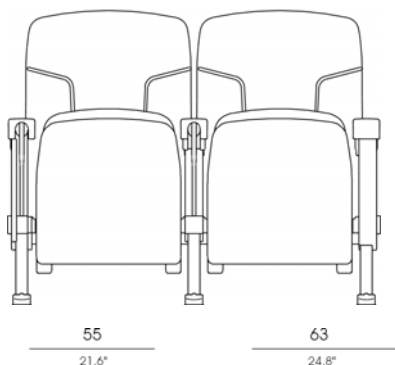

England:
BS5852. Section 5. Ignition Sources 0, 1 and 5

Germany:
DIN54342 part 1 and 2

Italy:
CSE RF/4/83 class 1. IM

Spain/France:
UNE 23727/NF 92-503

Upholstery: M1/Foam: M4/Plastic: M3

USA:
CAL T.B. 133 (in approved fabric)

WEIGHT:
30 Kg.

VOLUME:
0,20 m3 (K.D.)

Adresa: ul.Braka Mingovi 18, 7000 Bitola; tel: 047/203-330 ,203 900ul.A.Guslarot.1a 02/329 8 130 Skopje

www.electrolux.com.mk www.elektroluks.com.mk e-mail: elek-palenzo@mt.net.mk

Ovoј crtez e сопственост на Electrolux-Bitola.Bez negovo писмено одобрување истиот не смее да се препишува ,умножува или копира без согласност од Eictroluks во спротивно се сносиат последици во смислата членовите 163 i 164 од кривичниот закон R.M. (повреда на авторско право)

Electroluks is registered trademark of Elektroluks companies in Macedonia and other countries