



LSP50G

Pneumatic pin clamp

L	S	P	5	0	G	U	3	0	0	0	0	0
1	2	3			4	5	6	7	8	9		

1 Series	2 Version	3 Size
-----------------	------------------	---------------

LS = Pneumatic pin clamp

P = Pneumatic standard

50 = Ø 50 mm

4 Model	5 Sensing style	6 Pin diameter
----------------	------------------------	-----------------------

G = refer to enclosed technical drawings

U = Electronic 24 Vdc sensor with M12 swivel connector

2 = Ø 20 mm

3 = Ø 25 mm

4 = Ø 30 mm

5 = Ø 35 mm

6 = Ø 40 mm

7 Locating pin	8 Working height	9 Progressive numbering
-----------------------	-------------------------	--------------------------------

0 = Locating pin non included

1 = Locating pin included


0 = Standard

Others upon request

Progressive numbers for special products are assigned by the Sales Dept.



Pneumatic pin clamp

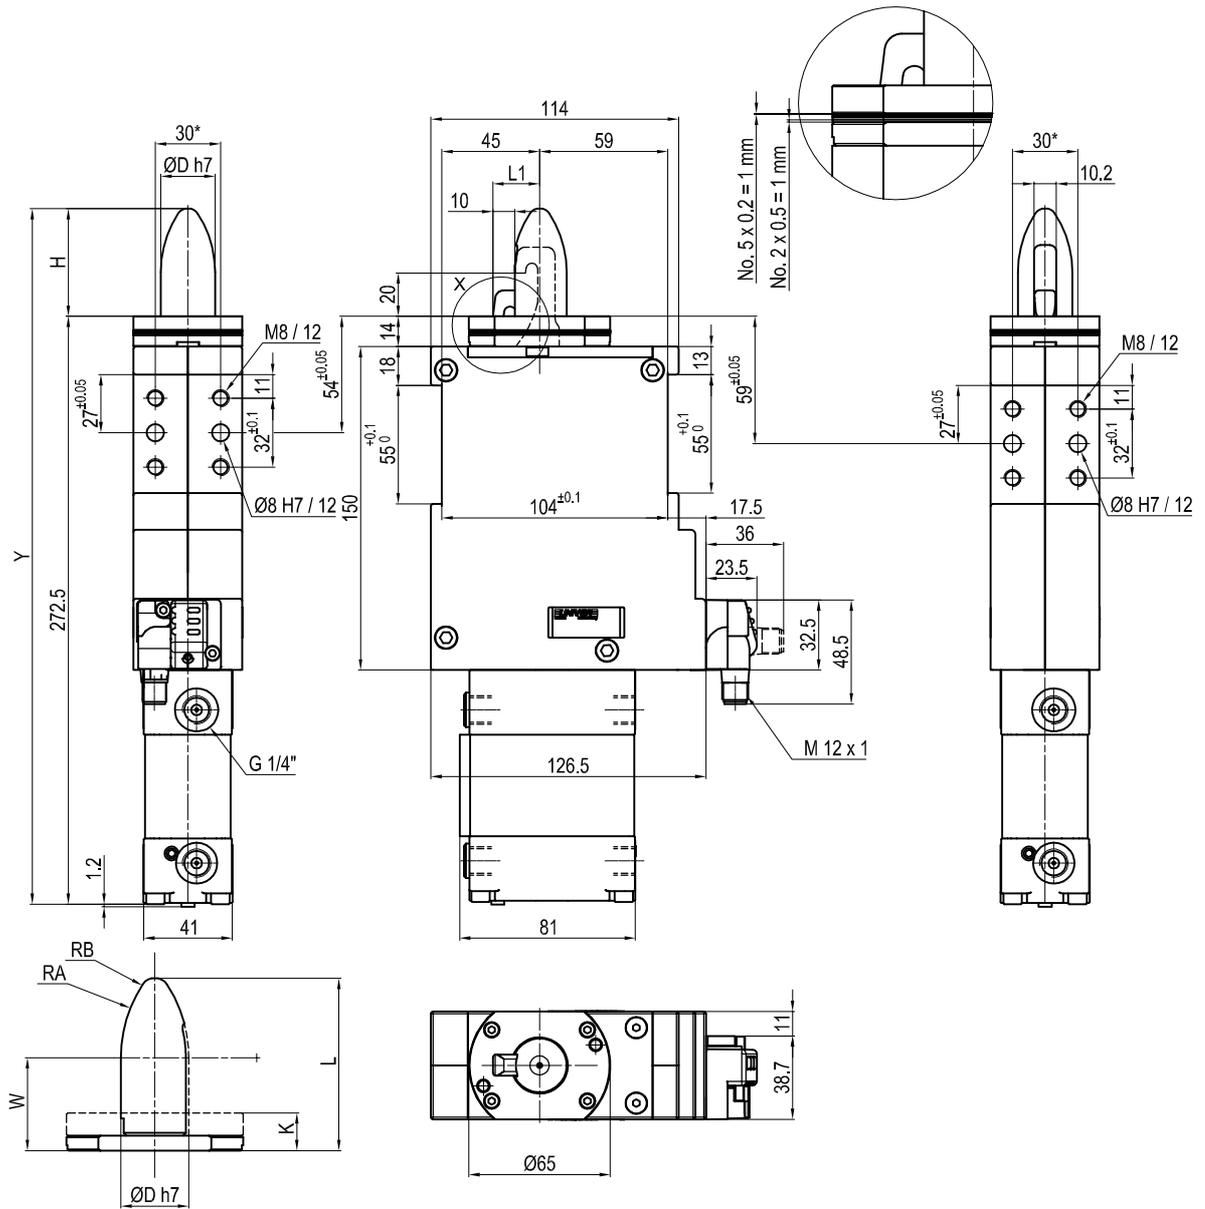

$\varnothing D$	H	K	L	L1	RA	RB	W	Y
20	45	14	59	19	65	5	34.5	317.5
25	50	14	64	21.5	50	5	34.5	322.5
30	50	14	64	24	50	5	34.5	322.5
35	50	14	64	26.5	48	2	29	322.5
40	50	14	64	29	48	2	29	322.5

Bore \varnothing	Clamping force	Weight
50 mm	350 Kg	3.2 Kg

Min./Max. operating pressure: **0,4 / 0,8 MPa**

Operating temperature: **5° + 45° C**

Electronic 24 Vdc sensor with M12 swivel connector that can be orientated at 0° or 90°

Protection class: **IP 54**

Pneumatic ports on both sides

* : TOLERANCE BETWEEN DOWEL HOLES ± 0.02 , TO SCREW HOLES ± 0.1

Subject to technical modification without notice.