

## Products

### The R3 Range Compact and versatile

The R3 range of rotowash machines are a combination of single pass (R3B-K) and dual pass (R3AS-K) scrubber driers, that are capable of producing a high quality clean on all types of hard floors and carpets. The R3B-K has all the attributes of the R3AS-K plus the added advantage of being a single pass scrubber drier which means it has a greatly increased coverage. The cleaning solution is fed onto the floor from the clean water tank via an electric spray pump mounted at the front of the machine. This means it can be used in large open areas by simply walking behind it. The well proven twin cylindrical brush principle means that the machines exert up to ten times the pressure on the floor surface than conventional machines. In confined spaces they are light to use and easy to manoeuvre around obstacles like furniture and fittings. This overall compactness means that the machines are ideally suited to environments such as hospitals, nursing homes, kitchens, school classrooms, hotels etc.



Technical Specification	R3AS-K	R3B-K
Brush width	30cm	30cm
Brush type	cylindrical (2)	cylindrical (2)
Brush speed	650 rpm	650 rpm
Brush motor	700 watt	700 watt
Pump motor		25 watt
Clean water tank capacity	8.2 ltr	7.0 ltr
Dirty water tank capacity	1.2 ltr	1.2 ltr
Weight	27 Kg	28 Kg
Hard floors coverage	350m <sup>2</sup> /hr max	750m <sup>2</sup> /hr max
Soft floors coverage	150m <sup>2</sup> /hr max	375m <sup>2</sup> /hr max

## The R4 Range

### Versatile and efficient

The R4 range of 40cm (16 inches) twin cylindrical brush machines are capable of producing a high quality clean on all floor surfaces including difficult to clean carpets and hard safety flooring, leaving the floor dry within minutes. The dual pass R4AS-K, is ideally suited for medium sized areas such as kitchens, restaurants, schools, shops and nursing homes.

The R4B-K single pass machine with its' vastly increased speed and greater capacity is ideally suited for hospital wards, corridors, sports centres, catering areas and department stores. The R4ESC is an enhanced version of the R4B that additionally cleans escalators and travelators. The increased brush diameter enables the R4ESC to clean deep into the grooves, with minimal water consumption. Even heavily soiled escalators can be restored, leaving steps dry in minutes and presenting no safety hazard to electrical components.



Technical Specification	R4AS-K	R4B-K	R4ESC
Brush width	40cm	40cm	40cm
Brush type	cylindrical (2)	cylindrical (2)	cylindrical (2)
Brush speed	650 rpm	650 rpm	650 rpm
Brush motor	800 watt	800 watt	800 watt
Pump motor	N/A	25 watt	25 watt
Clean water tank capacity	9.0ltr	7.0ltr	7.0 ltr
Dirty water tank capacity	2.0ltr	2.0ltr	1.75 ltr
Weight	29 Kg	30 Kg	30 Kg
Hard floors coverage	500m <sup>2</sup> /hr max	1000m <sup>2</sup> /hr max	1000m <sup>2</sup> /hr max
Soft floors coverage	250m <sup>2</sup> /hr max	500m <sup>2</sup> /hr max	500m <sup>2</sup> /hr max

## The R5 Range


### Large capacity and high specification

The rotowash R5 range consists of two high productivity machines. The single pass R5B-K, and dual pass R5AS-K scrubber driers are capable of producing a high quality clean on all types of floors, ranging from carpets to hard safety flooring. Both models have a superb 50cm (20 inches) brush width and a large cleaning area capacity, which make the R5 family ideal for applications such as sports halls, shopping malls, factories, large kitchens, long corridors, etc. The R5B-K is particularly suited to the heavy duty contractor markets with its superior productivity and extra weight for heavy scrubbing work. Both models enjoy a heavy drive motor ensuring reliable performance even on the toughest of jobs. The R5 range is compact and designed to reach under fixtures and fittings with a floor clearance of minimum 20cm (8.5 inches), and yet the R5B-K can also achieve over 1200 square meters per hour on large area cleaning.



Technical Specification	R5AS-K	R5B-K
Brush width	50cm	50cm
Brush type	cylindrical (2)	cylindrical (2)
Brush speed	550 rpm	550 rpm
Brush motor	800 watt	800 watt
Pump motor	N/A	25 watt
Clean water tank capacity	10.0 ltr	7.0 ltr
Dirty water tank capacity	3.0 ltr	3.0 ltr
Weight	33 Kg	35 Kg
Hard floors coverage	640m <sup>2</sup> /hr max	1250m <sup>2</sup> /hr max
Soft floors coverage	320m <sup>2</sup> /hr max	600m <sup>2</sup> /hr max

### Fast...effective cleaning

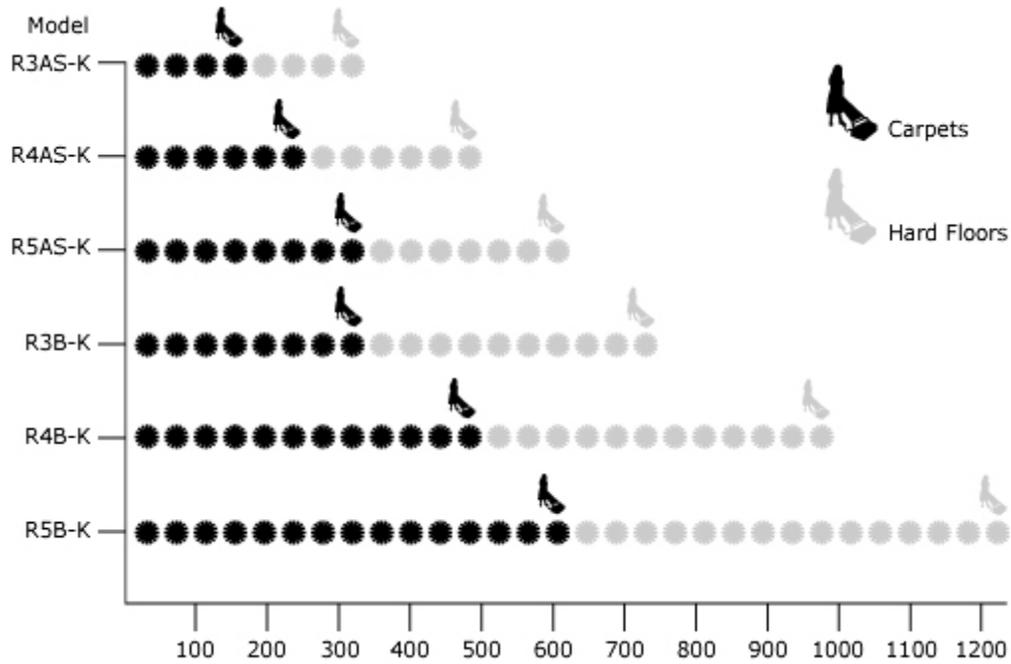

### Square metres per hour cleaning productivity

The above chart indicates the maximum floor cleaning productivity per hour of Rotowash machines. The R4ESC is an enhanced version of the R4B-K that additionally cleans escalators. The R2-K is specifically designed for very small and compact areas and is therefore not included in the cleaning productivity chart.