

**NOVTRAK<sup>®</sup>**  
FLOOR MATTING

Terms & Conditions	1	139 Boulevard™	43
<b>Safety/Anti-Fatigue • “Dry • Superior”</b>		150 Aqua Trap®	44
979 Saddle Trax™	2	161 Barrier Rib™	45
970 Marble Sof-Tyle™ Grande™	3	<b>Entrance • “Best”</b>	
980 Pebble Trax® Grande™	4	105 Chevron	46
974 Ergo Mat™ Grande™	5	131 Dante™ Decalon®	47
<b>Safety/Anti-Fatigue • “Dry • Best”</b>		117 Heritage Rib®	48
479 Cushion Trax®	6	136 Polynib®	49
470 Marble Sof-Tyle™	7	166 Guzzler™	50 – 51
480 Pebble Trax®	8	167 Portrait™	50 – 51
474 Ergo Mat™	9	168 Opus™	50 – 51
<b>Safety/Anti-Fatigue • “Dry • Better”</b>		<b>Entrance • “Better”</b>	
419 Diamond Sof-Tred™ w/Dyna-Shield®	10	130 Sabre™ Decalon®	52
406 Razorback® w/Dyna-Shield®	11	109 Brush Step®	53
413 Blade Runner® w/Dyna-Shield®	11	<b>Entrance • “Outdoor”</b>	
417 Bubble Sof-Tred™ w/Dyna-Shield®	11	265 Wayfarer®	54
415 Pebble Step Sof-Tred™ w/Dyna-Shield®	12	266 Wayfarer® Custom	55
<b>NEW</b> T17 Superfoam®	12	340/350 Soil Guard™ Series	56
<b>Safety/Anti-Fatigue • “Dry • Good”</b>		345 Rubber Brush™	57
410 Airug®	13	<b>Entrance • “Foyer”</b>	
411 Sof-Tred™	13	323/325 Smart Step™ Series	58
<b>Safety/Anti-Fatigue • “Wet/Dry • Superior”</b>		370 Master Trax™	59
850 Niru® Cushion-Ease® GSII™	14	<b>Entrance • “Logo”</b>	
856 Niru® Cushion-Ease® GSII™ Solid	14	180 Tufted Logo Matting	60
650 Niru® Cushion-Ease®	15	190 BrilliantStep™	61
656 Niru® Cushion-Ease® Solid	15	<b>Accessories</b>	
549 Safety Stance®	16	083/084 Beveled Nosing/HD	62
<b>NEW</b> 620/622 Diamond Flex-Lok™ Series	17	085 Velcro®	63
<b>NEW</b> 580 Sorb Stance™	18	090 Mat Hold	63
543 Cushion-Tred™	19	096 Application Roller	63
<b>Safety/Anti-Fatigue • “Wet/Dry • Best”</b>		<b>Food Service</b>	
520/522 Cushion-Lok™ Series	20	543 Cushion-Tred™	64
920/922 Cushion-Lok™ Solid-Top Series	21	550 Cushion-Ease®	65
550 Cushion-Ease®	22	544 Comfort Zone™	66
556 Cushion-Ease® Solid	23	755/785 Niru® Versa/Knob Top Runner®	67
<b>NEW</b> 585 Eco Stance™	25	<b>Specialty</b>	
<b>Safety/Anti-Fatigue • “Wet/Dry”</b>		523 Modular Lok-Tyle™	68
551 M.D. Ramp System™	24	531 Safety Grid™	69
<b>Safety/Anti-Fatigue • “Wet/Dry • Better”</b>		035 Skate-Spike Matting™	70 – 71
420/422 Cushion-Dek™ Series	26	045 Weight Room Matting	70 - 71
447 Comfort-Eze™	27	769 Clear Trax™	70 - 71
562 Sanitop®	28	680 Safety Trax™	72
545 Diamond Top Interlock™	29	950/951 Knee RX Series	73
<b>NEW</b> Solutions™	30 – 31	<b>Dissipative/Anti-Static • “Better”</b>	
<b>Industrial &amp; Commercial Runners</b>		825 Cushion-Stat™ w/Dyna-Shield®	74
730/750 V-Groove Corrugated Runner™	32	826 Diamond Stat™	75
735/737 Round Rib/Diamond Plate Runner	33	<b>Insulative/Non-Conductive • “Best”</b>	
<b>Entrance • “Specialty”</b>		830 Switchboard Matting	76
137 Opera™	34	831 Diamond Switchboard Matting	77
148 Intermission™	35	Product Glossary/Test Information	78
231 Prelude™	36 – 37	Product Index (By Part #)	79
146 Encore™	36 – 37	Chemical Resistance Chart	80
141 Ovation™	36 – 37		
170 OrienTrax™	38		
<b>Entrance • “Superior”</b>			
118 Arrow Trax™	39		
132 Estes™	40		
145 Preference®	41		
138 Uptown™	42		

Velcro® is a registered trademark of Velcro® USA, Inc.

**WARRANTY:** All NOTRAX® floor matting is manufactured of the highest quality material and workmanship. Dependability and service of our products are guaranteed under normal conditions of use, or a full refund or replacement (based on the manufacturer's discretion) will be made. Buyer has the responsibility to determine the suitability of the product and assumes any liability in connection with such use. Seller shall not be liable for damages in excess of purchase price of product. Warranty does not apply to splicing or seaming of mats. Laminate - top products (including UniFusion™ products) with foam backing are not guaranteed against spike heels or stool legs.

Superior Manufacturing Group guarantees the bond on all NoTrax® laminated mats that incorporate the UniFusion™ process for the lifetime of the mat. The bond is guaranteed under normal conditions of use in reasonable dry application environments, or a full refund or replacement mat (based on the manufacturer's discretion) will be issued. Proof of purchase is required for all refunds or replacements. This lifetime warranty protects against de-lamination or bond failure, and does not cover issues unrelated to the bond such as wear or foam tears.

**PRODUCT SPECIFICATIONS:** All products are manufactured to meet or exceed normal industry standards. Reasonable variations in size and/or color may occur. Tolerances will vary by manufacturing process. For specific information on any given product, contact our customer service department.

Full Rolls on carpet mats only have vinyl borders on the sides, ends are not provided with any nosing. If finished, nosed ends are required, the roll is priced at the "Cut Lengths" level which is a 15% up-charge.

All Entrance matting passes the Flammability Test DOC-FF-1-70. The only carpeted entrance mats that should be considered for splicing are the #130 Sabre/Polyplush™ and the #131 Dante™. Matting should never be stored on-end. For proper storage, roll mat with top surface to the outside and lay flat in a protected area. Do not stack any materials or other matting on top of a stored mat. When placing a mat into service, be certain that the floor to be covered and the back of the mat are completely free of dirt and debris. Foreign material on the floor or the mat will cause slippage and possible injury. Manufacturer will not be liable for any injuries resulting from failure to follow recommended housekeeping procedures. Frequent cleaning under mats is also required to maintain warranty.

**TERMS:** 1% 10 Days, Net 30 Days. Discount applies ONLY to invoices paid within 10 days of invoice date. (Shipping charges, handling charges and taxes are excluded.)

**PAYMENT:** Superior Manufacturing Group accepts payments via VISA®, MASTERCARD®, AMERICAN EXPRESS®.



C.O.D. payments no longer accepted.

**PRICING:** All prices are manufacturer's suggested list. Pricing quoted only to existing NOTRAX® Distributors. Prices are subject to change without notice.

**ORDERING:** When ordering, specify product number, size, color, quantity and any special instructions required.

**MINIMUM ORDER CHARGE:** No minimum order required. However, a \$5.00 small-order handling charge will be added to all orders having a net value of \$25.00 or less.

**FREIGHT TERMS:** F.O.B. Factory, -IL, GA or MS (see "Location" shown for each item) - No Freight Allowed. A handling charge will be imposed on all U.P.S.™; FedEx™ Ground & FedEx™ Shipments.

**DAMAGED GOODS AND SHORTAGES:** All delivered material should be inspected and counted BEFORE accepting shipment. Any damages or shortages should be documented on freight bill. If any discrepancies occur, please contact our customer service department for assistance in filing a claim.

**RETURN GOODS AUTHORIZATION:** Factory approval is required prior to product returns. Standard stock items in new saleable condition will be accepted for return, freight prepaid subject to a 15% or 20% (depending on product) restocking charge. Custom sizes, cut lengths or special ordered products are non-refundable and non-returnable. Return shipments must be made to the correct plant as noted on the return goods authorization. Failure to do so will incur a transportation fee deducted from the credit.

**RESTOCKING CHARGES:**

Full Rolls/Stock Sizes-15% • Broken Cases-20%

**SUPERIOR MANUFACTURING GROUP, INC.**

7171 West 65th Street • Chicago, Illinois 60638-4695  
(708) 458-4600 • (800) 621-2802  
FAX No. (800) 322-7105  
www.notrax.com




Superior Manufacturing Group, Inc.,  
is a proud member of the  
U.S. Green Building Council.

- **Sales Tip:** Use in toughest industrial environments where worker fatigue prevention is most critical. Ideal for multi-shift environments.
- **Where to Specify:** Any work cell where worker is at the station for prolonged periods of time.

- One of the 4 most comfortable mats available for dry area applications.
- Durable vinyl diamond-plate top surface is combined with dense closed cell foam base utilizing NOTRAX® exclusive UniFusion™ technology.
- UniFusion™ bond guaranteed for the life of the mat – See warranty for details
- Overall mat thickness is a full ONE-INCH.
- Sloped beveled foam on all 4 undersides affords easy access onto and off of mat.
- Manufacturer's warranty of 3 years is provided.
- Custom widths available



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® INDUSTRIAL MATS

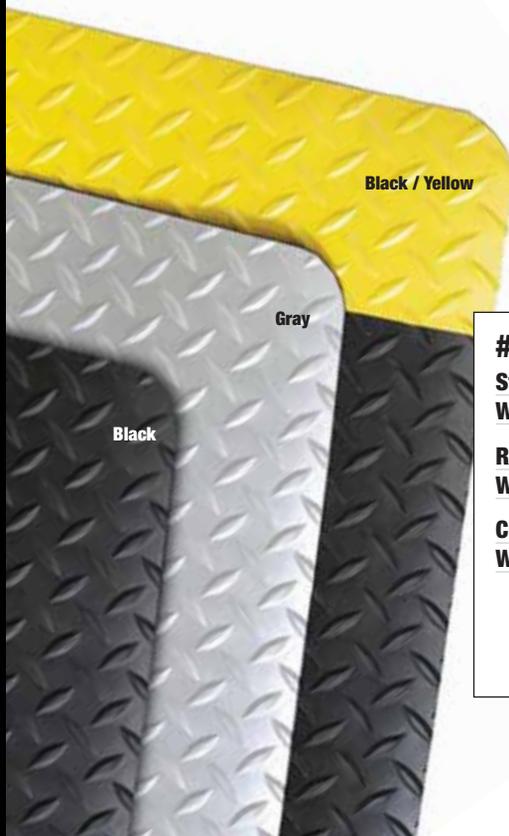

**#979 SADDLE TRAX™**

	2' x 3'	3' x 5'	3' x 12'	Custom Widths
<b>Stock Sizes</b>				
<b>Weight (lbs.)</b>	12	30	72	2.0/sq.ft.
<b>Roll Sizes</b>	2' x 75'	3' x 75'	4' x 75'	
<b>Weight (lbs.)</b>	300	450	600	
<b>Custom Sizes</b>	2' Widths	3' Widths	4' Widths	5' Widths
<b>Weight (lbs.)</b>	2.0/sq.ft.	2.0/sq.ft.	2.0/sq.ft.	2.0/sq.ft.


Shipping Location: Superior Manufacturing Group - Moselle, MS 39459  
 \* For applications on carpeted, finished or polished surfaces, Mat Hold (090 – pg.63) is recommended to minimize mat movement






- **Sales Tip:** Easy to sweep clean or damp mop top surface. Recommend where there is attention to fatigue prevention and concern for the mat to match a décor.
- **Where to Specify:** Lab testing areas, Check-out counters, Order fulfillment lines, Pharmacies.

- One of the 4 most comfortable mats available for dry area applications.
- Smooth marble-pattern top surface of heavy-duty rubber is combined with dense closed cell foam base utilizing NOTRAX® exclusive UniFusion™ technology.
- UniFusion™ bond guaranteed for the life of the mat – See warranty for details
- Overall mat thickness is a full ONE-INCH.
- Sloped beveled foam on all 4 undersides affords easy access onto and off of mat.
- Manufacturer's warranty of 3 years is provided.
- Custom widths available



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NOTRAX® INDUSTRIAL MATS

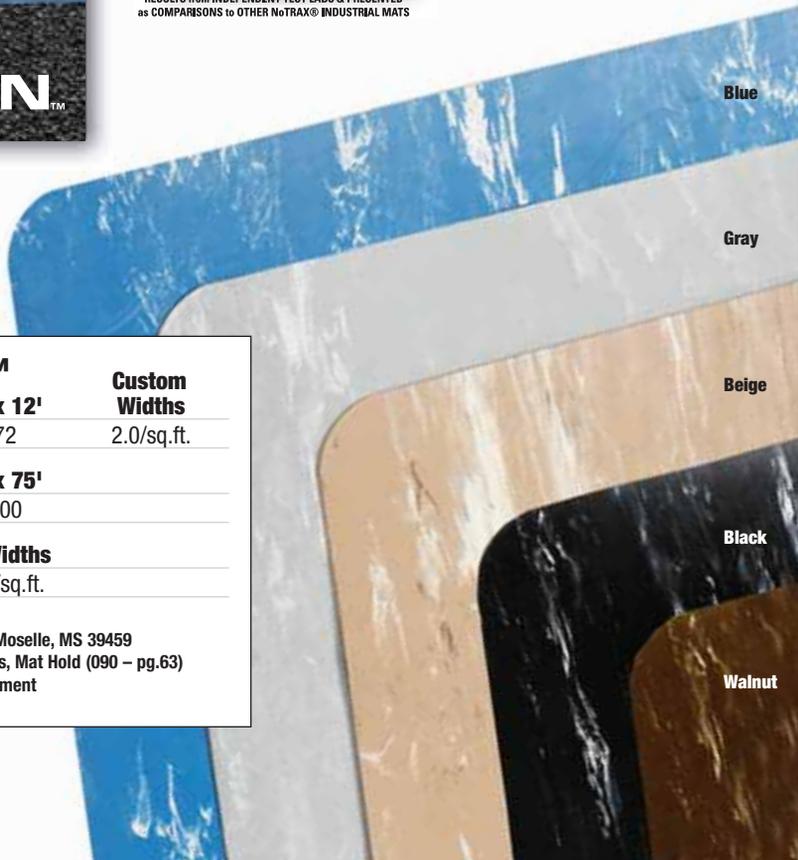

#970 MARBLE SOF-TYLE™ GRANDE™				
<b>Stock Sizes</b>	<b>2' x 3'</b>	<b>3' x 5'</b>	<b>3' x 12'</b>	<b>Custom Widths</b>
<b>Weight (lbs.)</b>	12	30	72	2.0/sq.ft.
<b>Roll Sizes</b>	<b>2' x 75'</b>	<b>3' x 75'</b>	<b>4' x 75'</b>	
<b>Weight (lbs.)</b>	300	450	600	
<b>Custom Sizes</b>	<b>2' Widths</b>	<b>3' Widths</b>	<b>4' Widths</b>	
<b>Weight (lbs.)</b>	2.0/sq.ft.	2.0/sq.ft.	2.0/sq.ft.	

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459  
 \* For applications on carpeted, finished or polished surfaces, Mat Hold (090 – pg.63) is recommended to minimize mat movement



- **Sales Tip:** Rubber top resists exposure to sparks from welding. Easy to clean non-directional top surface. Ideal for multi-shift environments.
- **Where to Specify:** Welding locations; work cells that are subjected to extreme traffic.

- One of the 4 most comfortable mats available for dry area applications.
- Pebble-embossed top surface of resilient SBR rubber is combined with dense closed cell foam base utilizing NOTRAX® exclusive UniFusion™ technology.
- UniFusion™ bond guaranteed for the life of the mat – See warranty for details
- Overall mat thickness is a full ONE-INCH.
- Sloped beveled foam on all 4 undersides affords easy access onto and off of mat.
- Manufacturer's warranty of 3 years is provided.
- Custom widths available



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NOTRAX® INDUSTRIAL MATS



Black

#980 PEBBLE TRAX® GRANDE™

Stock Sizes	2' x 3'	3' x 5'	3' x 12'	Custom Widths		
Weight (lbs.)	12	30	72	2.0/sq.ft.		
Roll Sizes & Custom Sizes	2' x 75'	3' x 75'	4' x 75'	2' Widths	3' Widths	4' Widths
Weight (lbs.)	180	270	360	2.0/sq.ft.	2.0/sq.ft.	2.0/sq.ft.

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459


\* For applications on carpeted, finished or polished surfaces, Mat Hold (090 – pg.63) is recommended to minimize mat movement






- **Sales Tip:** Ribs run the length of the mat. Rubber top resists exposure to sparks from welding. Ideal for multishift environments.
- **Where to Specify:** All busy work cells that require more slip resistance than average.

- One of the 4 most comfortable mats available for dry area applications.
- Corrugated ribbed top surface of resilient SBR rubber is combined with dense closed cell foam base utilizing NOTRAX® exclusive UniFusion™ technology.
- UniFusion™ bond guaranteed for the life of the mat – See warranty for details
- **Overall mat thickness is a full ONE-INCH.**
- Sloped beveled foam on all 4 undersides affords easy access onto and off of mat.
- Manufacturer's warranty of 3 years is provided.
- Custom widths available



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NOTRAX® INDUSTRIAL MATS

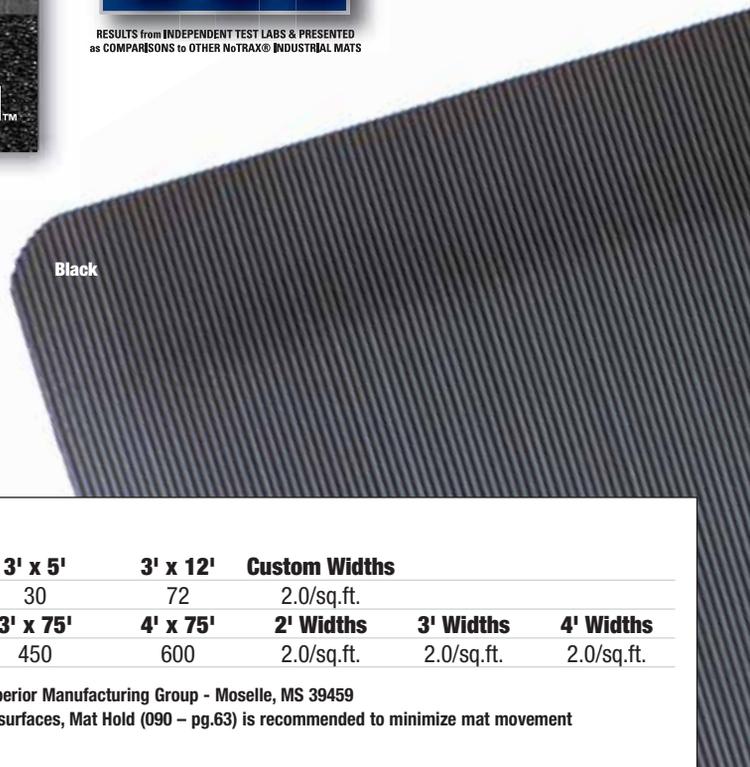

<b>#974 ERGO MAT™ GRANDE™</b>						
<b>Stock Sizes</b>	<b>2' x 3'</b>	<b>3' x 5'</b>	<b>3' x 12'</b>	<b>Custom Widths</b>		
<b>Weight (lbs.)</b>	12	30	72	2.0/sq.ft.		
<b>Roll Sizes &amp; Custom Sizes</b>	<b>2' x 75'</b>	<b>3' x 75'</b>	<b>4' x 75'</b>	<b>2' Widths</b>	<b>3' Widths</b>	<b>4' Widths</b>
<b>Weight (lbs.)</b>	300	450	600	2.0/sq.ft.	2.0/sq.ft.	2.0/sq.ft.

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459

\* For applications on carpeted, finished or polished surfaces, Mat Hold (090 – pg.63) is recommended to minimize mat movement




**CUSHION TRAX®**

- **Sales Tip:** Diamond surface provides non-directional slip resistance.
- **Where to Specify:** Machine operating stations needing fatigue prevention and sure footing.

- Durable vinyl diamond-plate top surface is combined with dense closed cell foam base utilizing NOTRAX® exclusive UniFusion™ technology.
- UniFusion™ bond guaranteed for the life of the mat – See warranty for details
- Overall mat thickness is 9/16 inch.
- Sloped beveled foam on all 4 undersides affords easy access onto and off of mat.
- Custom widths available



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NOTRAX® INDUSTRIAL MATS

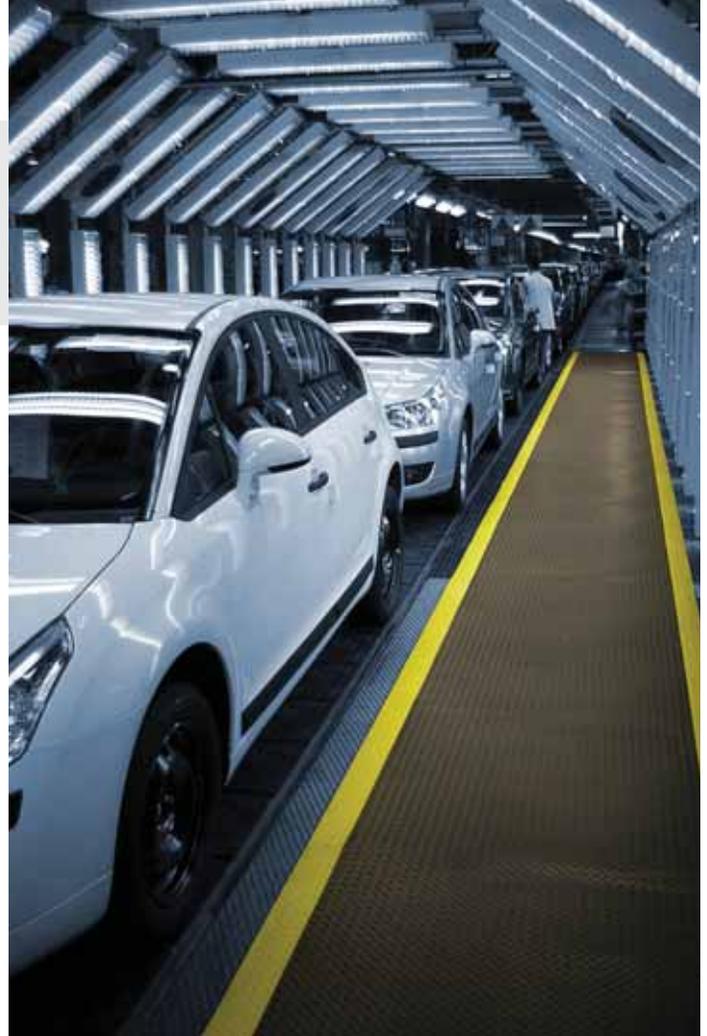

**#479 CUSHION TRAX™**

Stock Sizes	2' x 3'	3' x 5'	3' x 12'	Custom Widths
Weight (lbs.)	9	20	48	1.36/sq.ft.
Roll Sizes	2' x 75'	3' x 75'	4' x 75'	
Weight (lbs.)	215	320	425	
Custom Sizes	2' Widths	3' Widths	4' Widths	5' Widths
Weight (lbs.)	1.36/sq.ft.	1.36/sq.ft.	1.36/sq.ft.	1.36/sq.ft.

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459  
 \* For applications on carpeted, finished or polished surfaces, Mat Hold (090 – pg.63) is recommended to minimize mat movement


SAFETY / ANTI-FATIGUE • “DRY • BEST”





- **Sales Tip:** Easy to sweep clean or damp mop top surface. Recommended where there is a minimal amount of debris in the environment and a concern for the mat to match a décor.
- **Where to Specify:** Lab testing areas, Check-out counters, Order fulfillment lines.

- Smooth marble-pattern top surface of heavy-duty rubber is combined with dense closed cell foam base utilizing NOTRAX® exclusive UniFusion™ technology.
- UniFusion™ bond guaranteed for the life of the mat – See warranty for details
- Overall mat thickness is 1/2 inch.
- Sloped beveled foam on all 4 undersides affords easy access onto and off of mat.
- Custom widths available



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NOTRAX® INDUSTRIAL MATS



#470 MARBLE SOF-TYLE™				Custom Widths
<b>Stock Sizes</b>	<b>2' x 3'</b>	<b>3' x 5'</b>	<b>3' x 12'</b>	
<b>Weight (lbs.)</b>	9	23	54	1.49/sq.ft.
<b>Roll Sizes</b>	<b>2' x 75'</b>	<b>3' x 75'</b>	<b>4' x 75'</b>	
<b>Weight (lbs.)</b>	224	335	447	
<b>Custom Sizes</b>	<b>2' Widths</b>	<b>3' Widths</b>	<b>4' Widths</b>	
<b>Weight (lbs.)</b>	1.49/sq.ft.	1.49/sq.ft.	1.49/sq.ft.	

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459  
 \* For applications on carpeted, finished or polished surfaces, Mat Hold (090 - pg.63) is recommended to minimize mat movement




- **Sales Tip:** Rubber top resists exposure to sparks from welding. Easy to clean nondirectional top surface.
- **Where to Specify:** Welding locations.

- Pebble-embossed top surface of resilient SBR rubber is combined with dense closed cell foam base utilizing NOTRAX® exclusive UniFusion™ technology.
- UniFusion™ bond guaranteed for the life of the mat – See warranty for details
- Overall mat thickness is 1/2 inch.
- Sloped beveled foam on all 4 undersides affords easy access onto and off of mat.
- Custom widths available



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NOTRAX® INDUSTRIAL MATS

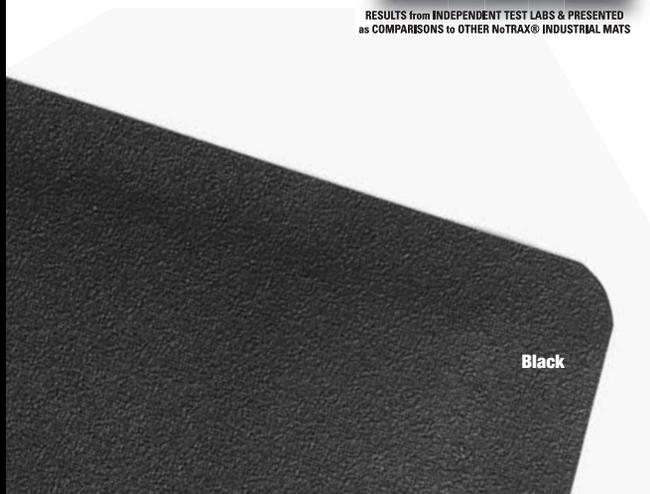

#480 PEBBLE TRAX®

Stock Sizes	2' x 3'	3' x 5'	3' x 12'	Custom Widths		
Weight (lbs.)	9	20	50	1.17/sq.ft.		
Roll Sizes & Custom Sizes	2' x 75'	3' x 75'	4' x 75'	2' Widths	3' Widths	4' Widths
Weight (lbs.)	176	264	351	1.17/sq.ft.	1.17/sq.ft.	1.17/sq.ft.

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459


\* For applications on carpeted, finished or polished surfaces, Mat Hold (090 – pg.63) is recommended to minimize mat movement





- **Sales Tip:** *Ribs run the length of the mat. Rubber top resists exposure to sparks from welding.*
- **Where to Specify:** *Any work cell that requires added slip resistance.*

- Corrugated ribbed top surface of resilient SBR rubber is combined with dense closed cell foam base utilizing NOTRAX® exclusive UniFusion™ technology.
- UniFusion™ bond guaranteed for the life of the mat – See warranty for details
- Overall mat thickness is 1/2 inch.
- Sloped beveled foam on all 4 undersides affords easy access onto and off of mat.
- Custom widths available



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NOTRAX® INDUSTRIAL MATS



**#474 ERGO MAT™**

<b>Stock Sizes</b>	<b>2' x 3'</b>	<b>3' x 5'</b>	<b>3' x 12'</b>	<b>Custom Widths</b>		
<b>Weight (lbs.)</b>	9	20	50	1.31/sq.ft.		
<b>Roll Sizes &amp; Custom Sizes</b>	<b>2' x 75'</b>	<b>3' x 75'</b>	<b>4' x 75'</b>	<b>2' Widths</b>	<b>3' Widths</b>	<b>4' Widths</b>
<b>Weight (lbs.)</b>	210	310	415	1.31/sq.ft.	1.31/sq.ft.	1.31/sq.ft.

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459

\* For applications on carpeted, finished or polished surfaces, Mat Hold (090 – pg.63) is recommended to minimize mat movement



- **Sales Tip:** The only mid-priced/high performance anti-fatigue sponge mat available; durability approaching that of competitive "laminated" mats. Extends service life by 50%.
- **Where to Specify:** Four top patterns to fit the needs of work stations where longer lasting fatigue protection is required.

- Unlike urethane or acrylic top coats that are applied after the mat is produced, Dyna-Shield® is manufactured into the mat to provide a long-wearing protection to the sponge anti-fatigue mat - Outperforms competitive products in tear resistance and tensile strength.
- Four designs of Dyna-Shield® sponge mats feature a 1/2 inch thickness.
- All four sides are beveled to minimize trip hazards.



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® INDUSTRIAL MATS



**DYNA-SHIELD®**



<b>#419 DIAMOND SOF-TRED™ (&amp; #406,#413,#417)</b>						
<b>Stock Sizes</b>	<b>2' x 3'</b>	<b>2' x 6'</b>	<b>3' x 4'</b>	<b>3' x 5'</b>	<b>3' x 6'</b>	<b>3' x 12'</b>
<b>Weight (lbs.)</b>	5	9.7	10	12.2	14.4	28.5
<b>Roll Sizes &amp; Custom Sizes</b>	<b>2' x 60'</b>	<b>3' x 60'</b>	<b>4' x 60'</b>	<b>2' Widths</b>	<b>3' Widths</b>	<b>4' Widths</b>
<b>Weight (lbs.)</b>	94	151	184.5	.78/sq.ft.	.78/sq.ft.	.78/sq.ft.

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459






**RAZORBACK® w/DYNA-SHIELD®**

**#406**



**BLADE RUNNER® w/DYNA-SHIELD®**

**#413**

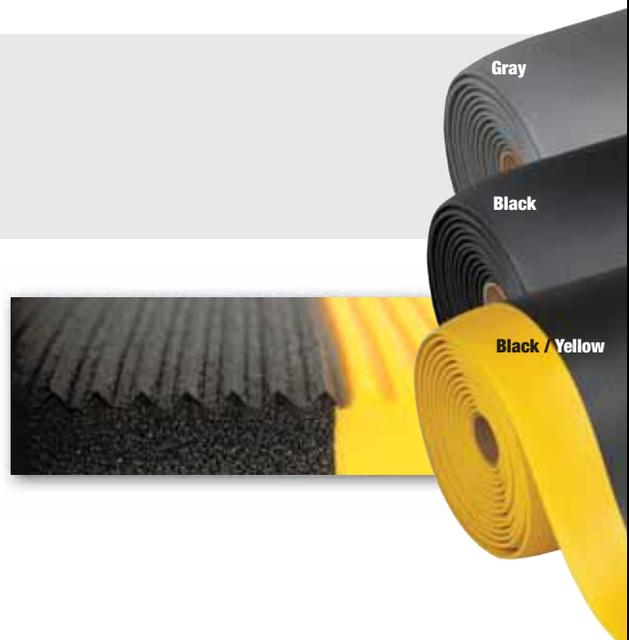

**BUBBLE SOF-TRED™ w/DYNA-SHIELD®**

**#417**



# PEBBLE STEP SOF-TRED™

w/DYNA-SHIELD®

- **Sales Tip:** Offers better than average fatigue relief in a mat that outlasts traditional "sponge" matting.
- **Where to Specify:** Work stations where the need for longer lasting fatigue protection is required.

- Pebble-embossed PVC sponge manufactured with NOTRAX® exclusive Dyna-Shield® protective top layer - Outperforms competitive products in tear resistance and tensile strength.
- Non-directional top surface ensures excellent traction while remaining easy to clean.
- Overall thickness is 3/8 inch.
- All four sides are beveled to minimize trip hazards.



## #415 PEBBLE STEP SOF-TRED™

Stock Sizes	2' x 3'	2' x 6'	3' x 4'	3' x 5'	3' x 6'	3' x 12'
Weight (lbs.)	4.1	7.56	7.56	10.2	12	23.7
Roll Sizes & Custom Sizes	2' x 60'	3' x 60'	4' x 60'	2' Widths	3' Widths	4' Widths
Weight (lbs.)	76	114.6	150.9	.64/sq.ft.	.64/sq.ft.	.64/sq.ft.

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® INDUSTRIAL MATS

# SUPERFOAM®



- **Sales Tip:** Extremely light-weight anti-fatigue mat designed especially for ease of handling and ergonomic comfort.
- **Where to Specify:** For environments where traditionally much heavier and bulkier mats are used such as: assembly lines, workstations, laboratories, and even home workshops.

- Made from a closed cell PVC Nitrile foam blend, does not absorb liquids and is highly resistant to greases, oils, animal & vegetable fats.
- Overall thickness is 5/8 inch.
- Available in rolls & custom lengths.
- All four sides are beveled to minimize trip hazards (even on rolls and custom lengths).



Black

## #T17 SUPERFOAM®

Stock Sizes	3' x 2'	3' x 3'	3' x 4'	3' x 5'	3' x 6'	3' x 8'
Weight (lbs.)	4.8	7.3	9.7	12.1	14.5	19.4
Roll Sizes & Custom Sizes	3' x 75'	4' x 75'	3' Widths	4' Widths		
Weight (lbs.)	181.4	241.9	.81/sq.ft.	.81/sq.ft.		

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459



# AIRUG® SOF-TRED™

#410  
#411

SAFETY / ANTI-FATIGUE • "DRY • GOOD"



#410

- **Sales Tip:** Recommend the AIRUG® ribbed version for gripping features; SOF-TRED™ version for easy sweeping.
- **Where to Specify:** Work stations where anti-fatigue matting is needed at a low cost.



#411


- Basic anti-fatigue protection provided through 2 versions of this Industry standard.
- PVC closed cell foam relieves leg and back discomfort; provides a barrier to cold floors.
- Overall thickness is 3/8 inch (Sof-Tred also available in 9/16")
- All four sides are beveled to minimize trip hazards.



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® INDUSTRIAL MATS



#410

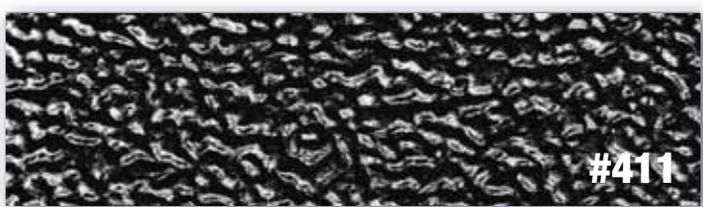

#411



#411 Black

#410 Gray

#410 Black

#410 Black / Yellow

## #410 AIRUG® (& #411)

Stock Sizes	27" x 3'	27" x 5'	2' x 3'	3' x 5'	3' x 12'
Weight (lbs.) 3/8" thick	3.5	5.6	3	7.4	17
Weight (lbs.) 9/16" thick	N/A	N/A	6	16	37

Roll Sizes & Custom Sizes	2' x 60'	3' x 60'	4' x 60'	*6' x 60'	2' Widths	3' Widths	4' Widths
Weight (lbs.) 3/8" thick	53.6	80.9	106	162	0.45/sq.ft.	0.45/sq.ft.	0.45/sq.ft.
Weight (lbs.) 9/16" thick	125	185	250	N/A	1.00/sq.ft.	1.00/sq.ft.	1.00/sq.ft.

\*Black Only

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459



#850  
#856


**NIRU® CUSHION-EASE® GSII™**  
**NIRU® CUSHION-EASE® GSII™ SOLID**

SAFETY / ANTI-FATIGUE • "WET/DRY" • SUPERIOR™

- **Sales Tip:** GSII™ excels in the harshest industrial environments because it resists the chemicals, oils, and greases that cause traditional rubber matting to breakdown.
- **Where to Specify:** (850) Intended for harsh wet environments where industrial chemicals, oils, and greases are commonly found. (856) should be recommended for industrial applications where exposure to chemicals, oils, and grease is light to moderate.
- GSII™ technology offers the ultimate in durability and performance in the harshest environments
- 100% Nitrile rubber compound provides the highest degree of resistance to chemicals, oils, and greases while Silicon Carbide grit surface provides long lasting traction
- Available in perforated (850), or solid top (856) versions
  - 850 has a large hole drainage system that facilitates the removal of liquid and debris from the work area
  - 856 offers solid-top construction for additional anti-fatigue relief, and is easy to clean
- Overall thickness is 3/4"
- Modular design is compatible with NoTrax® 551 M.D. Ramp System and can accommodate a variety of custom configurations (see page 24 for more information)



**GSII™**

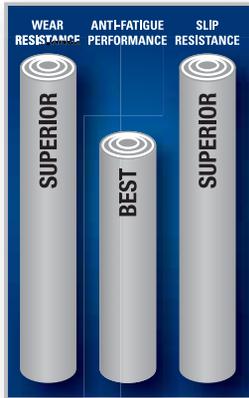

RESULTS FROM INDEPENDENT TEST LABS & PRESENTED AS COMPARISONS TO OTHER NoTRAX® INDUSTRIAL MATS

**Grit Detail**



Part of the Solutions™ product line. See pages 30 – 31 for details.

**Solutions™**  
BY NOTRAX®

**#850/856 Niru® Cushion-Ease® GSII™/GSII™ Solid**

Stock Size	3' x 3'	3' x 5'
Weight (lbs.) #850	24	42
Weight (lbs.) #856	30	N/A

Shipping Location: Superior Manufacturing Group - Chicago, IL 60638



#850

**NIRU® CUSHION-EASE®  
NIRU® CUSHION-EASE® SOLID**

**#650  
#656**

**SAFETY / ANTI-FATIGUE • "WET/DRY" • SUPERIOR™**



- **Sales Tip:** The amount of slip resistance required, and exposure to chemicals, oils, and greases are the key determining factors when choosing between GSII™ or Niru® Cushion-Ease® products
- **Where to Specify:** (650) Intended for harsh wet environments where industrial chemicals, oils, greases, and animal fats are often found. (656) should be recommended for industrial applications where exposure to chemicals, oils, greases, and animal fats can create slip hazards.

- 100% Nitrile rubber compound provides the highest degree of resistance to chemicals, oils, and greases
- Available in perforated (650), or solid top (656) versions
  - 650 has a large hole drainage system that facilitates the removal of liquid and debris from the work area
  - 656 offers solid-top construction for additional anti-fatigue relief, and is easy to clean
- Overall thickness is 3/4"
- Modular design is compatible with NoTrax® 551 M.D. Ramp System and can accommodate a variety of custom configurations (see page 24 for more information)



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NOTRAX® INDUSTRIAL MATS



Part of the Solutions™ product line. See pages 30 – 31 for details.

**Solutions™**  
BY NOTRAX®

**#650/656 Niru® Cushion-Ease® Solid**

Stock Size	3' x 3'	3' x 5'
Weight (lbs.) #650	23	40
Weight (lbs.) #656	29	N/A

Shipping Location: Superior Manufacturing Group - Chicago, IL 60638




#650


# SAFETY STANCE®

SAFETY / ANTI-FATIGUE • "WET/DRY" • SUPERIOR™

- **Sales Tip:** Borders are a 100% nitrile rubber compound offering the same resistance to oils/chemicals as the mat – competitor's products use vinyl borders which can degrade.
- **Where to Specify:** All heavy Industrial environments and work cells that require worker protection from fatigue, spillage of liquids, heavy cart traffic.
- Resilient rubber compound withstands industrial cutting oils and chemicals.
- Large hole configuration facilitates drainage and resists clogging while mini-diamond studs on top surface minimize slippage.
- Colored beveled borders are permanently affixed to the mat (unlike competitors' snap-ins that come loose) and are available on 3 or 4 sides.
- Overall mat thickness is 7/8 inch.

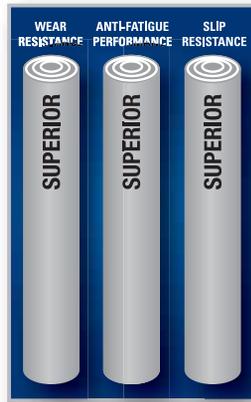

RESULTS FROM INDEPENDENT TEST LABS & PRESENTED AS COMPARISONS TO OTHER NoTRAX® INDUSTRIAL MATS

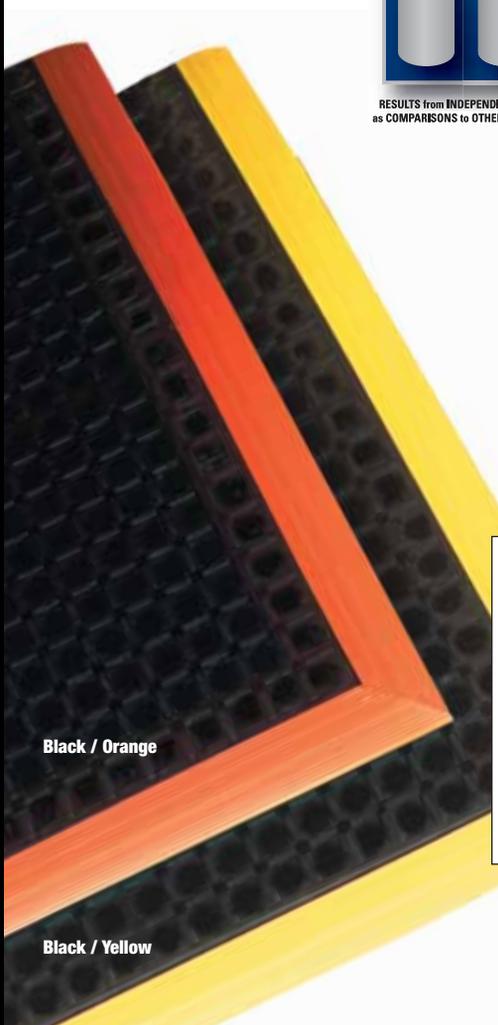

Black / Orange

Black / Yellow

## #549 SAFETY STANCE®

Stock Sizes	26" x 40"	38" x 40"	38" x 64"	38" x 124"
Weight (lbs.)	23	32	52	100
4-sided borders				
Stock Sizes	28" x 40"	40" x 40"	40" x 64"	40" x 124"
Weight (lbs.)	24	33	55	105

Shipping Location: Superior Manufacturing Group - Chicago, IL 60638





**NEW**

**DIAMOND FLEX-LOK™**

**#620**

**SAFETY / ANTI-FATIGUE • "WET/DRY" • SUPERIOR™**


- **Sales Tip:** Factory-assembled custom configurations available – Call Customer Service for more information (800) 621-2802
- **Where to Specify:** Wet environments where anti-fatigue, drainage, and slip resistance are all a priority. PVC construction makes it especially resistant to chemicals found in harsh wet environments. Where custom configurations are a consideration.

- A PVC based workstation mat that combines the durability and toughness of an industrial mat with true ergonomic support and comfort.
- A multi-tiered footing design elevates the mat off the floor, creating air pockets that flex with the weight of the worker.
- A large hole drainage system facilitates the removal of liquids and debris from the work area.
- Beveled ramps eliminate trip hazards.
- PVC Construction offers resistance to chemicals, cutting fluids, oils and greases.
- A pronounced raised diamond pattern on the mat surface, and an inverted-V pattern on the ramps provide additional traction.
- Sorbent pads can easily be placed underneath the mat in extremely wet applications
- A permanent interlock system ensures that the mat will not come apart, eliminating the need for potentially harmful adhesives.



**UNDERSIDE FOOTING**

**INTERLOCK SYSTEM**

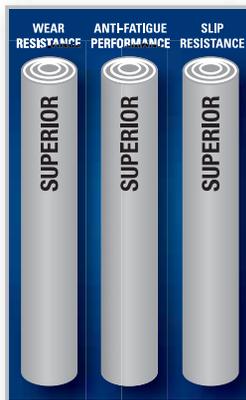

RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® INDUSTRIAL MATS

**Tiles: Black**  
**Ramps & Corners: Black/Yellow**

**#620 DIAMOND FLEX-LOK™**


<b>Stock Sizes</b>	<b>30" x 36"</b>	<b>30" x 48"</b>	<b>30" x 60"</b>	<b>30" x 72"</b>	<b>30" x 96"</b>	<b>42" x 72"</b>	<b>42" x 96"</b>	<b>42" x 120"</b>
<b>Weight (lbs.)</b>	22	29	37	29	56	62	81	95
	<b>Tiles (12" x 12")</b>		<b>Ramps (6" x 12")</b>		<b>Corners (6" x 6")</b>			
<b>Weight (lbs.)</b>	2/ea.		.76/lin.ft.		.39/ea.			

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459



- **Sales Tip:** The first anti-fatigue mat designed specifically for combined use with a sorbent pad.
- **Where to Specify:** Wet environments where anti-fatigue is needed and where pooling liquids can create a safety hazard. In applications where sorbent pads are currently used.

- Made from a 100% Nitrile rubber compound that is extremely resistant to chemicals, cutting fluids, oils, and greases.
- Available in both stock sizes and on-site custom configurations to accommodate a variety of workstation layouts.
- A raised footing system design on the underside of the mat provides cushioning comfort and aeration.
- Molded beveled borders allow for easy access on to and off of the mat, while a recessed top surface acts as a tray that holds the sorbent pad and traps liquids.
- The tray top surface has a series of molded pins that grip and hold the sorbent pad in place.
- Designed to comfortably accommodate a standard 30" wide sorbent pad. (Inside tray width – 32")
- Overall mat thickness is 3/4"

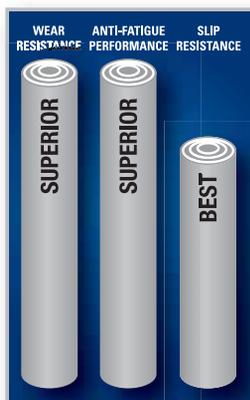

RESULTS FROM INDEPENDENT TEST LABS & PRESENTED AS COMPARISONS TO OTHER NoTRAX® INDUSTRIAL MATS



Black

#580 SORB STANCE™ (Sorbent pads sold separately)			
<b>Stock Sizes</b>	<b>3' x 5'</b>	<b>3' x 10'</b>	<b>3' x 15'</b>
<b>Weight (lbs.)</b>	40	80	120


Shipping Location: Superior Manufacturing Group - Chicago, IL 60638






- **Sales Tip:** Multiple mats can be affixed together on-site with the use of optional connector strips.
- **Where to Specify:** Any heavy Industrial environment or work cell that needs to offer worker protection from fatigue and spillage of liquids.

- Resilient rubber compound withstands industrial greases, cutting oils and chemicals.
- Large hole configuration facilitates drainage and resists clogging.
- A nitrile version is also available for use in food processing applications.
- Overall mat thickness is 7/8 inch.
- Note: Mat has squared, not beveled edges.
- Modular design is compatible with NoTrax® 551 M.D. Ramp System and can accommodate a variety of custom configurations (see page 24 for more information)

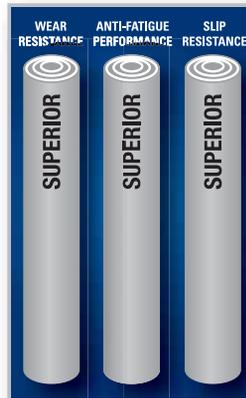

RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® INDUSTRIAL MATS

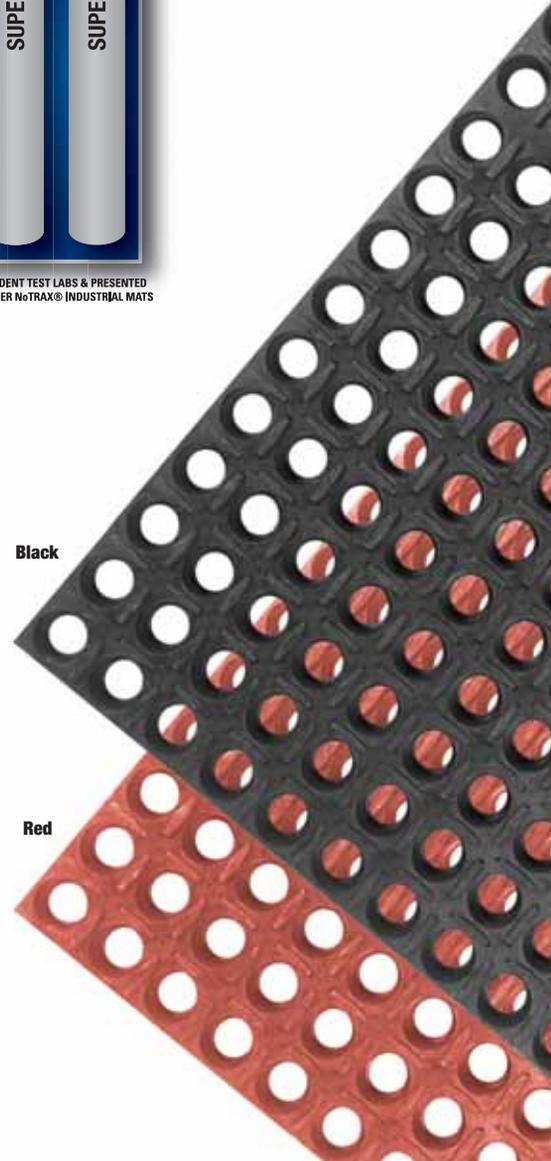

#543 CUSHION-TRED™

<b>Size/Color</b>	<b>2' x 3' - Black</b>	<b>3' x 3' - Black</b>	<b>3' x 5' - Black</b>
<b>Weight (lbs.)</b>	19	29	49

<b>Size/Color</b>	<b>2' x 3' - Red</b>	<b>3' x 3' - Red</b>	<b>3' x 5' - Red</b>
<b>Weight (lbs.)</b>	19	29	49

<b>Description</b>	<b>M.D. Ramps</b>	<b>Connectors</b>
<b>Color</b>	(Black or Red)	(Black only)
<b>Size</b>	up to 5' ea	1' length
<b>Weight (lbs.)</b>	.7/lin.ft.	.33

Shipping Location: Superior Manufacturing Group - Chicago, IL 60638



#520  
#522


**CUSHION-LOK™ PERFORATED SERIES**  
**CUSHION-LOK™ w/ Grip-Step®**

SAFETY / ANTI-FATIGUE • "WET/DRY" • BEST™

- **Sales Tip:** Factory-assembled custom configurations available - Call Customer Service for more information (800) 621-2802
- **Where to Specify:** Wet environments where drainage and slip resistance are a priority. PVC construction makes it especially resistant to chemicals found in harsh environments. Where custom configurations are a consideration.
- A tough PVC based workstation mat developed by NOTRAX® over 30 years ago to be a truly Superior mat.
- Hundreds of portholes facilitate drainage while the worker is elevated on a series of traction blades to help resist slippage and keep the worker out of the spillage.
- Six-inch wide diamond-studded beveled ramps are permanently affixed on 3 sides and perforated for drainage.
- Full 7/8 inch thickness.
- Offered in 4 versions to fit the most demanding environments:
- #520 Cushion-Lok™: All the durability as described but with a bottom surface design that affords maximum flex for worker comfort.
- #522 Cushion-Lok™ with Grip-Step®: Same as #520 but with a thick gritted layer applied to the top surface for extremely slippery environments.
- #520 HD Cushion-Lok™ Heavy-Duty: This is the workhorse! All of the above benefits but with a reinforced bottom surface design that repels crushing from extreme weights.
- #522 HD Cushion-Lok™ Heavy-Duty with Grip-Step®: Same as #520HD but with a thick gritted layer applied to the top surface for extremely slippery environments.



#522 Detail

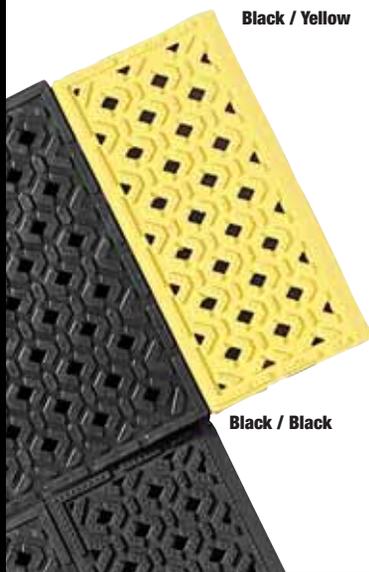

Black / Yellow

Black / Black





RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NOTRAX® INDUSTRIAL MATS



Standard Bottom

HD Bottom




**CUSHION-LOK™ SERIES**

Stock Sizes	30" x 36"	30" x 48"	30" x 60"	30" x 72"	30" x 96"	42" x 72"	42" x 96"	42" x 120"
Weight (lbs.) #522	13	18	23	29	37	41	52	62
Weight (lbs.) #520HD	22	29	37	44	56	62	81	95

\* call for pricing of individual tiles, ramps, and corners

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459



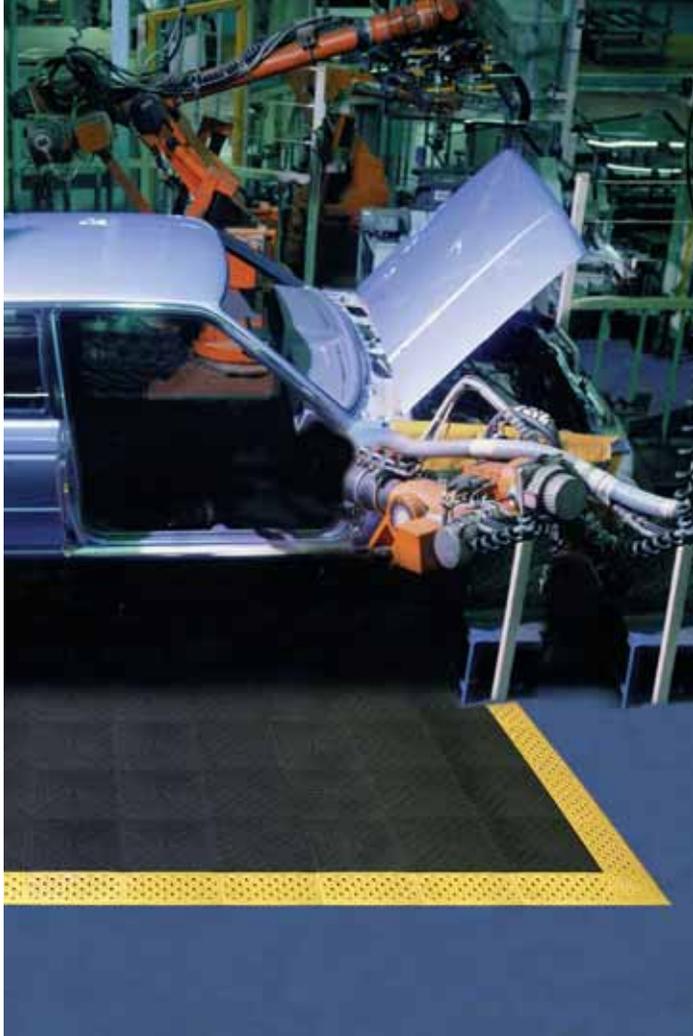

**CUSHION-LOK™ SOLID-TOP SERIES**  
**CUSHION-LOK™ w/ Grip-Step®**


**#920**  
**#922**

**SAFETY / ANTI-FATIGUE • "WET/DRY" • BEST™**


- **Sales Tip:** Factory-assembled custom configurations available - Call Customer Service for more information (800) 621-2802
- **Where to Specify:** Where anti-fatigue and anti-slip is a necessity. PVC construction makes it especially resistant to chemicals found in harsh environments. Where custom configurations are a consideration.

- A sister product to the Cushion-Lok™ #520 Series. This Series features a solid top/no perforation mat that can be interlocked with the #520 Series or used as a standalone mat.
- The worker is elevated on a series of traction blades that provide sure-footing and comfort.
- Six-inch wide diamond-studded beveled ramps are permanently affixed and perforated for any incidental drainage.
- Full 7/8 inch thickness.
- Offered in 2 versions to fit the most demanding environments:
- #920 HD Cushion-Lok™ Heavy-Duty Solid: Maximum resistance to crushing featuring a reinforced bottom surface and firm support for the worker.
- #922 HD Cushion-Lok™ Heavy-Duty Solid with Grip-Step®: Same as #920HD but with a thick gritted layer applied to the top surface for extremely slippery environments.

**#922 Detail**

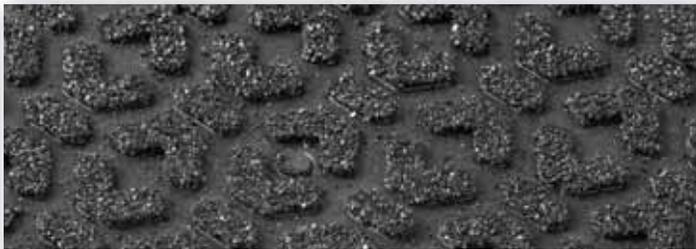

**HD Bottom**



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® INDUSTRIAL MATS



**SOLID CUSHION-LOK™ SERIES**

<b>Stock Sizes</b>	<b>30" x 36"</b>	<b>30" x 48"</b>	<b>30" x 60"</b>	<b>30" x 72"</b>	<b>30" x 96"</b>	<b>42" x 72"</b>	<b>42" x 96"</b>	<b>42" x 120"</b>
<b>Weight (lbs.)</b>	23	31	38	46	61	64	86	107


Shipping Location: Superior Manufacturing Group - Moselle, MS 39459



- **Sales Tip:** Easy to make custom configurations on-site by utilizing the patent pending #551 MD Ramp System™. (See page 24 for details).
- **Where to Specify:** Wet environments where comfort and durability are critical.
- A resilient rubber compound and unique support design offers exceptional fatigue relief. Large hole drainage design keeps moisture and debris free from worker platform.
- Easy to snap together mats on-site for custom work station platforms.
- Optional nitrile rubber borders available for trip-resistant platform.
- Available in 2 versions: (1) Black mat which is grease resistant and carries a 1-year warranty. (2) Red mat with extra nitrile content is grease-proof and carries a 3-year warranty.
- Overall thickness is 3/4 inch.



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® INDUSTRIAL MATS

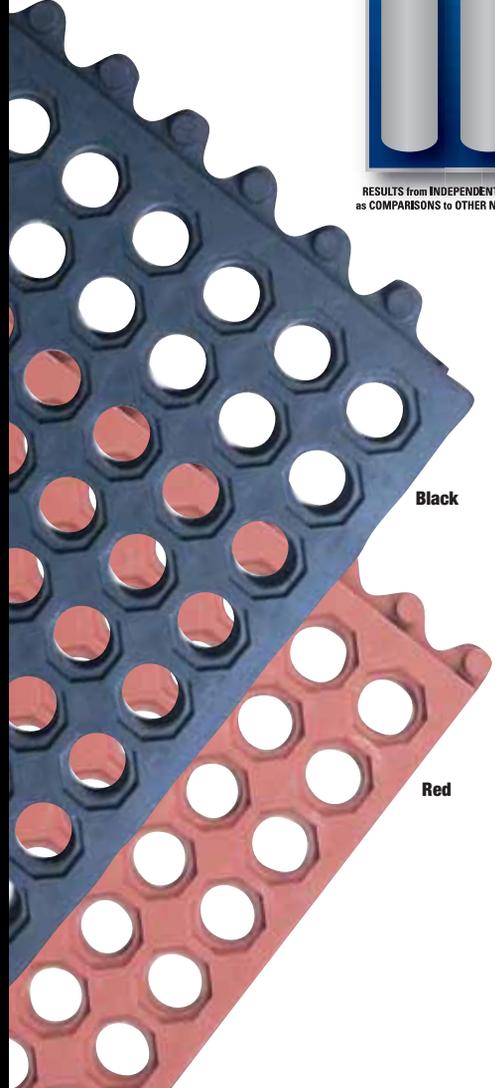

Black

Red

#550 CUSHION-EASE®		
<b>Size/Color</b>	<b>3' x 3' - Black</b>	<b>3' x 5' - Black</b>
<b>Weight (lbs.)</b>	24	39
<b>Size/Color</b>	<b>3' x 3' - Red</b>	<b>3' x 5' - Red</b>
<b>Weight (lbs.)</b>	24	39

Shipping Location: Superior Manufacturing Group - Chicago, IL 60638





- **Sales Tip:** Easy to make custom configurations on-site by utilizing the patent pending #551 MD Ramp System™. (See page 24 for details).
- **Where to Specify:** Dry environments where comfort and durability are critical.

- A sister product to the #550 Cushion-Ease™, this version also features a resilient rubber compound and unique support design to provide exceptional fatigue relief. Can be locked together on-site with #550.
- Easy to snap together mats on-site for custom work station platforms
- Optional nitrile rubber borders available for trip-resistant platform.
- Available in 2 versions: (1) Black mat which is grease resistant and carries a 1-year warranty. (2) Red mat with extra nitrile content is grease-proof and carries a 3-year warranty.
- Overall thickness is 3/4 inch.



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® INDUSTRIAL MATS



Red



Black



<b>#556 CUSHION-EASE® SOLID</b>		
<b>Size/Color</b>	<b>3' x 3' - Black</b>	<b>3' x 3' - Red</b>
<b>Weight (lbs.)</b>	29	29
Shipping Location: Superior Manufacturing Group - Chicago, IL 60638		





# M.D. RAMP SYSTEM™

SAFETY / ANTI-FATIGUE • “WET/DRY”

- **Sales Tip:** Works just like a picture frame. Detailed instructions included with product. Mats can be made into any width and/or length required in 1' increments.

- For custom configuration performed on-site the patented #551 MD Ramp System™ can be purchased separately. These 100% nitrile rubber ramps fit the male/female locking system of the mat and are available as:
  - 2 foot long Male Ramps
  - 3 foot long Male Ramps or Female Ramps
  - 5 foot long Male Ramps or Female Ramps
- All Ramps lengths are beveled and molded with mitered corners and a protruding tab. The tab locks together the two adjoining ramps for a secure, professional corner. For a square edge, simply cut-off the miter following the cut line on the bottom of the ramp.

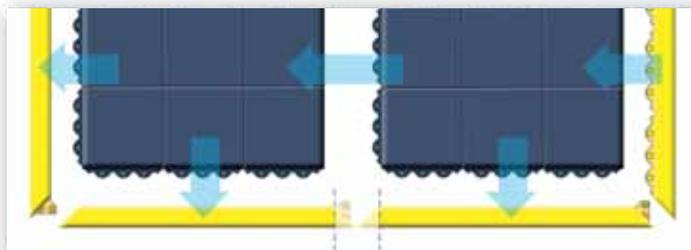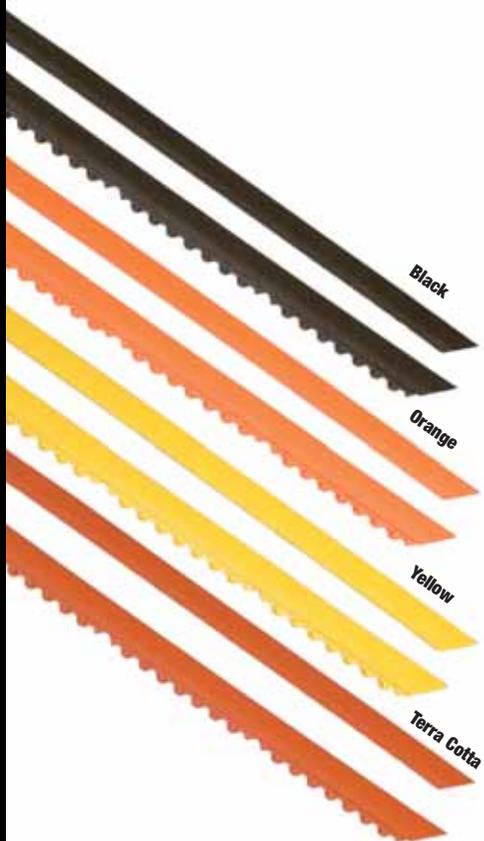

<b>#551 M.D. RAMP SYSTEM™</b>					
<b>Size</b>	<b>2' Male</b>	<b>3' Male</b>	<b>3' Female</b>	<b>5' Male</b>	<b>5' Female</b>
<b>Weight (lbs.)</b>	1.2	1.8	1.6	3.0	3.0
<b>Connectors</b>	(Black only)				
<b>Size</b>	1' length				
<b>Weight (lbs.)</b>	.33				
Shipping Location: Superior Manufacturing Group - Chicago, IL 60638					



**NEW** ECO STANCE™

#585



**SAFETY / ANTI-FATIGUE • “WET/DRY • BEST”**

- **Sales Tip:** One of the first anti-fatigue mats designed specifically for combined use with a sorbent pad.
- **Where to Specify:** Wet application environments where sorbent pads are often used to alleviate safety hazards. Where anti-fatigue properties are needed.

- Made from a 100% Nitrile rubber compound, Eco Stance™ is a light-weight and economical solution - extremely resistant to chemicals, cutting fluids, oils, and greases.
- A molded bubble pattern on the surface of the mat provides cushioning comfort and aeration.
- Molded beveled borders allow for easy access on to and off of the mat, while a recessed top surface acts as a tray that holds the sorbent pad and traps liquids.
- Molded pins on the raised bubbles holds the sorbent pad in place.
- Designed to comfortably accommodate a standard 30" wide sorbent pad. (Inside tray width – 32")
- Overall mat thickness is 3/4"



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® INDUSTRIAL MATS

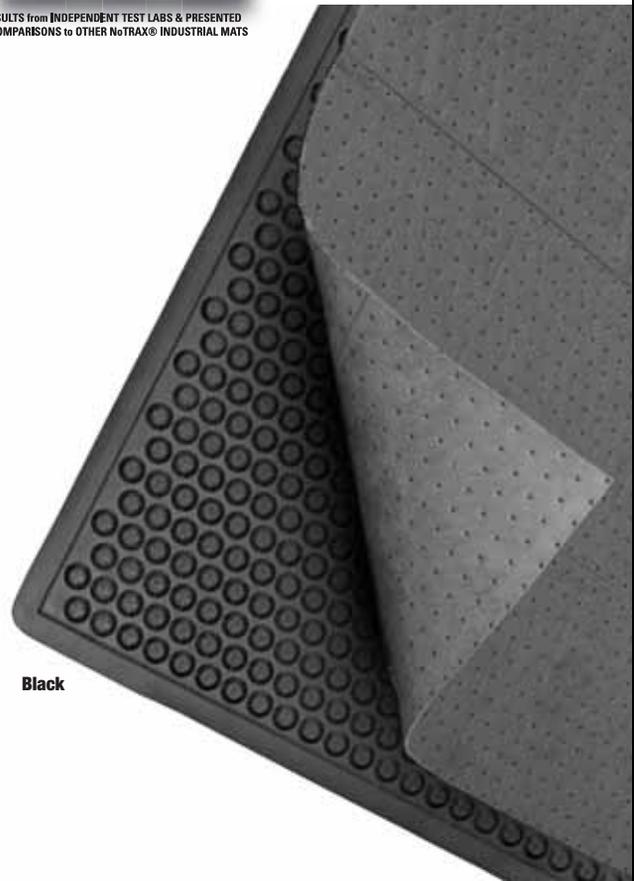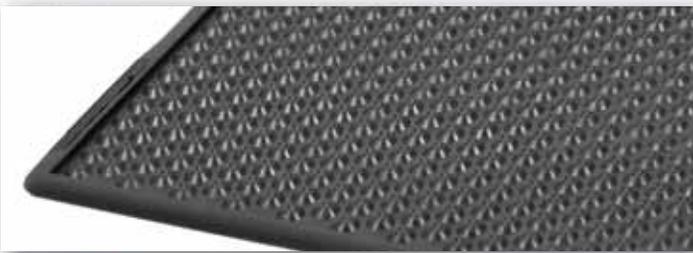

Black

<b>#585 ECO STANCE™</b> (sorbent pads sold separately)	
<b>Size/Color</b>	<b>3' x 5' - Black</b>
<b>Weight (lbs.)</b>	22
Shipping Location: Superior Manufacturing Group - Chicago, IL 60638	



#420  
#422


**CUSHION-DEK™**  
**CUSHION-DEK™ w/ Grip-Step®**

- **Sales Tip:** Factory-assembled custom configurations available - Call Customer Service for more information (800) 621-2802
- **Where to Specify:** Harsh environments that require a surface with traction and anti-fatigue properties.


- Tough PVC compound molded with a raised pyramid design to enhance traction.
- Slotted perforations (1/2" wide by 1-7/8" long) allow for moisture to escape worker platform.
- Studded bottom surface raises mat and allows for channeling of moisture and continuous aeration.
- Overall thickness is 7/16 inch.
- Offered in 2 versions:
- #420 Cushion-Dek™: All the durability and features as described.
- #422 Cushion-Dek™ with Grip-Step®: Same as #420 but with a thick gritted layer applied to the top surface for extremely slippery environments.



Black

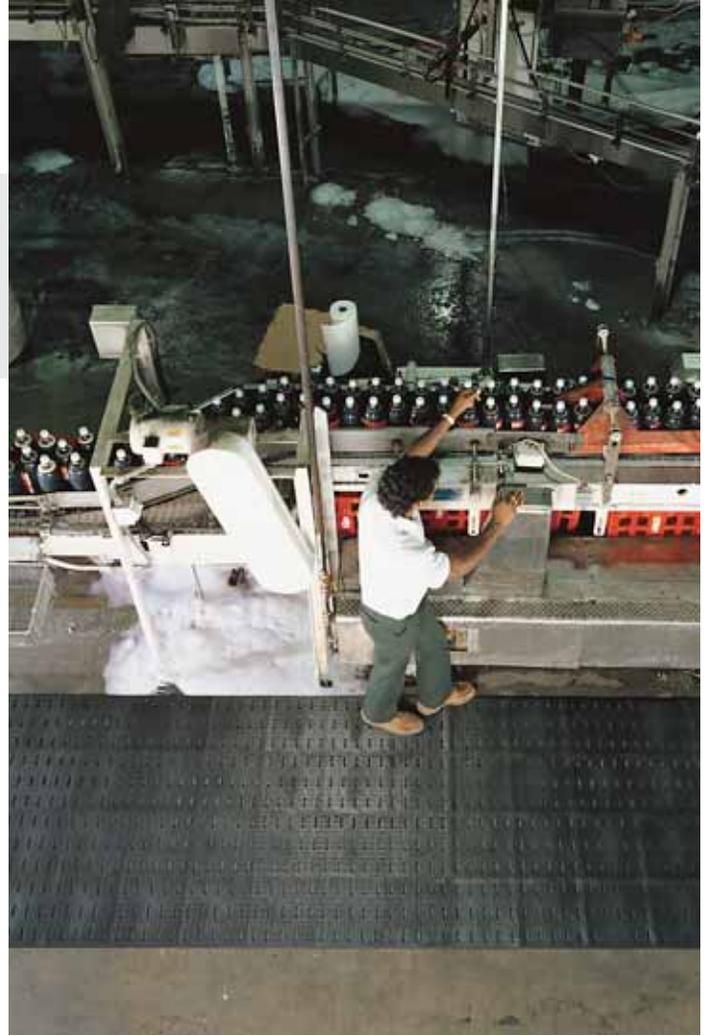

#422 Detail

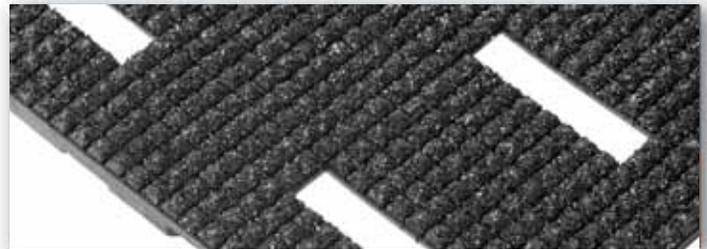

**CUSHION-DEK™ SERIES**

Stock Sizes	2' x 3'	2' x 6'	3' x 4'	3' x 6'	3' x 10'	4' x 6'	4' x 8'
Weight (lbs.) #420	8	15	15	22	36	29	39
Weight (lbs.) #422	9	18	18	27	45	36	48
Roll Sizes & Custom Sizes	2' x 30'	3' x 30'	4' x 30'	2' Widths	3' Widths	4' Widths	
Weight (lbs.) #420	72	108	156	1.20/sq.ft.	1.20/sq.ft.	1.20/sq.ft.	
Weight (lbs.) #422	89	134	178	1.48/sq.ft.	1.48/sq.ft.	1.48/sq.ft.	

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459

SAFETY / ANTI-FATIGUE • "WET/DRY" • BETTER™





- **Sales Tip:** Competitive products feature only a flat or hollowed bottom which reduces the comfort of the mat.
- **Where to Specify:** Dry applications where there is a good deal of pivoting required.

- Extremely long-lasting rubber compound molded into a superbly comfortable bubble design.
- For maximum comfort, the bubbles are molded on an offset on the top and bottom of the mat to maximize flex and create air flow, all to enhance the ergonomic benefit.
- All 4 sides feature an integral bevel border system.
- Overall thickness is 3/8 inch.



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® INDUSTRIAL MATS



Black

#447 COMFORT-EZE™

<b>Stock Sizes</b>	<b>18" x 24"</b>	<b>24" x 36"</b>	<b>30" x 30"*</b>	<b>30" x 60"</b>	<b>30" x 10"***</b>	<b>30" x 20"***</b>
<b>Weight (lbs.)</b>	6	10	10	20	40	80

\*Beveled edges on 3 sides only \*\*Multiple 30" x 60" mats bonded together

Shipping Location: Superior Manufacturing Group - Chicago, IL 60638




**SAFETY / ANTI-FATIGUE • “WET/DRY” • BETTER™**

- **Sales Tip:** Ideal for one-worker stations. Cannot be extended beyond sizes offered.
- **Where to Specify:** Wet environments that require basic fatigue relief.

- A durable rubber compound formed with an alternating large and small hole drainage system to keep moisture and debris free from worker platform.
- Raised pattern surround large holes to channel drainage and provide worker traction.
- All 4 sides feature integral beveled ramps to minimize trip hazards.
- Available in 2 versions: (1) Black mat which is grease resistant and carries a 1-year warranty. (2) Red mat with extra nitrile content is grease-proof and carries a 3-year warranty.
- Overall thickness is 1/2 inch.



RESULTS FROM INDEPENDENT TEST LABS & PRESENTED AS COMPARISONS TO OTHER NoTRAX® INDUSTRIAL MATS

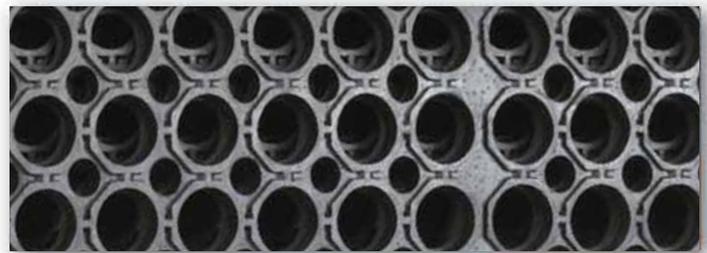

Red

**#562 SANITOP®**

<b>Size/Color</b>	<b>3' x 5' - Black</b>	<b>3' x 10'* - Black</b>	<b>3' x 20'* - Black</b>
<b>Weight (lbs.)</b>	27	54	108

<b>Size/Color</b>	<b>3' x 5' - Red</b>	<b>3' x 10'* - Red</b>	<b>3' x 20'* - Red</b>
<b>Weight (lbs.)</b>	27	54	108

**\*Consists of multiple mats bonded together. One inch of ramp is cut off to bond mats; therefore, overall length is slightly less**

Shipping Location: Superior Manufacturing Group - Chicago, IL 60638

Black





- **Sales Tip:** Can only make custom lengths, not widths. A perfect mat offered as a "bin" item to industry. Store extra sections on-site so sections damaged by forklift, etc. Can quickly and easily be replaced.
- **Where to Specify:** Wet or dry environments where long runs of anti-fatigue matting are needed

- Solid rubber construction formed with a diamond deckplate pattern on top surface.
- A sturdy waffle support system on the underside achieves maximum safety and comfort for the worker.
- Overall thickness is 1/2 inch.
- Available in three versions:
  - As a single work station mat with beveled borders on all 4 sides; or
  - As a mat with interlocking teeth on one end to serve as an "End" mat.
  - As a mat with interlocking teeth on both ends to serve as a "Center" mat.
- Specify Ends, Centers or Singles when ordering.



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® INDUSTRIAL MATS



End

Center

Single



Black



<b>#545 DIAMOND TOP INTERLOCK™</b>		
<b>Stock Sizes</b>	<b>28" x 31"</b>	<b>36" x 31"</b>
<b>Weight (lbs.)</b>	10	14
Specify Ends, Centers or Singles when ordering.		
Shipping Location: Superior Manufacturing Group - Chicago, IL 60638		





- **Sales Tip:** Select from a series of standard compounds, or mix and match as needed for very specific application requirements.
- **Where to Specify:** Selected compounds should correspond to the requirements of the application. Where wet or dry anti-fatigue matting is needed for very specific applications in harsh environments.


- Available in the following standard compounds: Fire Retardant, Anti-Bacterial, Industrial Chemical/Oil/Grease Resistant (GSII), ESD Conductive, ESD Dissipative, Brake Fluid Resistant, Non Conductive.
- Base rubber compound is 100% Nitrile (except for Brake Fluid Resistant – EPDM) offering the highest resistance to industrial chemicals, oils, and greases.
- Fire retardant matting passes the federal flammability standard DOC FF 1-70/Meets or exceeds class 1 rating as specified in NFPA Life Safety Code 101 (ASTM E648-03/NFPA 253).
- Anti-Bacterial compound meets or exceeds the following test standards: AATCC 147, ASTM G21, ASTM G22.
- (ESD) Dissipative meets IEC61340-4-1, measured resistance Rg 10<sup>6</sup> – 10<sup>9</sup> Ω, Rp 10<sup>6</sup> – 10<sup>9</sup> Ω.
- (ESD) Conductive meets IEC61340-4-1, measured resistance Rg 10<sup>4</sup> – 10<sup>6</sup> Ω, Rp 10<sup>4</sup> – 10<sup>6</sup> Ω.
- Available in solid or perforated versions for drainage.
- Compatible with Patented M.D. Ramp System (100% Nitrile or EPDM) (Available in Black or Yellow – Dissipative/Conductive ramps in Black only).
- Available with aggressive Silicon Carbide grit coating for long-lasting traction (GSII).
- Easy to snap together mats on-site for custom configurations.
- Overall thickness: 3/4”.



**SOLUTIONS™ STANDARD COMPOUNDS**

Product	Top Surface	Stock Size	Weight (lbs.)
650SFR - Fire Retardant	Perforated	3' x 3'	24
656SFR - Fire Retardant	Solid	3' x 3'	29
850SFR - Fire Retardant/GSII	Perforated	3' x 3'	24
856SFR - Fire Retardant/GSII	Solid	3' x 3'	29
660 - (ESD) Dissipative	Perforated	3' x 3'	24
661 - (ESD) Dissipative	Solid	3' x 3'	29
662 - Anti-Bacterial	Perforated	3' x 3'	24
664 - Conductive	Perforated	3' x 3'	24
665 - Conductive	Solid	3' x 3'	29
663 - Brake Fluid Resistant	Perforated	3' x 3'	24
863 - Brake Fluid Resistant/GSII	Solid	3' x 3'	29
667 - Non-Conductive	Solid	3' x 3'	29

Shipping Location: Superior Manufacturing Group - Chicago, IL 60638

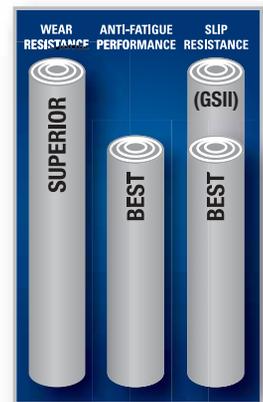

RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® INDUSTRIAL MATS

## Safety/Anti-Fatigue Matting Made to Order

Specially formulated safety matting products that attack the most difficult application requirements:

- Fire Retardant
- Brake Fluid Resistant
- (ESD) Dissipative
- (ESD) Conductive
- Anti-Bacterial
- Industrial Chemical/Oil/Grease Resistant – (GSII)
- Non Conductive

The Solutions™ product family consists of a series of specially formulated rubber compounds designed specifically to attack the most difficult problems found for industrial safety matting. These products are built for applications with extreme requirements that may include the need for fire retardant matting, dissipative/anti-static or conductive properties, anti-bacterial matting, or resistance to harsh industrial chemicals...even Brake fluid!

What really makes Solutions™ unique is the ability to mix and match these compounds to target very specific application needs, for example an Anti-static or conductive mat that is fire retardant, or a brake fluid resistant, fire retardant mat with a grit surface for added traction.

You select the properties needed for your specific application!

Solutions™ by NoTrax is based on the industry leading Cushion-Ease® series available in both solid and perforated versions to allow for drainage of liquids and debris away from the worker platform. In addition, Solutions™ products are also compatible with the patented M.D. Ramp System™ offering easy access on to and off of the mat reducing trip hazards. The ramps are made from the same rubber compounds as the matting offering similar functionality and increasing the life of the ramp.



#730  
#750

# V-GROOVE CORRUGATED RUNNERS™

INDUSTRIAL & COMMERCIAL RUNNERS

- **Sales Tip:** Recommend rubber version (#750) for applications that require a little more traction. Can be used as a liner for maintenance and tool carts.
- **Where to Specify:** Applications where safety and slip protection is needed with minimal anti-fatigue value such as aisle ways, warehouses, vending areas. Low profile matting allows for easy on/off cart traffic.


- Corrugated rib-tooth design improves traction, creates a barrier to cold flooring substrates, and creates a silencing effect over noisy tile.
- Overall thickness is 1/8 inch.
- The #730 V-Groove Corrugated utilizes a vinyl compound.
- The #750 V-Groove Corrugated utilizes a rubber compound.



#730



#750

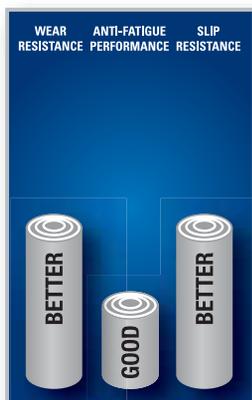

RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® INDUSTRIAL MATS



Black



## #730 & #750 RUNNERS

Roll & Custom Sizes	2' x 105'	3' x 105'	4' x 105'	2' Widths	3' Widths	4' Widths	
<b>Weight (lbs.) #730</b>	147	221	294	.70/sq.ft.	.70/sq.ft.	.70/sq.ft.	
Roll Sizes	2' x 150'	3' x 150'	4' x 150'	2' x 75'	3' x 75'	4' x 75'	6' x 75'
<b>Weight (lbs.) #750</b>	240	350	480	120	175	240	360
Custom Sizes	2' Widths	3' Widths	4' Widths	6' Widths			
<b>Weight (lbs.) #750</b>	.80/sq.ft.	.80/sq.ft.	.80/sq.ft.	.80/sq.ft.			

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459



**ROUND RIB RUNNER™  
DIAMOND PLATE RUNNER**



#735



#737

#735 Detail



- **Sales Tip:** The diamond plate top surface provides additional traction, while the rib design allows for easy clean-up.
- **Where to Specify:** Applications where safety and slip protection is needed with minimal anti-fatigue value such as aisle ways, warehouses, vending areas. Low profile matting allows for easy on/off cart traffic

- The wider spaced rounded rib design of this vinyl runner affords easy clean-up while providing sure footing and floor protection. (#735)
- A durable vinyl construction formed into a rugged diamond top pattern for non-directional anti-slip protection. (#737)
- Overall thickness: (#735) - 1/8 inch
- Overall thickness: (#737) – 5/32 inch



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NOTRAX® INDUSTRIAL MATS



**#735 & #737 RUNNERS**

Roll Sizes & Custom Sizes	2' x 105'	3' x 105'	4' x 105'	2' Widths	3' Widths	4' Widths
Weight (lbs.) #735	145	230	270	.70/sq.ft.	.70/sq.ft.	.70/sq.ft.
Roll Sizes & Custom Sizes	2' x 75'	3' x 75'	4' x 75'	2' Widths	3' Widths	4' Widths
Weight (lbs.) #737	135	200	267	.90/sq.ft.	.90/sq.ft.	.90/sq.ft.


Shipping Location: Superior Manufacturing Group - Moselle, MS 39459



**OPERA™**

- **Sales Tip:** If an entrance is not large enough to accommodate OPERA™, recommend one or more sections as individual mats. (See pages 35, 36 & 37).
- **Where to Specify:** All large, upscale entrances: offices, hotels, professional buildings.

- A NOTRAX® exclusive: the first of its kind 3 mat system in one beautiful mat design.
- The first 3 to 4 feet of the mat (depending on length of mat) features a looped non-absorbent yarn to scrape debris and moisture from foot traffic.
- The second 3 to 4 feet of the mat combines the looped scraper yarns with absorbent Decalon® looped pile to begin the drying function.
- The final 3 to 4 feet of the mat is pure Decalon® looped pile to complete the drying function.
- All yarns are color-coordinated to combine beauty with functionality.
- A dense combination of yarns ensure maximum performance.
- Overall thickness is 3/8 inch.
- A heavyweight vinyl non-slip backing ensures minimum movement.
- Recommended and approved product as a part of the GreenTRAX™ program for "Green Cleaning" environments.

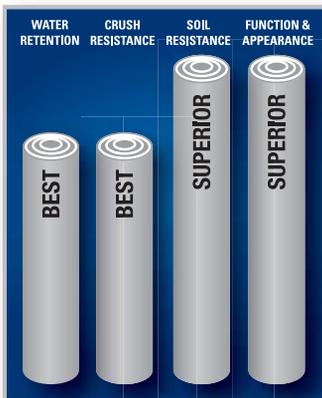

RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® ENTRANCE MATS



**#137 OPERA™**

Stock Sizes	3' x 10'	3' x 12'	4' X 10'	4' X 12'	6' X 10'	6' X 12'
Weight (lbs.)	26	30	33	39	49	58

Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701

Burgundy

Brown


Hunter Green

Charcoal Black

Gray


Blue



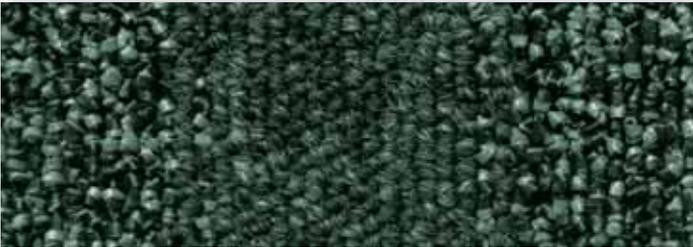

- **Sales Tip:** Color-coordinated to OPERA™ (page 34) or other component mats (pages 36-37).
- **Where to Specify:** All large, upscale entrances: offices, hotels, professional buildings

- Another NOTRAX® exclusive: a combination scraping and drying mat that marries together looped scraper yarns and Decalon® looped pile absorbent yarns.
- The wide performance strip design runs the width of the mat to scrape against traffic as it passes over.
- All yarns are color-coordinated to combine beauty with functionality.
- This mat is the center section of the OPERA™ mat.
- Overall thickness is 3/8 inch.
- A heavyweight vinyl non-slip backing ensures minimum movement.

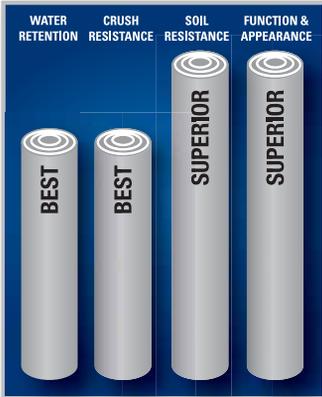

RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® ENTRANCE MATS

<b>#148 INTERMISSION™</b>						
<b>Stock Sizes</b>	<b>2' x 3'</b>	<b>3' x 4'</b>	<b>3' x 5'</b>	<b>3' x 6'</b>	<b>4' x 6'</b>	<b>4' x 8'</b>
<b>Weight (lbs.)</b>	7	13	16	19	24	32
Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701						



# #231




## PRELUDE™

- **Sales Tip:** A total of 15 ft of matting is recommended to prevent 85% of moisture and debris from entering the building.
- **Where to Specify:** Outdoor - Main entranceways, all heavy traffic areas.



- A coarse loop-twisted non-absorbent fiber to scrape heavy debris from foot traffic.
- Aggressive fibers resist crushing while entrapping debris and preventing it from entering the facility.
- This mat is the first section of the OPERA™ mat.
- A heavyweight vinyl non-slip backing ensures minimum movement.
- Can be used as a stand-alone mat, or as the first section (Scraping) of the “Stages” entrance matting system
- Recommended and approved product as a part of the GreenTRAX™ program for “Green Cleaning” environments. (When used as part of the “Stages” system)



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® ENTRANCE MATS



# #146




## ENCORE™

- **Sales Tip:** The Encore™ mat construction is 80% Decalon® drying yarn & 20% Prelude™ scraping yarn. The Intermission™ mat (pg 35) is 50% Decalon® drying yarn & 50% Prelude™ yarn.
- **Where to Specify:** Inside foyer area - Main entranceways, all heavy traffic areas.



- A combination of Prelude™ scraping and looped pile Decalon® drying yarns in a linear pattern.
- Can be used alternatively to the Intermission™ mat.
- A heavyweight vinyl non-slip backing ensures minimum movement.
- Can be used as a stand-alone mat, or as the second section (Scraping & Drying) of the “Stages” entrance matting system
- Recommended and approved product as a part of the GreenTRAX™ program for “Green Cleaning” environments. (When used as part of the “Stages” system)



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® ENTRANCE MATS



# #141




## OVATION™

- **Sales Tip:** Color coordinated with Prelude™ #231, and Encore™ #146, to provide a complete entrance matting solution.
- **Where to Specify:** Indoor - Main entranceways, all heavy traffic areas.




- Generously tufted Decalon® looped pile construction that serves as the finishing, drying and cleaning mat in the coordinated series.
- This mat is the third section of the OPERA™ mat.
- A heavyweight vinyl non-slip backing ensures minimum movement.
- Can be used as a stand-alone mat, or as the third section (Drying) of the “Stages” entrance matting system
- Recommended and approved product as a part of the GreenTRAX™ program for “Green Cleaning” environments. (When used as part of the “Stages” system)



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® ENTRANCE MATS



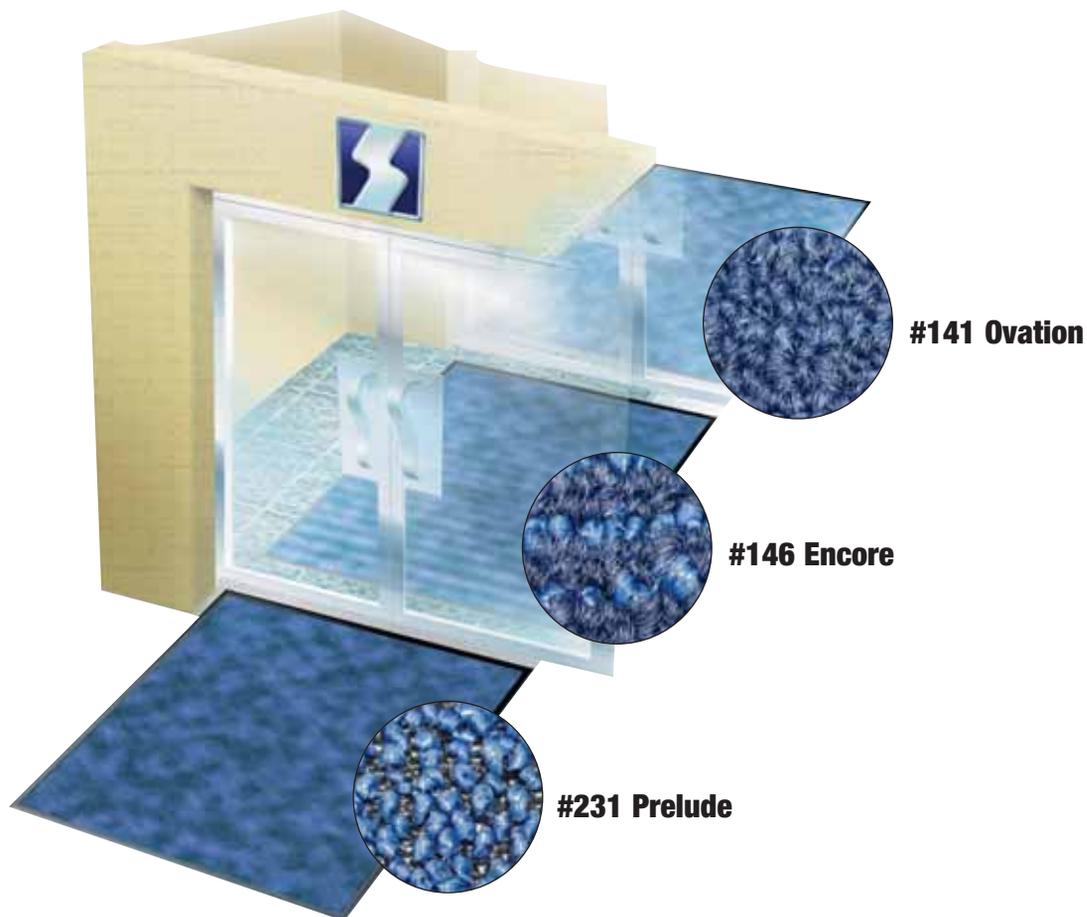

<b>#231 PRELUDE™</b>							
Stock Sizes	2' x 3'	3' x 4'	3' x 5'	3' x 6'	3' x 10'	4' x 6'	4' x 8'
Weight (lbs.)	5	10	12	14	23	19	25
<b>Full Roll &amp; Custom Lengths (Tolerance of -0 / +3" on Custom Lengths)</b>							
Roll Sizes & Custom Sizes	3' x 60'	4' x 60'	6' x 60'	3' Widths	4' Widths	6' Widths	
Weight (lbs.)	144	192	288	.80/sq.ft.	.80/sq.ft.	.80/sq.ft.	
Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701							

<b>#146 ENCORE™</b>							
Stock Sizes	2' x 3'	3' x 4'	3' x 5'	3' x 6'	3' x 10'	4' x 6'	4' x 8'
Weight (lbs.)	5	10	12	14	23	19	25
<b>Full Roll &amp; Custom Lengths (Tolerance of -0 / +3" on Custom Lengths)</b>							
Roll Sizes & Custom Sizes	3' x 60'	4' x 60'	6' x 60'	3' Widths	4' Widths	6' Widths	
Weight (lbs.)	155	205	310	.85/sq.ft.	.85/sq.ft.	.85/sq.ft.	
Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701							

<b>#141 OVATION™</b>							
Stock Sizes	2' x 3'	3' x 4'	3' x 5'	3' x 6'	3' x 10'	4' x 6'	4' x 8'
Weight (lbs.)	5	11	13	15	24	19	25
<b>Full Roll &amp; Custom Lengths (Tolerance of -0 / +3" on Custom Lengths)</b>							
Roll Sizes & Custom Sizes	3' x 60'	4' x 60'	6' x 60'	3' Widths	4' Widths	6' Widths	
Weight (lbs.)	155	205	310	.85/sq.ft.	.85/sq.ft.	.85/sq.ft.	
Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701							

- **Sales Tip:** Indoor use in medium to heavy foot traffic areas
- **Where to Specify:** All large, upscale entrances, reception areas: offices, hotels, professional buildings.

- Combines the classic look of an upscale rug with the function and durability of a high performance entrance mat.
- 24 ounces of twisted nylon fiber per square yard provides superb moisture absorption and retention
- A heavyweight non-slip backing ensures minimum movement.
- Vibrant color designs that won't fade
- 3/8 inch overall thickness



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® ENTRANCE MATS



#170 ORIENTRAX™				
<b>Stock Sizes</b>	<b>3' x 5'</b>	<b>4' x 6'</b>	<b>5' x 8'</b>	<b>4' x 12'</b>
<b>Weight (lbs.)</b>	9	14	24	29
Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701				

Red Cinnamon

Hillcrest Sage


Blue-Gray





- **Sales Tip:** A combination of 4 deniers of yarn make this an extremely long-lasting mat.
- **Where to Specify:** Indoor - Main entranceways; any and all heavy traffic areas.

- A full 38 ounces of needle-punched yarn per square yard provides the highest degree of crush resistance
- 3/8 inch overall thickness makes this heavy-duty mat a long-wearing barrier at the busiest entrances.
- A heavyweight vinyl non-slip backing ensures minimum movement.
- Recommended and approved product as a part of the GreenTRAX™ program for "Green Cleaning" environments.

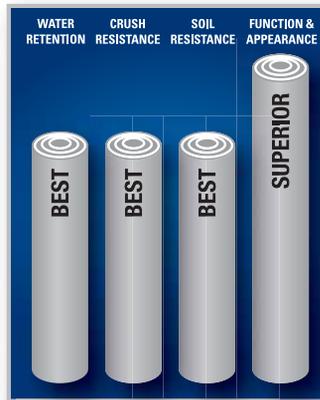

RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® ENTRANCE MATS

**#118 ARROW TRAX™**

<b>Stock Sizes</b>	<b>2' x 3'</b>	<b>3' x 4'</b>	<b>3' x 5'</b>	<b>3' x 6'</b>	<b>3' x 10'</b>	<b>4' x 6'</b>	<b>4' x 8'</b>
<b>Weight (lbs.)</b>	6	11	14	17	28	22	29
<b>Full Roll &amp; Custom Lengths (Tolerance of -0 / +3" on Custom Lengths)</b>							
<b>Roll Sizes &amp; Custom Sizes</b>	<b>3' x 60'</b>	<b>4' x 60'</b>	<b>6' x 60'</b>	<b>3' Widths</b>	<b>4' Widths</b>	<b>6' Widths</b>	
<b>Weight (lbs.)</b>	170	226	340	.94/sq.ft.	.94/sq.ft.	.94/sq.ft.	

Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701

Charcoal

Autumn Brown

Gray

Burgundy


Wine

Hunter Green



- **Sales Tip:** The high-low looped design also serves the purpose of trapping and hiding dirt.
- **Where to Specify:** Indoor - Main entranceways; any and all heavy traffic areas.

- Fashionable high-low looped pile Decalon® captures debris and dries foot traffic while maintaining its attractive appearance.
- A dense 33 ounces of tufted yarn per square yard.
- 3/8 inch overall thickness stands up to the toughest environments.
- A heavyweight vinyl non-slip backing ensures minimum movement.
- Colors coordinate with #139 Boulevard™ for an upscale entrance matting system
- Recommended and approved product as a part of the GreenTRAX™ program for "Green Cleaning" environments.

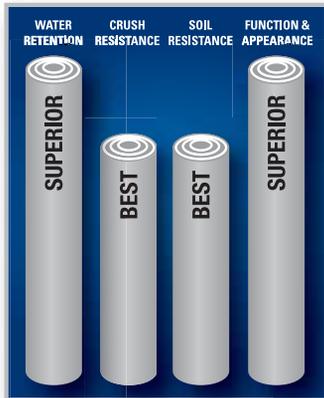

RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® ENTRANCE MATS



#132 ESTES®

<b>Stock Sizes</b>	<b>2' x 3'</b>	<b>3' x 4'</b>	<b>3' x 5'</b>	<b>3' x 6'</b>	<b>3' x 10'</b>	<b>4' x 6'</b>	<b>4' x 8'</b>
<b>Weight (lbs.)</b>	5	11	15	16	29	23	30
<b>Full Roll &amp; Custom Lengths (Tolerance of -0 / +3" on Custom Lengths)</b>							
<b>Roll Sizes &amp; Custom Sizes</b>	<b>3' x 60'</b>	<b>4' x 60'</b>	<b>6' x 60'</b>	<b>3' Widths</b>	<b>4' Widths</b>	<b>6' Widths</b>	
<b>Weight (lbs.)</b>	170	226	340	.92/sq.ft.	.92/sq.ft.	.92/sq.ft.	

Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701

Blue

Charcoal

Brown

Red / Black

Hunter Green


Burgundy





- **Sales Tip:** Color combinations are a fashionable blend of light and dark colors to camouflage debris.
- **Where to Specify:** Inside foyer area - Main entranceways, all heavy traffic areas.

- A combination of Prelude™ scraping and looped pile Decalon® drying yarns in a mini-checked pattern.
- **Can be used alternatively to the Intermission™ mat.**
- Vinyl borders are color-coordinated to match the yarn colors of each mat.
- This dual-fiber, mini-checked pattern effectively traps debris and moisture while retaining its contemporary appearance.

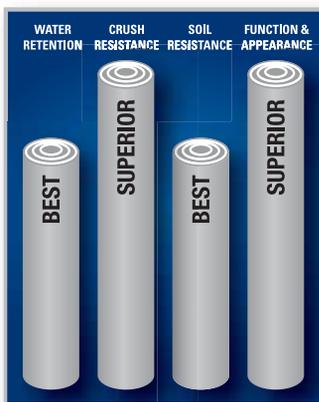

RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® ENTRANCE MATS

#145 PREFERENCE®

<b>Stock Sizes</b>	<b>2' x 3'</b>	<b>3' x 4'</b>	<b>3' x 5'</b>	<b>3' x 6'</b>	<b>3' x 10'</b>	<b>4' x 6'</b>	<b>4' x 8'</b>
<b>Weight (lbs.)</b>	5	11	12	15	26	21	27
<b>Full Roll &amp; Custom Lengths (Tolerance of -0 / +3" on Custom Lengths)</b>							
<b>Roll Sizes &amp; Custom Sizes</b>	<b>3' x 60'</b>	<b>4' x 60'</b>	<b>6' x 60'</b>	<b>3' Widths</b>	<b>4' Widths</b>	<b>6' Widths</b>	
<b>Weight (lbs.)</b>	156.6	208.8	313.2	.87/sq.ft.	.87/sq.ft.	.87/sq.ft.	

Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701

Brown

Navy

Hunter Green

Burgundy

Red / Black


Charcoal

Blue



- **Sales Tip:** Colors correspond with Boulevard (#139) to be used together as an upscale scrape & dry entrance matting system.
- **Where to Specify:** All large, upscale entrances: offices, hotels, professional buildings.

- The high-low looped pile design provides functionality for drying and retaining moisture and debris, while offering an upscale, elegant look.
- A dense 40 ounces of tufted Decalon® yarn per square yard for the ultimate in moisture absorption and crush resistance
- 3/8 inch overall thickness stands up to the heaviest traffic
- A heavyweight vinyl backing available in corresponding colors ensures minimum movement while enhancing the aesthetic appeal of the mat
- Recommended and approved product as a part of the GreenTRAX™ program for “Green Cleaning” environments.

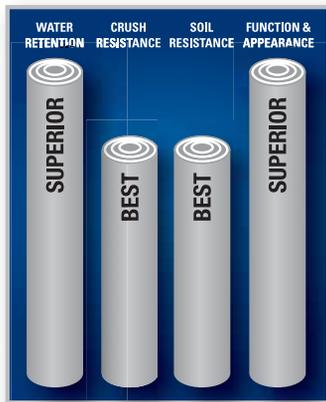

RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® ENTRANCE MATS



#138 UPTOWN™							
<b>Stock Sizes</b>	<b>2' x 3'</b>	<b>3' x 4'</b>	<b>3' x 5'</b>	<b>3' x 6'</b>	<b>3' x 10'</b>	<b>4' x 6'</b>	<b>4' x 8'</b>
<b>Weight (lbs.)</b>	5	10	13	16	26	21	28
<b>Full Rolls &amp; Custom Lengths</b> (tolerance of -0/+3" on custom lengths)							
	<b>3' x 60'</b>	<b>4' x 60'</b>	<b>6' x 60'</b>	<b>3' widths</b>	<b>4' widths</b>	<b>6' widths</b>	
<b>Weight (lbs.)</b>	157	209	313	.87/sq.ft.	.87/sq.ft.	.87/sq.ft.	
Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701							

Navy

Charcoal

Brown

Red / Black

Hunter Green


Burgundy





- **Sales Tip:** The wave pattern runs across the mat and against foot traffic ensuring that shoes come in contact with both drying and scraping yarns.
- **Where to Specify:** All large, upscale entrances with heavy traffic: offices, hotels, professional buildings.

- A unique high-low wave design of alternating Decalon® drying yarn and Decalon® yarn wrapped with tough mono-filament for ultra-aggressive scraping
- A dense 40 ounces of tufted yarn per square yard
- 3/8 inch overall thickness stands up to the heaviest traffic
- A heavyweight vinyl backing available in corresponding colors ensures minimum movement while enhancing the aesthetic appeal of the mat
- Recommended and approved product as a part of the GreenTRAX™ program for "Green Cleaning" environments.

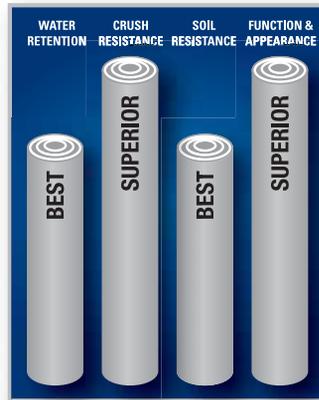


RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® ENTRANCE MATS

<b>#139 BOULEVARD™</b>							
<b>Stock Sizes</b>	<b>2' x 3'</b>	<b>3' x 4'</b>	<b>3' x 5'</b>	<b>3' x 6'</b>	<b>3' x 10'</b>	<b>4' x 6'</b>	<b>4' x 8'</b>
<b>Weight (lbs.)</b>	6	11	14	17	28	22	30
<b>Full Rolls &amp; Custom Lengths</b> (tolerance of -0/+3" on custom lengths)							
	<b>3' x 60'</b>	<b>4' x 60'</b>	<b>6' x 60'</b>	<b>3' widths</b>	<b>4' widths</b>	<b>6' widths</b>	
<b>Weight (lbs.)</b>	157	209	313	.93/sq.ft.	.93/sq.ft.	.93/sq.ft.	
Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701							




- **Sales Tip:** Recommended in upscale environments as the carpet-to-the-edge conceals obtrusive rubber borders.
- **Where to Specify:** Indoor - Main entranceways; any and all heavy traffic areas.

- Molded bubble pattern facilitates scraping and drying, retaining moisture and debris within its patented / invisible Aqua Dam™ border.
- Extremely durable, yet highly fashionable look featuring carpet-to-the-edge to blend with its surroundings.
- **Anti-Microbial** carpet treatment to stop bacteria and germs at the entrance
- 26 ounces of tufted yarn per square yard for increased moisture retention
- 3/8 inch overall thickness.
- Rubber underside features a cleat design which resists mat slippage.
- Available in continuous lengths up to 60 feet
- Recommended and approved product as a part of the GreenTRAX™ program for "Green Cleaning" environments.

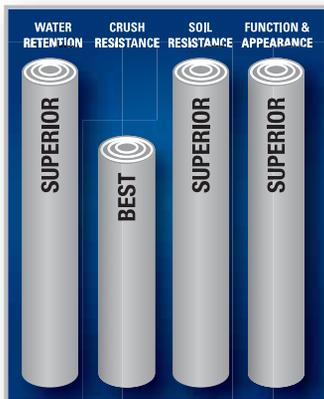

RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® ENTRANCE MATS

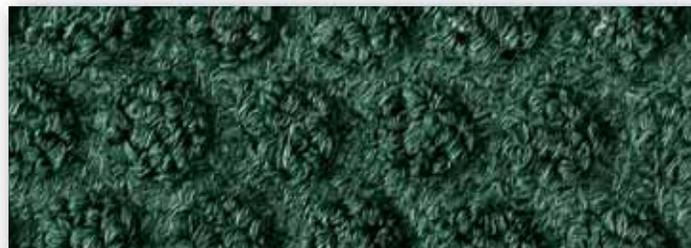

#150 AQUA TRAP®

\*Custom Lengths (Tolerance of -0 / +3")  
\* Must be greater than 5'

Stock Sizes	2' x 3'	3' x 4'	3' x 5'	3' x 10'	4' x 6'	4' x 10'	3' Widths	4' Widths
Weight (lbs.)	7	14	17	35	26	47	1.1/sq.ft.	1.1/sq.ft.

Shipping Location: Superior Manufacturing Group - Chicago, IL 60638

Burgundy

Brown

Slate Blue

Gray

Hunter Green

Charcoal


Red / Black





- **Sales Tip:** Recommended in upscale environments as the carpet-to-the-edge conceals obtrusive rubber borders. Barrier Rib should be placed so that traffic passes across ridges for maximum benefit.
- **Where to Specify:** Indoor - Main entranceways; any and all heavy traffic areas.

- Molded dual-ridge cross-rib pattern (A NoTRAX® exclusive) facilitates scraping and drying, retaining moisture and debris within its patented / invisible Aqua Dam™ border.
- Extremely durable, yet highly fashionable look featuring carpet-to-the-edge to blend with its surroundings.
- Anti-Microbial carpet treatment to stop bacteria and germs at the entrance
- 26 ounces of tufted yarn per square yard for increased moisture retention
- 3/8 inch overall thickness.
- Rubber underside features a cleat design which resists mat slippage.
- Available in continuous lengths up to 60 feet.
- Recommended and approved product as a part of the GreenTRAX™ program for "Green Cleaning" environments.

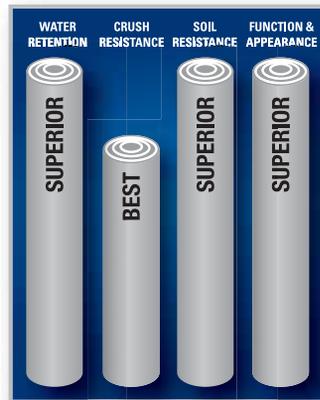

RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® ENTRANCE MATS

**#161 BARRIER RIB™**

**\*Custom Lengths (Tolerance of -0 / +3")**

\* Must be greater than 5'

Stock Sizes	2' x 3'	3' x 4'	3' x 5'	3' x 10'	4' x 6'	4' x 10'	3' Widths	4' Widths
Weight (lbs.)	7	14	17	35	26	47	1.1/sq.ft.	1.1/sq.ft.

Shipping Location: Superior Manufacturing Group - Chicago, IL 60638

Burgundy

Brown

Slate Blue

Gray

Hunter Green

Charcoal Black

Red / Black



- **Sales Tip:** This mat has more carpet per square yard than most look-alike competitive products.
- **Where to Specify:** Indoor – Entrances; Lobbies; all medium traffic areas

- Popular chevron carpet design is attractive and functional as it scrapes debris from shoes regardless of traffic flow.
- 24 ounces of needle-punched yarn per square yard.
- Overall thickness of 5/16 inch to perform in narrow clearance doorways.
- Vinyl backing helps reduce mat movement.



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® ENTRANCE MATS



#105 CHEVRON

<b>Stock Sizes</b>	<b>2' x 3'</b>	<b>3' x 4'</b>	<b>3' x 5'</b>	<b>3' x 6'</b>	<b>3' x 10'</b>	<b>4' x 6'</b>	<b>4' x 8'</b>
<b>Weight (lbs.)</b>	6	11	13	15	24	19	27
<b>Full Roll &amp; Custom Lengths (Tolerance of -0 / +3" on Custom Lengths)</b>							
<b>Roll Sizes &amp; Custom Sizes</b>	<b>3' x 60'</b>	<b>4' x 60'</b>	<b>6' x 60'</b>	<b>3' Widths</b>	<b>4' Widths</b>	<b>6' Widths</b>	
<b>Weight (lbs.)</b>	150	200	300	.83/sq.ft.	.83/sq.ft.	.83/sq.ft.	

Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701

Hunter Green

Brown

Charcoal

Burgundy

Slate Blue





- **Sales Tip:** Dante™ has 33% more carpet than many competitors' "best" Olefin mats.
- **Where to Specify:** Indoor – Entranceways, Lobbies, all medium traffic areas.

- A densely tufted cut-pile Decalon® construction that is a step above the look-alikes and provides much greater moisture retention.
- 24 ounces of tufted yarn per square yard.
- Overall thickness of 3/8 inch to perform in narrow clearance doorways.
- Vinyl backing helps reduce mat movement.



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® ENTRANCE MATS

#131 DANTE™


<b>Stock Sizes</b>	<b>2' x 3'</b>	<b>3' x 4'</b>	<b>3' x 5'</b>	<b>3' x 6'</b>	<b>3' x 10'</b>	<b>4' x 6'</b>	<b>4' x 8'</b>
<b>Weight (lbs.)</b>	5	11	13	16	24	20	25
<b>Full Roll &amp; Custom Lengths (Tolerance of -0 / +3" on Custom Lengths)</b>							
<b>Roll Sizes &amp; Custom Sizes</b>	<b>3' x 60'</b>	<b>4' x 60'</b>	<b>6' x 60'</b>	<b>3' Widths</b>	<b>4' Widths</b>	<b>6' Widths</b>	
<b>Weight (lbs.)</b>	151	202	302	.84/sq.ft.	.84/sq.ft.	.84/sq.ft.	

Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701



- **Sales Tip:** Heritage Rib® has 33% more carpet than many competitors' "best" Rib mats.
- **Where to Specify:** Indoor – Entranceways; Lobbies; all medium traffic areas.

- A heavier-weight double rib high / low design that performs the scraping function of the mat (Note: ribs run length of mat).
- 24 ounces of needle-punched yarn per square yard.
- Overall thickness of 3/8 inch to perform in narrow clearance doorways.
- Vinyl backing helps reduce mat movement.

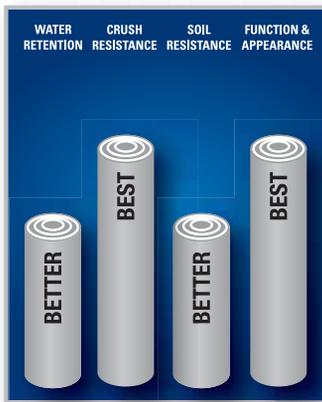

RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® ENTRANCE MATS



<b>#117 HERITAGE RIB®</b>							
<b>Stock Sizes</b>	<b>2' x 3'</b>	<b>3' x 4'</b>	<b>3' x 5'</b>	<b>3' x 6'</b>	<b>3' x 10'</b>	<b>4' x 6'</b>	<b>4' x 8'</b>
<b>Weight (lbs.)</b>	6	11	13	15	25	20	26
<b>Full Roll &amp; Custom Lengths (Tolerance of -0 / +3" on Custom Lengths)</b>							
<b>Roll Sizes &amp; Custom Sizes</b>	<b>3' x 60'</b>	<b>4' x 60'</b>	<b>6' x 60'</b>	<b>3' Widths</b>	<b>4' Widths</b>	<b>6' Widths</b>	
<b>Weight (lbs.)</b>	155	205	310	.85/sq.ft.	.85/sq.ft.	.85/sq.ft.	
Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701							


Red / Black

Charcoal

Brown

Gray

Hunter Green

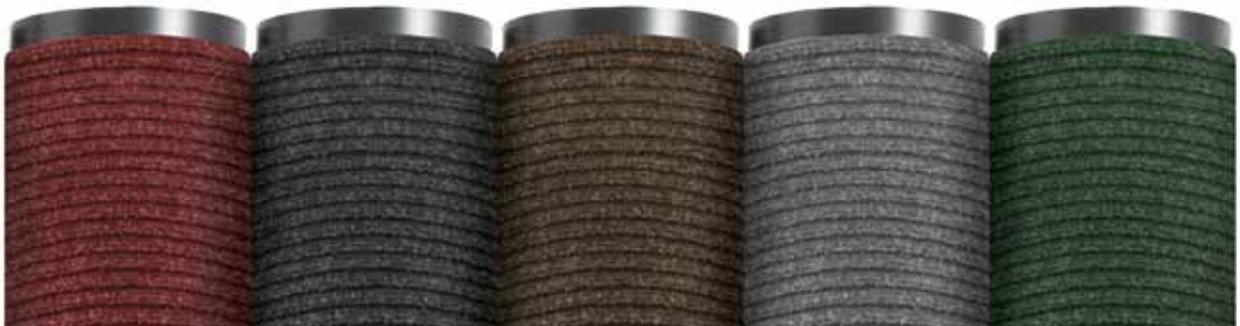



- **Sales Tip:** A European look suitable for a more modern décor.
- **Where to Specify:** Indoor – Entrances, Lobbies, all medium traffic areas.

- A very tightly nibbed loop that entraps debris and hides it for an always elegant appearance.
- 24 ounces of needle-punched yarn per square yard.
- Overall thickness of 1/4 inch to perform in narrow clearance doorways.
- Vinyl backing in corresponding colors helps reduce mat movement.
- Recommended and approved product as a part of the GreenTRAX™ program for "Green Cleaning" environments.



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® ENTRANCE MATS

<b>#136 POLYNIB®</b>							
<b>Stock Sizes</b>	<b>2' x 3'</b>	<b>3' x 4'</b>	<b>3' x 5'</b>	<b>3' x 6'</b>	<b>3' x 10'</b>	<b>4' x 6'</b>	<b>4' x 8'</b>
<b>Weight (lbs.)</b>	5	10	12	13	24	20	26
<b>Full Roll &amp; Custom Lengths (Tolerance of -0 / +3" on Custom Lengths)</b>							
<b>Roll Sizes &amp; Custom Sizes</b>	<b>3' x 60'</b>	<b>4' x 60'</b>	<b>6' x 60'</b>	<b>3' Widths</b>	<b>4' Widths</b>	<b>6' Widths</b>	
<b>Weight (lbs.)</b>	144	192	288	.80/sq.ft.	.80/sq.ft.	.80/sq.ft.	
Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701							



# GUZZLER™

ENTRANCE • "BEST"

- **Sales Tip:** Part of the AquaTRU™ family, Guzzler™ offers true size options for a better value
- **Where to Specify:** The non-directional pattern design is perfect for entranceways, lobbies, and other indoor medium to high traffic areas.

- Raised waffle pattern facilitates the scraping process while the channel design retains moisture and debris
- Raised rubber border on all 4 sides acts as a containment barrier that traps moisture and debris
- Molded rubber cleats on the underside of the mat grip underlying surfaces and minimize mat movement
- 26 ounces of tufted yarn per square yard for increased moisture retention, and easier cleaning
- 3/8" pile height to perform in narrow clearance doorways
- Recommended and approved product as a part of the GreenTRAX™ program for "Green Cleaning" environments.



# PORTRAIT™

- **Sales Tip:** Part of the AquaTRU™ family, Portrait™ offers true size options for a better value
- **Where to Specify:** The non-directional pattern design is perfect for entranceways, lobbies, and other indoor medium to high traffic areas.

- Raised parquet pattern facilitates the scraping process while the channel design retains moisture and debris
- Raised rubber border on all 4 sides acts as a containment barrier that traps moisture and debris
- Molded rubber cleats on the underside of the mat grip underlying surfaces and minimize mat movement
- 26 ounces of tufted yarn per square yard for increased moisture retention, and easier cleaning
- 3/8" pile height to perform in narrow clearance doorways
- Recommended and approved product as a part of the GreenTRAX™ program for "Green Cleaning" environments.



# OPUS™


- **Sales Tip:** Part of the AquaTRU™ family, Opus™ offers true size options for a better value
- **Where to Specify:** The pattern design is intended for areas where foot traffic is random and non-directional

- Raised diamond pattern facilitates the scraping process while the channel design retains moisture and debris
- Raised rubber border on all 4 sides acts as a containment barrier that traps moisture and debris
- Molded rubber cleats on the underside of the mat grip underlying surfaces and minimize mat movement
- 32 ounces of tufted yarn per square yard for increased moisture retention, and easier cleaning
- 3/8" pile height to perform in narrow clearance doorways
- Recommended and approved product as a part of the GreenTRAX™ program for "Green Cleaning" environments.





RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® ENTRANCE MATS

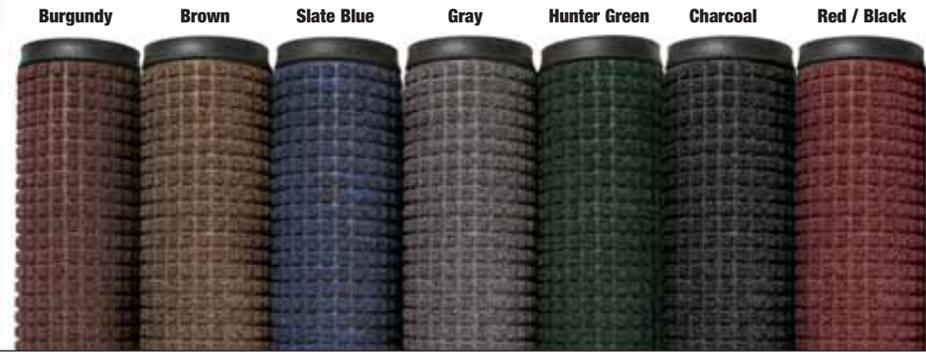

### #166 GUZZLER™

Stock Sizes	2' x 3'	3' x 4'	3' x 5'	3' x 10'	4' x 6'	4' x 10'
Actual Size	24" x 36"	36" x 48"	36" x 60"	36" x 120"	46" x 72"	46" x 120"
Weight (lbs.)	4	8	10	20	16	27

Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701




RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® ENTRANCE MATS



### #167 PORTRAIT™

Stock Sizes	2' x 3'	3' x 4'	3' x 5'	3' x 10'	4' x 6'	4' x 10'
Actual Size	25" x 36"	36" x 47"	36" x 60"	36" x 120"	46" x 72"	46" x 120"
Weight (lbs.)	5	10	12	22	19	30

Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701

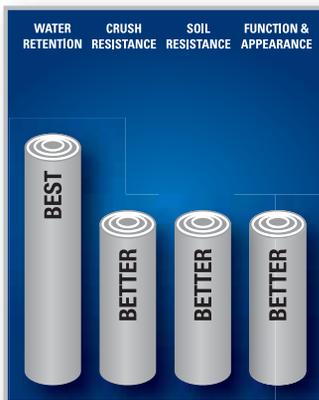

RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® ENTRANCE MATS



### #168 OPUS™

Stock Sizes	2' x 3'	3' x 4'	3' x 5'	3' x 10'	4' x 6'	4' x 10'
Actual Size	24" x 36"	36" x 48"	36" x 60"	36" x 120"	46" x 72"	46" x 120"
Weight (lbs.)	6.4	12.8	16	32	29	48.3


Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701

- **Sales Tip:** Sabre™ Decalon® is comparable to most competitors' "best" Olefin mat.
- **Where to Specify:** Indoor – Entrances, Lobbies, all light to medium traffic areas.

- 19 ounces of tufted cut-pile Decalon® per square yard for a step above the commodity entrance mat.
- Overall thickness of 5/16 inch to perform in narrow clearance doorways.
- Vinyl backing helps reduce mat movement.



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® ENTRANCE MATS

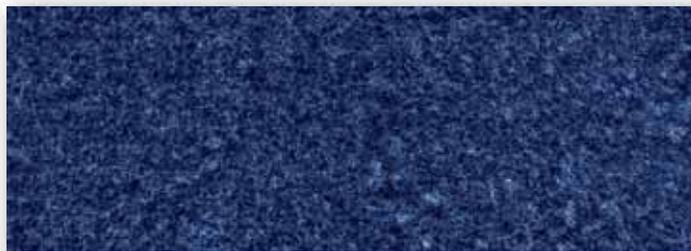

<b>#130 SABRE™</b>							
<b>Stock Sizes</b>	<b>2' x 3'</b>	<b>3' x 4'</b>	<b>3' x 5'</b>	<b>3' x 6'</b>	<b>3' x 10'</b>	<b>4' x 6'</b>	<b>4' x 8'</b>
<b>Weight (lbs.)</b>	5	10	12	14	23	19	24
<b>Full Roll &amp; Custom Lengths (Tolerance of -0 / +3" on Custom Lengths)</b>							
<b>Roll Sizes &amp; Custom Sizes</b>	<b>3' x 60'</b>	<b>4' x 60'</b>	<b>6' x 60'</b>	<b>3' Widths</b>	<b>4' Widths</b>	<b>6' Widths</b>	
<b>Weight (lbs.)</b>	142	190	285	.79/sq.ft.	.79/sq.ft.	.79/sq.ft.	
Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701							

Hunter Green

Red / Black

Burgundy

Slate Blue

Navy

Charcoal

Brown





- **Sales Tip:** Brush Step® is comparable to most competitors' "best" Rib mat.
- **Where to Specify:** Indoor – Entranceways, Lobbies, all light to medium traffic areas

- A lighter-weight double rib high / low design that performs the scraping function of the mat (Note: ribs run length of mat).
- 19 ounces of needle-punched yarn per square yard.
- Overall thickness of 3/8 inch to perform in narrow clearance doorways.
- Vinyl backing helps reduce mat movement.



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® ENTRANCE MATS



**#109 BRUSH STEP®**

Stock Sizes	2' x 3'	3' x 4'	3' x 5'	3' x 6'	3' x 10'	4' x 6'	4' x 8'
Weight (lbs.)	5	10	11	14	21	19	23
<b>Full Roll &amp; Custom Lengths (Tolerance of -0 / +3" on Custom Lengths)</b>							
Roll Sizes & Custom Sizes		3' x 60'	4' x 60'	6' x 60'	3' Widths	4' Widths	6' Widths
Weight (lbs.)		139	185	278	.77/sq.ft.	.77/sq.ft.	.77/sq.ft.

Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701

Slate Blue

Charcoal

Brown

Red / Black

Hunter Green



- **Sales Tip:** Flexible mat can be used in industrial, commercial, and residential applications
- **Where to Specify:** Outdoor entrances, plant doorways, water fountain areas.

- A vinyl-looped construction that traps dirt and moisture while scraping debris.
- 3/8 inch thick and features a thick vinyl backing to resist movement.
- Recommended and approved product as a part of the GreenTRAX™ program for "Green Cleaning" environments.




RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® ENTRANCE MATS



#265 WAYFARER®

<b>Stock Sizes</b>	<b>3' x 5'</b>	<b>4' x 6'</b>	
<b>Weight (lbs.)</b>	12	20	
<b>Description</b>	<b>Compressed borders 4 sides</b>		
<b>Roll &amp; Custom Sizes</b>	<b>3' x 60'</b>	<b>4' x 60'</b>	<b>Custom Lgth.</b>
<b>Weight (lbs.)</b>	150	200	.83/sq.ft.
<b>Description</b>	<b>Vinyl nosing on Short Ends only</b>		

Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701

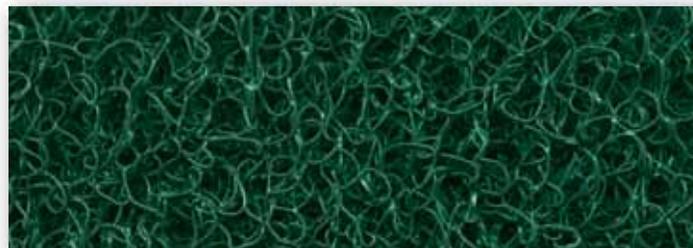

Gray

Black

Brown

Leaf Green

Navy





- **Sales Tip:** Flexible mat can be used in industrial, commercial, and residential applications
- **Where to Specify:** Outdoor entrances, pool areas, recessed wells in foyers.

- A vinyl-looped construction that traps dirt and moisture while scraping debris.
- 1/2 inch thick and has an open-back design for dirt pass-through.
- Recommended and approved product as a part of the GreenTRAX™ program for "Green Cleaning" environments.



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® ENTRANCE MATS



**#266 WAYFARER® CUSTOM**

<b>Stock Sizes</b>	<b>3' x 5'</b>	<b>4' x 6'</b>	
<b>Weight (lbs.)</b>	14	21	
<b>Description</b>	<b>Compressed borders 4 sides</b>		
<b>Roll &amp; Custom Sizes</b>	<b>3' x 60'</b>	<b>4' x 60'</b>	<b>Custom Lgth.</b>
<b>Weight (lbs.)</b>	170	230	.95/sq.ft.
<b>Description</b>	<b>Vinyl nosing on Short Ends only</b>		

Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701

Gray

Black

Brown

Leaf Green

Navy



#340  
#350

# SOIL GUARD®

ENTRANCE • “OUTDOOR”

- **Sales Tip:** Recommend using this mat in conjunction with an interior drying mat.
- **Where to Specify:** Outdoor high traffic areas.

- Heavy-duty, durable rubber matting designed with low profiles for door clearance / cart traffic.
- Raised bar design scrapes debris from shoe traffic.
- Easy to clean – simply hose off.
- Available with silicon carbide grit surface (#350) for additional traction
- Overall thickness is 1/4 inch to minimize tripping hazard
- Recommended and approved product as a part of the GreenTRAX™ program for “Green Cleaning” environments.



WEAR RESISTANCE	CRUSH RESISTANCE	SCRAPING PERFORMANCE
N/A	N/A	BEST

RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® ENTRANCE MATS



#350 Detail



Black

SOIL GUARD®	#340	#350 w/Grit
Stock Sizes	3' x 5'	3' x 5'
Weight (lbs.)	11	11

Shipping Location: Superior Manufacturing Group - Chicago, IL 60638






- **Sales Tip:** Be sure to check door clearance.
- **Where to Specify:** Outdoor entrances of schools, municipal buildings, plant entrances, construction traffic area.


- Constructed of tough, SBR rubber to remain flexible while withstanding extreme cold.
- Thousands of tough, flexible rubber fingers sweep shoes clean while suction cups on underside help to minimize mat movement
- Molded beveled edging on all 4 sides creates a retention dam to trap moisture.
- Overall thickness of 5/8 inch.
- Recommended and approved product as a part of the GreenTRAX™ program for "Green Cleaning" environments.



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® ENTRANCE MATS



**Black**

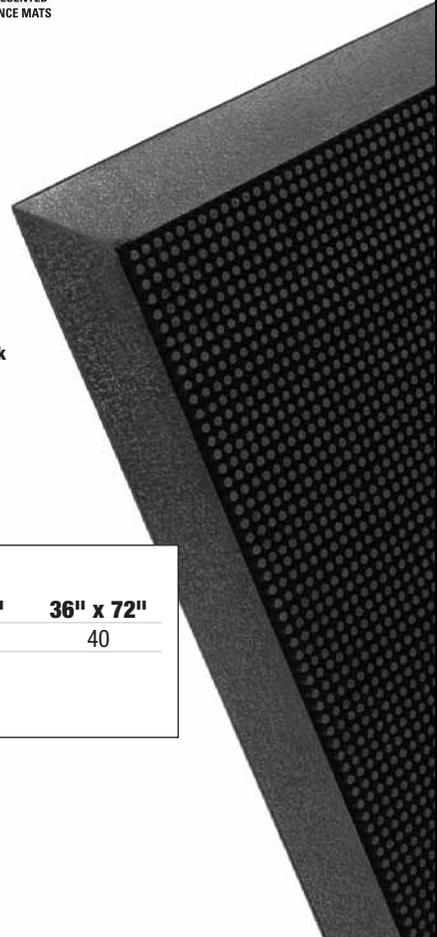

**#345 RUBBER BRUSH™**

<b>Stock Sizes</b>	<b>16" x 24"</b>	<b>24" x 32"</b>	<b>28" x 46"</b>	<b>32" x 39"</b>	<b>36" x 60"</b>	<b>36" x 72"</b>
<b>Weight (lbs.)</b>	5	12	20	24	37	40

Shipping Location: Superior Manufacturing Group - Chicago, IL 60638




#323  
#325

ENTRANCE • "FOYER"

# SMART STEP™ with ARROW TRAX™ and SMART STEP™ with Decalon®

- **Sales Tip:** For surface installations, remember to include the optional beveled edging.
- **Where to Specify:** Foyer entrances of Stores/Shopping Malls, Hospitals, and Office Buildings.

- A NOTRAX® exclusive designed to provide years of service in the busiest of foyers.
- Alternating rows of ribbed vinyl and carpet strips scrape and dry the foot traffic of hundreds of visitors per day.
- The #323 version features 38 ounce per square yard Arrow Trax™ carpet matting strips for excellent scraping and drying.
- The #325 version features cut-pile Decalon® carpet matting strips for effective moisture retention.
- Can be placed within a foyer recess - depth of 3/8" to 1/2" – allow 9/16" door clearance.
- Can also be placed directly on floor – allow 9/16" door clearance.
- Ribbed vinyl sections can be perforated to facilitate drainage (recommended for recess areas only)
- Overall thickness: #323 is 9/16" and #325 is 1/2"
- Mat is fully assembled at the factory to your custom size specification.
- Orders must be accompanied by a sketch clearly indicating width, length and direction of traffic flow.
- When you measure, remember: Proper placement is for the strips to run width of mat.
- All mats larger than 12 feet by 22 feet will be made in 2 or more sections

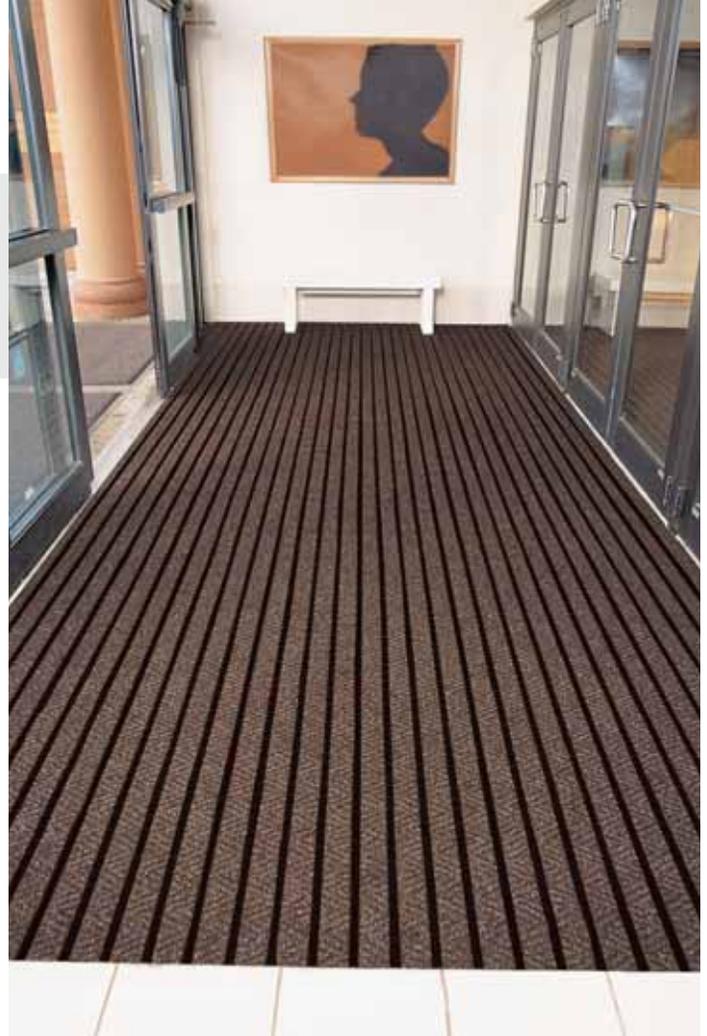

#323 Detail



#325 Detail



## SMART STEP™

### #323

Description	w/o perforations	w/ perforations
<b>Weight (lbs.)</b>	2.33/sq.ft.	2.33/sq.ft.

### #325

Description	w/o perforations	w/ perforations
<b>Weight (lbs.)</b>	2.29/sq.ft.	2.29/sq.ft.

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459



RESULTS FROM INDEPENDENT TEST LABS & PRESENTED AS COMPARISONS TO OTHER NOTRAX® ENTRANCE MATS





- **Sales Tip:** Recommend for any oversized entrance where multiple mats are not desirable.
- **Where to Specify:** Entrances of Stores/Shopping Malls, Hospitals, Office Buildings.

- Crafted specifically for oversized entrances & foyers where one piece of matting is required versus multiple individual mats.
- 45 ounces per square yard of berber needlepunch
- Heat-sealed borders are standard.
- Optional beveled edge borders are available for a more gradual transition
- Beveled edge borders available in complimentary colors: Black, Gray, Burgundy, Green, Brown
- Rubber backing is textured on the underside to help minimize mat movement.
- Overall thickness of 7/16 inch—be sure to check door clearance.



**Beveled Edging**



**Heat Sealed Edging**



**#370 MASTER TRAX™**

**Custom**

**Weight (lbs.)** .75/sq.ft.  
(Specify Standard or Square Edge)

Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701

**Charcoal**



**Brown**



**Burgundy**



**Hunter Green**



**Gray**



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® ENTRANCE MATS




# TUFTED LOGO MATS


ENTRANCE • "LOGO"

- **Sales Tip:** Yields exceptional performance in heavier traffic areas
- **Where to Specify:** Prominent entrances of light to heavy traffic where a long-lasting image is critical.


- Promote the business name, address, logo or motto with fully tufted Logo Mats
- The design and mat itself are of one integral construction ensuring years of durability
- Made with 52 ounces of solution-dyed nylon yarn that resists fading and crushing.
- Rubber backing is cleated to resist movement and withstand temperature extremes.
- A broad color range of 32 choices is available.

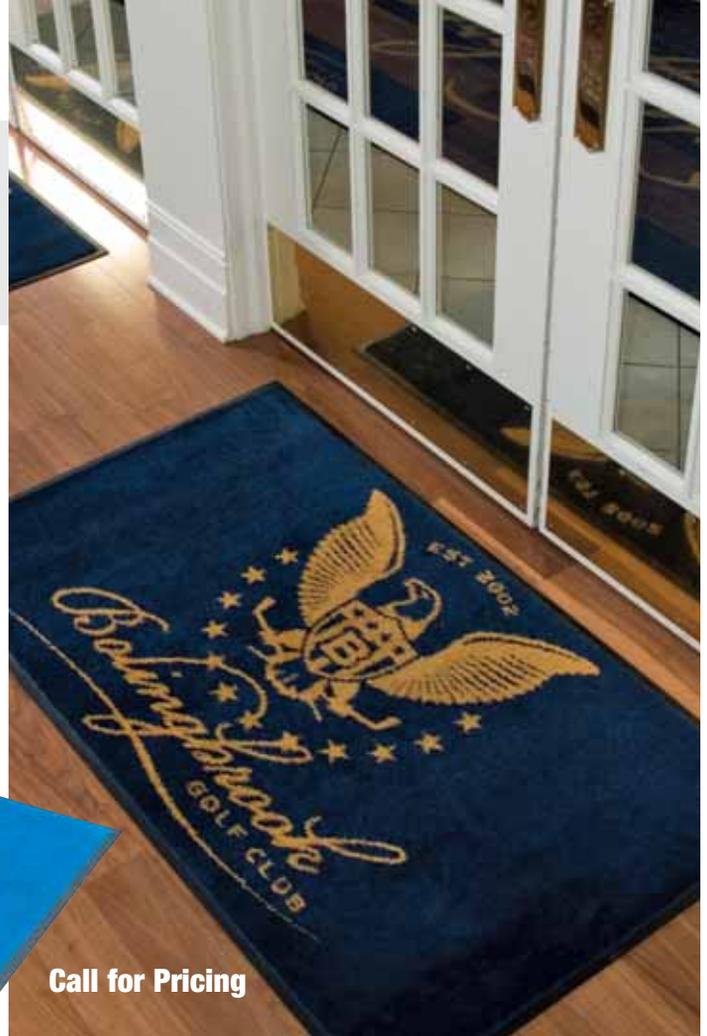

Call for Pricing

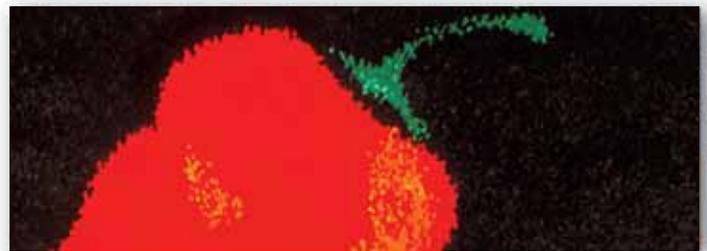

Adobe Pantone 181C	Antique White Pantone 726C	Bay Blue Pantone 293C	Blue Rose Pantone 506C	Bronze Pantone 174C	Camel Pantone 4635C	Cinnamon Pantone 1545C	Citrine Pantone 1215C
Clear Red Pantone 187C	Deeper Navy Pantone 2767C	Dove Cool Gray 4C	English Blue Pantone 5415C	Fawn Pantone 4755C	Gold Pantone 131C	Grape Pantone 2622C	Gray Metal Cool Gray 9C
Hunter Green Pantone 3308C	Magenta Pantone 249C	Moss Agate Pantone 346C	Mt. Olive Green Pantone 5743C	Orange Pantone 1585C	Orchid Pantone 5285C	Pink Iris Pantone 694C	Raven Black Process Black C
Regal Blue Pantone 647C	Shadow Mist Pantone 431C	Smokey Mount Pantone 433C	Soft Pebble White	Summer Leaf Pantone 334C	Sunflower Pantone 122C	True Burgundy Pantone 195C	Turquoise Pantone 3145C

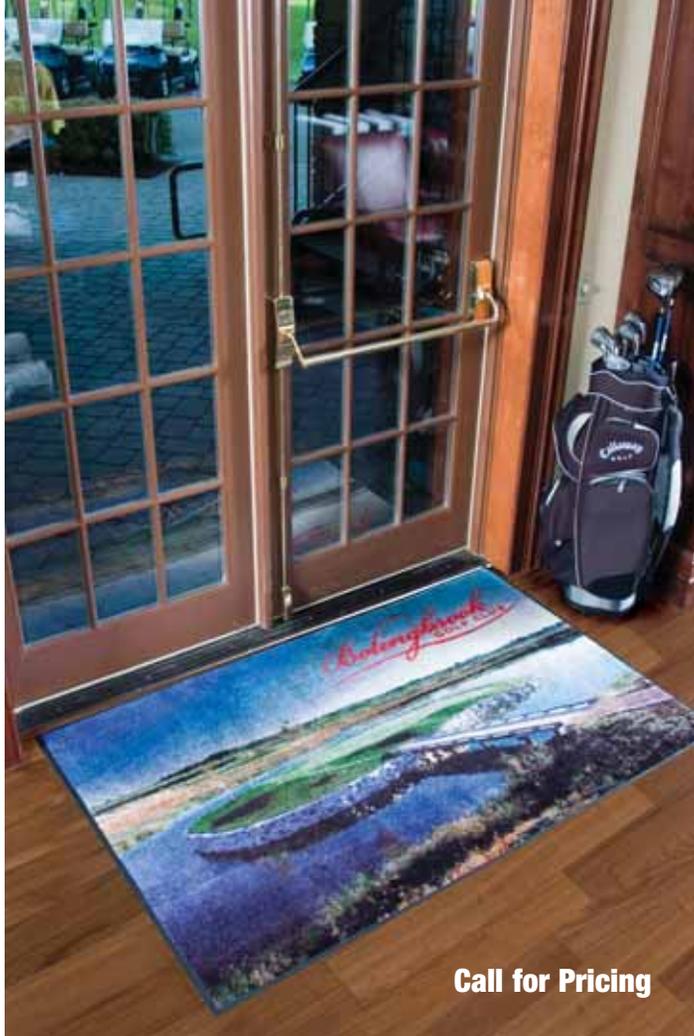

Call for Pricing



Standard Tufted  
8th Gauge  
64 dpi



BrilliantStep™  
20th Gauge  
400 dpi

## BRILLIANTSTEP™ IMAGE MATTING

#190


ENTRANCE • "LOGO"

- **Sales Tip:** Truly multi-functional entrance mat that stops dirt and debris while improving aesthetic appeal and promoting business, product, or message.
- **Where to Specify:** Prominent entrances of light to heavy traffic where a long-lasting image is critical – Retail, restaurants, hotels, corporate, schools, etc...


- Patented dye-injection process offers photo-realistic quality equivalent to 400 dpi resolution
- Color palette of 189 base colors with blending and shading to achieve over 700 shades of color
- Variety of background designs and borders to enhance your logo and camouflage dirt and stains
- Anti-slip backing to minimize mat movement
- 24 ozs of cut-pile nylon provides increased moisture retention



### Custom Border Designs

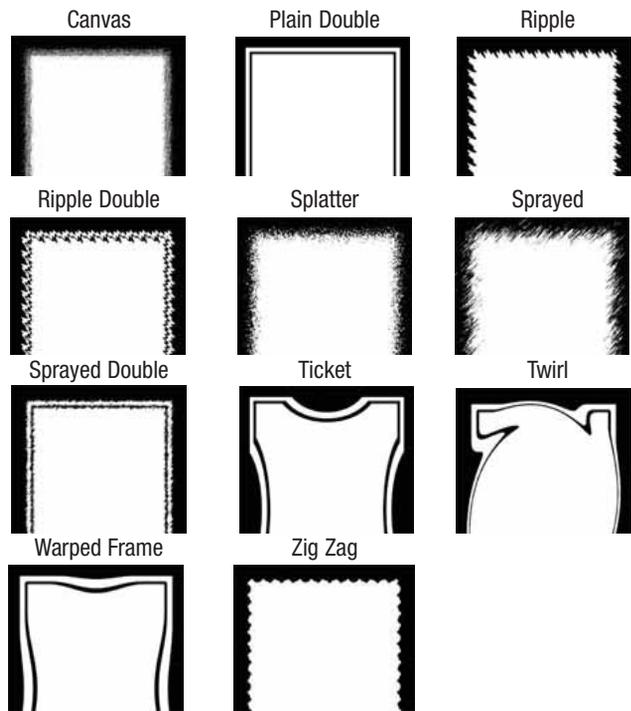

### Custom Background Designs

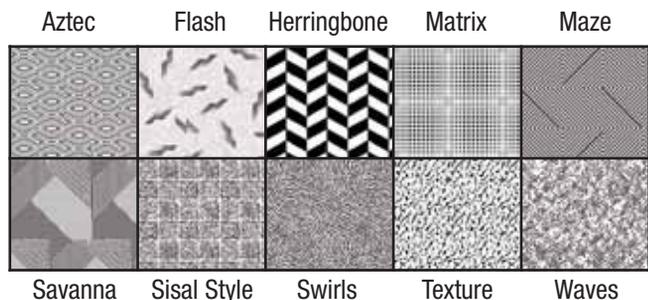

## #083 STANDARD BEVELED NOSING

- Apply to carpet matting that is cut onsite for a factory-finished appearance.
- Nosing lip is adhered underneath mat and produces the 1" "factory-look" beveled border.
- Overall thickness of 1/8 inch.
- #086 Adhesive - 16 ounce can with brush top applicator; or 5 ounce tube
- #096 Roller – Application roller to press nosing strip into adhesive on mat.
- #083K Nosing Kit – includes 25 feet of Nosing, 5 ounce tube of adhesive and 1 application roller.




## #084 HEAVY DUTY BEVELED NOSING

- Apply to carpet matting that is cut onsite and requires a stronger than average border.
- Nosing lip is adhered underneath mat and produces a 1 1/2" beveled border.
- Overall thickness of 1/4 inch.
- #086 Adhesive - 16 ounce can with brush top applicator; or 5 ounce tube
- #096 Roller – Application roller to press nosing strip into adhesive on mat.
- #039K Nosing Kit – includes 25 feet of Nosing, 5 ounce tube of adhesive and 1 application roller.



#084 Heavy Duty Beveled Nosing

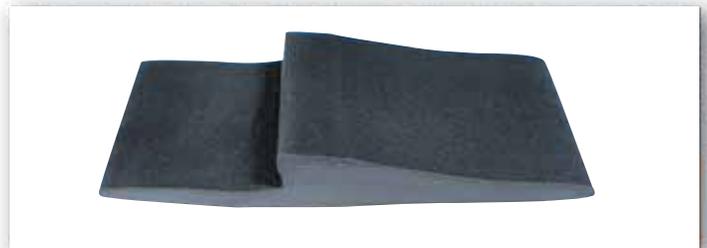

### #083 STANDARD BEVELED NOSING

**Black Nosing:**

Size	150 ft. Rolls	Custom Lgth.
Weight (lbs.)	18	.18/lin.ft

**Brown, Blue, Burgundy, Green Nosing:**

Size	150 ft. Rolls	Custom Lgth.
Weight (lbs.)	18	.12/lin.ft

Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701

### #083K STANDARD BEVELED NOSING KIT

**Description of Kit:** 25 ft. of #083 Nosing, 5 oz. Adhesive\*, & Application Roller

**Black Nosing:**

Weight (lbs.)	4
---------------	---

**Brown, Blue, Burgundy, Green Nosing**

Weight (lbs.)	4
---------------	---

Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701

\*Note: A Hazardous Material Charge may be imposed by the freight carrier

### #084 HEAVY DUTY BEVELED NOSING

Roll Sizes & Custom Sizes	100 ft. Rolls	Custom Lgth.
Weight (lbs.)	18	.18/lin.ft

Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701

### #039K HEAVY-DUTY BEVELED NOSING KIT

**Description of Kit:** 25 ft. of #084 Nosing, 5 oz. Adhesive\*, & Application Roller

Weight (lbs.)	6
---------------	---

Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701

\*Note: A Hazardous Material Charge may be imposed by the freight carrier

# VELCRO® CARPET ANCHOR SYSTEM

## #085 / #086 / #088 / #096

- Individual strips of Velcro® (male side) can be affixed to underside of vinyl-backed mat to "anchor" mat to looped pile carpeting.
- Be certain to thoroughly clean floor and underside of mat before applying.
- Recommend that the strips are affixed across width of mat at 3 foot intervals.
- #086 Adhesive - 16 ounce can with brush top applicator; or 5 ounce tube
- #096 Roller – Application roller to press Velcro strip into adhesive onto mat.
- #088 Velcro Kit – includes 15 feet of Velcro, 5 ounce tube of adhesive and 1 application roller.

*Velcro® is a registered trademark of Velcro USA, Inc.*

### #090 MAT HOLD

- Rubberized mesh pad adheres to floor and underside of vinylbacked carpet mat.
- Will not stain carpeting or floors.
- Be certain to thoroughly clean floor and underside of mat before applying.
- Recommend that mesh pad is cut 6 inches narrower than mat on all 4 sides.



#096



### #096 APPLICATION ROLLER

**Weight** 3 ounces

Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701

### #085 VELCRO® CARPET ANCHOR

Roll Sizes & Custom Sizes	75 ft. Rolls	Custom Lgth.
<b>Weight (lbs.)</b>	1	.15oz/lin.ft

Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701

### #090 MAT HOLD

Roll Sizes & Custom Sizes	2' x 100'	3' x 100'	Custom Lgth.
<b>Weight</b>	5 ounces	5 ounces	

Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701

### #086 VELCRO® ADHESIVE

Size	16 oz. Can	5 oz. Tube
<b>Weight</b>	1 pound	5 ounces

Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701  
 \*Note: A Hazardous Material Charge may be imposed by the freight carrier

### #088K VELCRO® CARPET ANCHOR KIT


<b>Description of Kit:</b>	15 ft. of #085 Velcro®, 5 oz. Adhesive*, & App. Roller
<b>Weight (lbs.)</b>	2

Shipping Location: Superior Manufacturing Group - Calhoun, GA 30701  
 \*Note: A Hazardous Material Charge may be imposed by the freight carrier

- **Sales Tip:** Optional connector strip allows for attaching multiple mats. Optional beveled borders available for easy access onto mat.
- **Where to Specify:** Food prep or bar areas where workers stand for long periods of time.
- Extra heavy-duty perforated mat designed to provide maximum comfort while standing for long periods of time. A large-hole drainage system allows food and liquid spillage to channel away from the worker platform.
- **Raised blades on top surface help minimize slips yet facilitate pivoting from repetitive movement.**
- Available in 2 versions: (1) Black mat which is grease resistant and carries a 1-year warranty. (2) Red mat with extra nitrile content is grease-proof and carries a 5-year warranty.
- Overall thickness is 7/8 inch.



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® FOOD SERVICE MATS

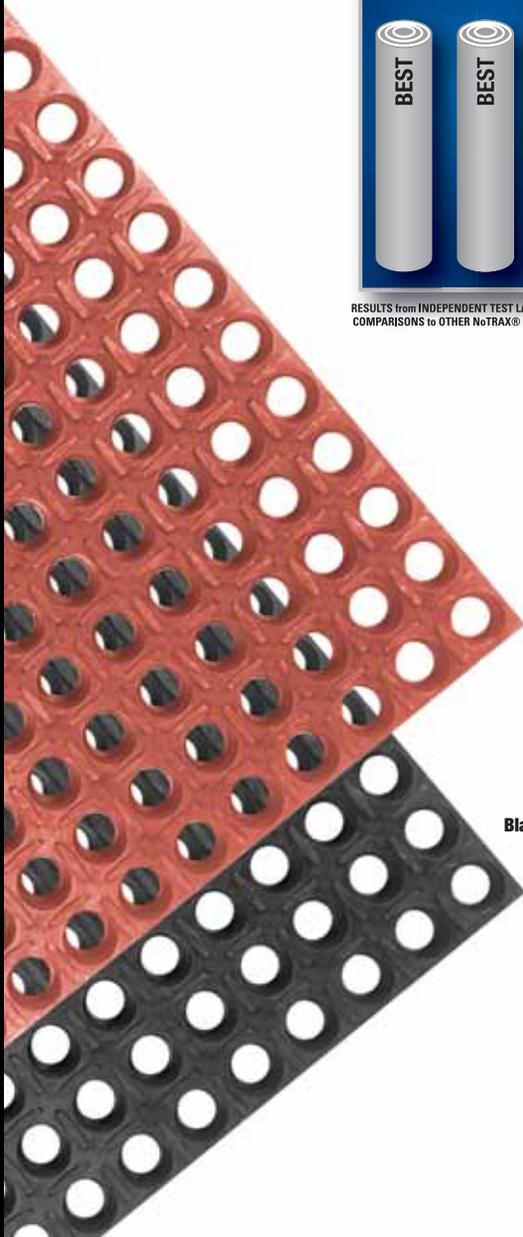

Red


Black

#543 CUSHION-TRED™

Size/Color	2' x 3' - Black	3' x 3' - Black	3' x 5' - Black
Weight (lbs.)	19	29	49
Size/Color	2' x 3' - Red	3' x 3' - Red	3' x 5' - Red
Weight (lbs.)	19	29	49
Description	<b>M.D. Ramps</b>	<b>Connectors</b>	
Color	(Black or Red)	(Black only)	
Size	up to 5' ea	1' length	
Weight (lbs.)	.7/lin.ft.	.33	

Shipping Location: Superior Manufacturing Group - Chicago, IL 60638



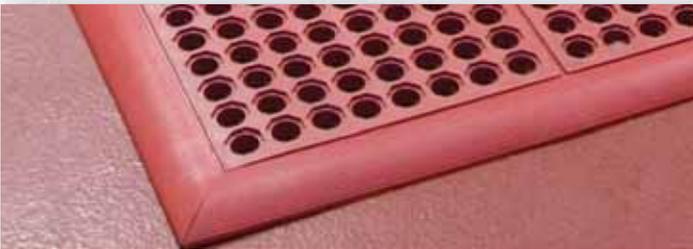


- **Sales Tip:** Easy to make custom configurations on-site by utilizing the patent-pending #551 MD Ramp System™. (See page 24 for details.)
- **Where to Specify:** Food prep areas where workers stand for long periods of time.

- A resilient rubber compound and unique support design offers exceptional fatigue relief. Large hole drainage design keeps moisture and debris free from worker platform.
- Optional borders available for trip-resistant platform.
- Available in 2 versions: (1) Black mat which is grease resistant and carries a 1-year warranty. (2) Red mat with extra nitrile content is grease-proof and carries a 3-year warranty.
- Overall thickness is 3/4 inch.



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® FOOD SERVICE MATS

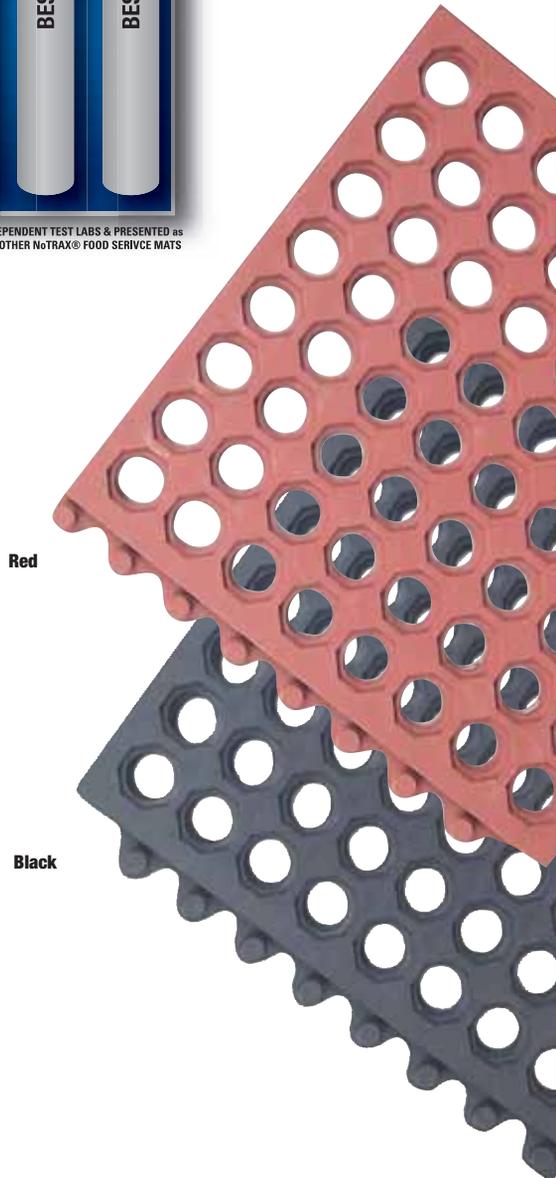

<b>#550 CUSHION-EASE®</b>			
<b>Size/Color</b>	<b>3' x 3' - Black</b>	<b>3' x 5' - Black</b>	
<b>Weight (lbs.)</b>	24	39	
<b>Size/Color</b>	<b>3' x 3' - Red</b>	<b>3' x 5' - Red</b>	
<b>Weight (lbs.)</b>	24	39	
Shipping Location: Superior Manufacturing Group Chicago, IL 60638			





- **Sales Tip:** Great for stand-alone mat environments. Multiple mats cannot be connected.
- **Where to Specify:** Food prep areas where workers move on and off mats frequently.

- A solid rubber compound featuring a large-hole drainage system and a textured top surface which facilitates drainage and minimizes slippage.
- Broad-beveled borders on all 4 sides are an integral molded part of the mat.
- Available in 2 versions: (1) Black mat which is grease resistant and carries a 1-year warranty. (2) Red mat with extra nitrile content is grease-proof and carries a 3-year warranty.
- Overall thickness is 5/8 inch.



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® FOOD SERVICE MATS

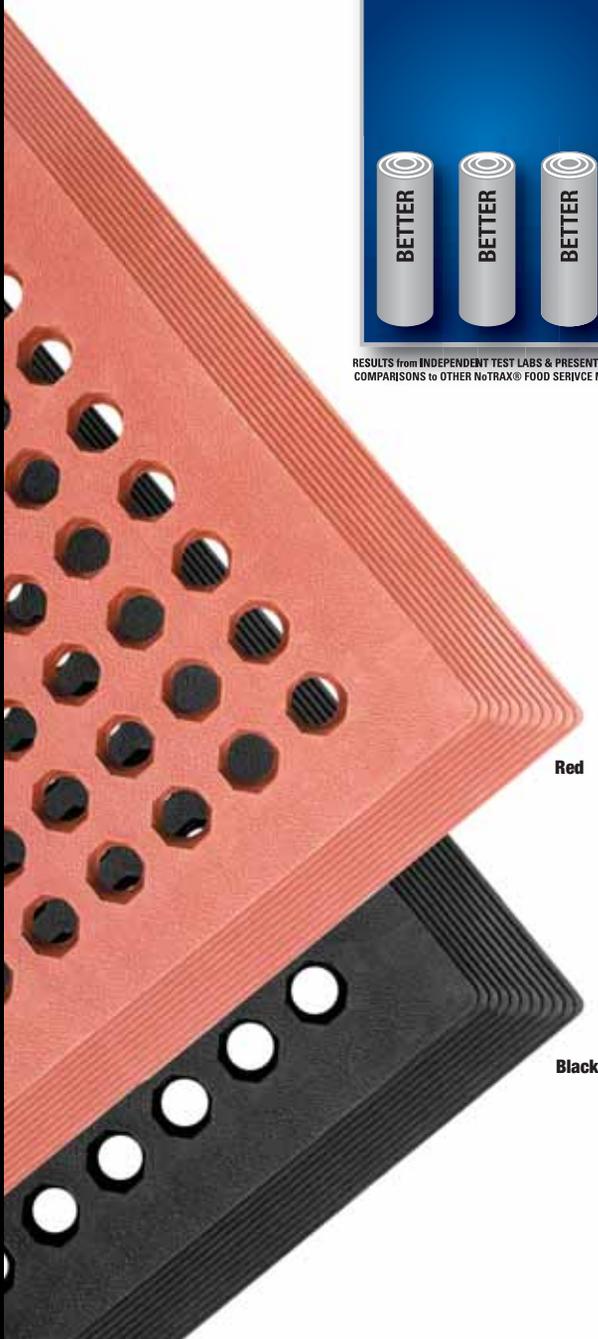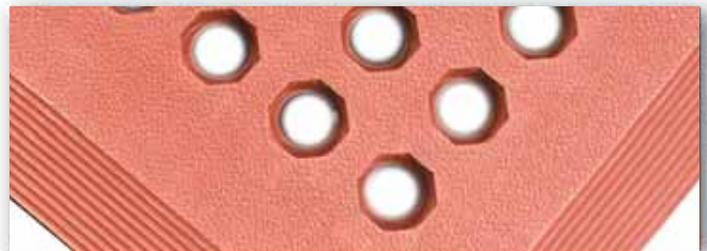

**#544 COMFORT ZONE™**

<b>Size/Color</b>	<b>3' x 5' - Black</b>	<b>3' x 5' - Red</b>
<b>Weight (lbs.)</b>	31	31

Shipping Location: Superior Manufacturing Group - Chicago, IL 60638



#755

**NIRU® VERSA RUNNER®**  
**NIRU® KNOB-TOP RUNNER®**

#755  
 #758

FOOD SERVICE

- **Sales Tip:** Ideal for long runs where low profile mats are needed for cart traffic
- **Where to Specify:** Wet or dry environments that require high traction and drainage capability.

• Both mats are made of a durable grease-proof construction featuring 100% nitrile compounding in a continuous long length.


- #755 VERSA RUNNER® is 3/8 inch thick with slotted perforations for drainage.
- Ribbed underside enhances anti-fatigue value and channels liquid away from the mat.
- #758 KNOB-TOP RUNNER® is 1/4 inch thick, has a solid top surface and allows for cart traffic to easily pass over the mat.



#758



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® INDUSTRIAL MATS

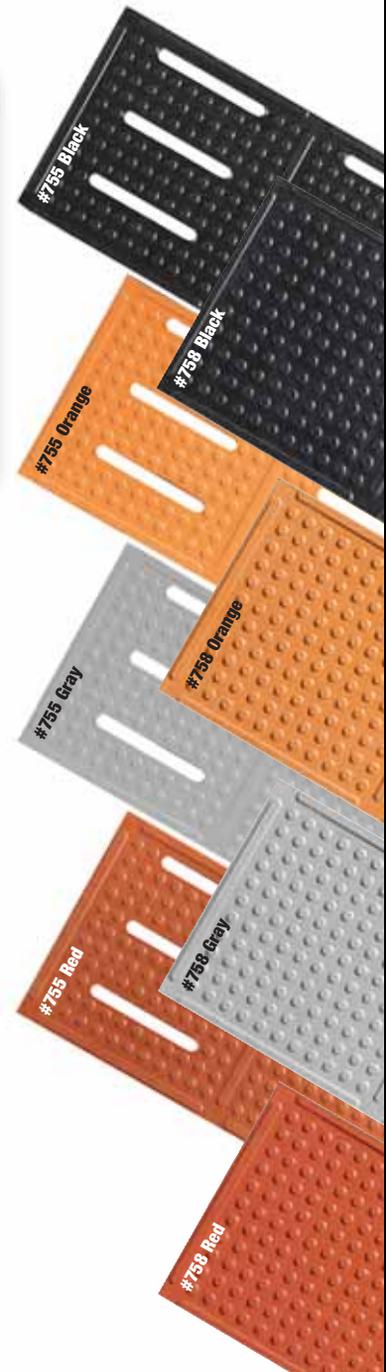

#755 NIRU® VERSA RUNNER®			
<b>Roll Sizes</b>	<b>2' x 60'</b>	<b>3' x 60'</b>	<b>4' x 60'</b>
<b>Weight (lbs.)</b>	180	270	360
<b>Custom Sizes</b>	<b>2' Widths</b>	<b>3' Widths</b>	<b>4' Widths</b>
<b>Weight (lbs.)</b>	1.5/sq.ft.	1.5/sq.ft.	1.5/sq.ft.

Shipping Location Superior Manufacturing Group - Chicago, IL 60638

#758 NIRU® KNOB-TOP RUNNER®			
<b>Roll Sizes</b>	<b>2' x 60'</b>	<b>3' x 60'</b>	<b>4' x 60'</b>
<b>Weight (lbs.)</b>	150	225	300
<b>Custom Sizes</b>	<b>2' Widths</b>	<b>3' Widths</b>	<b>4' Widths</b>
<b>Weight (lbs.)</b>	1.25/sq.ft.	1.25/sq.ft.	1.25/sq.ft.

Shipping Location: Superior Manufacturing Group - Chicago, IL 60638





- **Sales Tip:** Tiles can be easily reconfigured to adapt to changing environments.
- **Where to Specify:** Locker rooms, shower areas, spa areas, restaurant shelving, bar areas

- Light-weight, modular, drainage design allows for use as shelf liners in food prep and bar areas
- Raised diamonds on top surface facilitates drainage and aids traction.
- Beveled Ramps and Corners complete the installation and minimize trip hazards.
- Overall thickness is 9/16 inch.



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER MoTRAX® SPECIALTY MATS

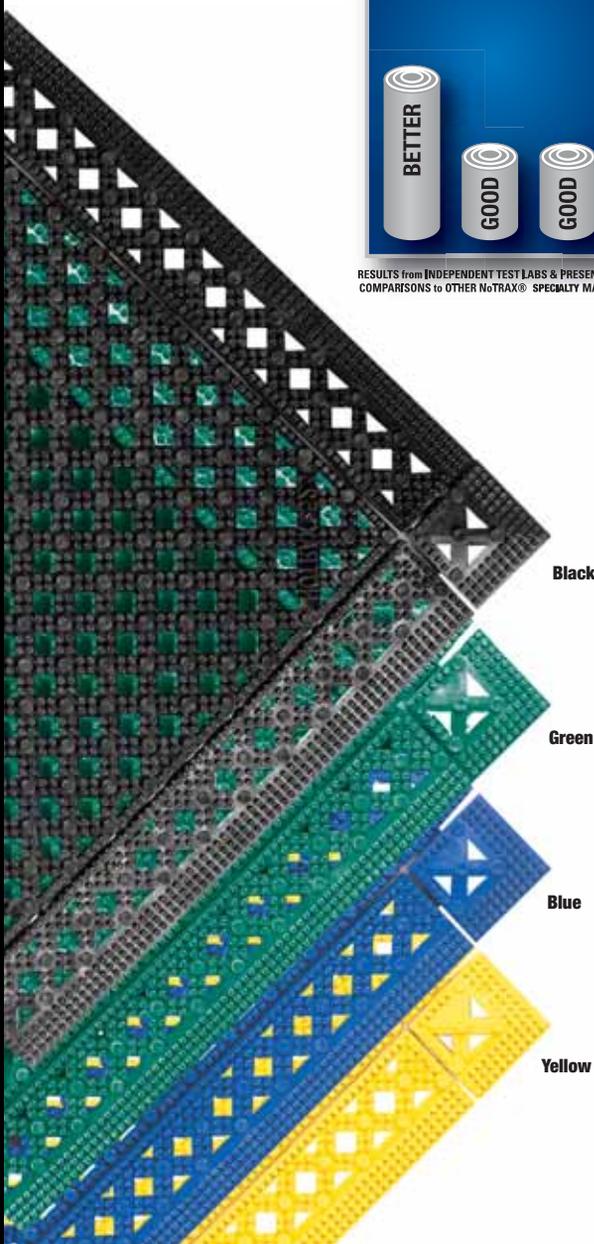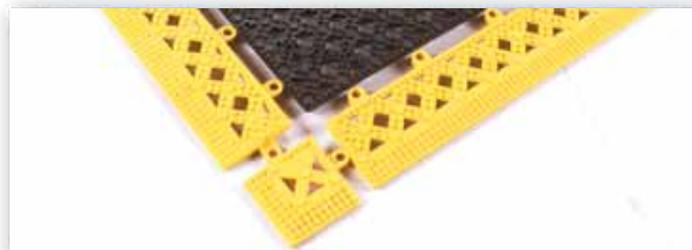

Black

Green


Blue

Yellow

#523 MODULAR LOK-TYLE™

Stock Sizes	12" x 12" Tile	2" x 12" Ramp	2" x 2" Corner
Weight (lbs.)	1	0.25	0.04


Shipping Location: Superior Manufacturing Group - Moselle, MS 39459






- **Sales Tip:** A bit more aggressive top surface than #523, Safety Grid™ is still comfortable for bare feet.
- **Where to Specify:** Locker rooms, shower areas, pool areas.

- Duckboard design constructed of resilient vinyl ensures years of use.
- Creates an elevated platform keeping traffic away from moisture.
- **Top of rails features a saw-tooth design to minimize slippage.**
- Overall thickness is 1/2 inch.

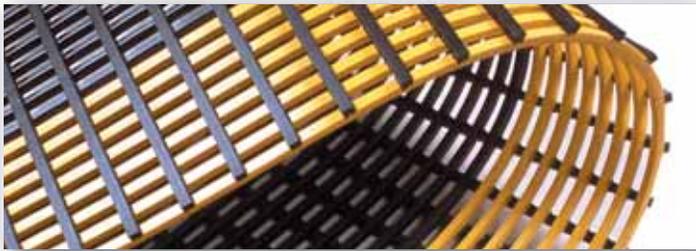

RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® SPECIALTY MATS

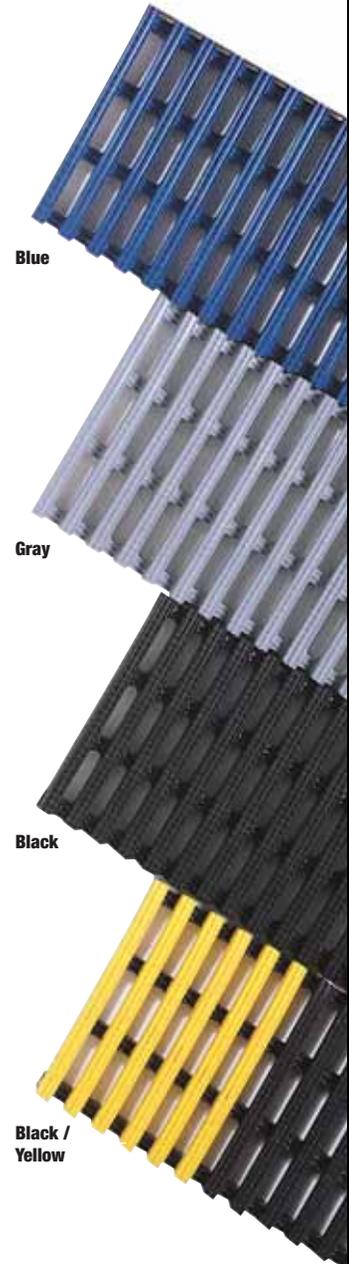

**#531 SAFETY GRID™**

<b>Roll Sizes</b>	<b>2' x 40'</b>	<b>3' x 40'</b>	<b>4' x 40'</b>
<b>Weight (lbs.)</b>	102	151	205
<b>Custom Sizes</b>	<b>2' Widths</b>	<b>3' Widths</b>	<b>4' Widths</b>
<b>Weight (lbs.)</b>	1.27/sq.ft.	1.27/sq.ft.	1.27/sq.ft.

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459



#035

## SKATE-SPIKE RESISTANT MATTING™



- **Sales Tip:** To minimize mat movement, be certain floor is free of dirt particles before laying mat.
- **Where to Specify:** Skating rinks, locker rooms, gymnasiums. Temporary or permanent placement over expensive carpet in heavy traffic areas.

- A durable vinyl linear ribbed top surface minimizes damage to floors from spikes /skates.
- Overall thickness is 1/4 inch.



#045

## WEIGHT ROOM MATTING



- **Sales Tip:** The sheer weight of the mats (130 pounds for the 3/4") helps keep the mats in place.
- **Where to Specify:** Weight rooms, health clubs, gymnasiums.

- Indestructible rubber slab matting with textured top surface protects floors from weight lifting equipment.

- **Overall thickness:** Available in 1/2 inch or 3/4 inch

\* Not intended for wall-to-wall applications.



#769

## CLEAR TRAX™



- **Sales Tip:** Recommend for use only on looped pile carpeting
- **Where to Specify:** Temporary or permanent placement over expensive carpet in heavy traffic areas.

- Heavy duty clear PVC ribbed top runner protects carpeting from the debris of foot traffic.

- **Mini-spiked underside** clings to carpet to resist movement

- Overall thickness is 1/8 inch.



**#035 SKATE-SPIKE MATTING™**

<b>Roll Sizes &amp; Custom Sizes</b>	<b>3' x 75'</b>	<b>3' Widths</b>
<b>Weight (lbs.)</b>	350	1.5/sq.ft.

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459



**#045 WEIGHT ROOM MATTING**

<b>Stock Sizes</b>	<b>4' x 6'</b>	<b>4' x 6'</b>
<b>Thickness</b>	1/2"	3/4"
<b>Weight (lbs.)</b>	80	130

Shipping Location: Superior Manufacturing Group - Chicago, IL 60638



**#769 CLEAR TRAX™**

<b>Roll Sizes</b>	<b>27" x 60'</b>	<b>36" x 60'</b>	<b>48" x 60'</b>
<b>Weight (lbs.)</b>	55	86	110
<b>Custom Sizes</b>	<b>27" Widths</b>	<b>36" Widths</b>	<b>48" Widths</b>
<b>Weight (lbs.)</b>	.45/sq.ft.	.45/sq.ft.	.45/sq.ft.

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459



# SAFETY TRAX™

- **Sales Tip:** Be certain that primary surface area is completely dry and clean before applying the "peel & stick" backing or the optional Sealing Compound.
- **Where to Specify:** Inclines, ramped walkways.

- Slip resistant pads are affixed to surfaces to increase friction providing a safer pathway.
- Top surface is embedded with silicon carbide particles. As the particles wear, they chip into continuously aggressive finer particles that continue to provide function.
- Pressure adhesive backing allows for easy "peel and stick" installation.
- An optional edge sealing compound is recommended for applications exposed to water, grease or oil.



Black



## #680 SAFETY TRAX™

Roll Sizes	1" x 60'	2" x 60'	3" x 60'	4" x 60'	6" x 60'	12" x 60'	24" x 60'
Weight (lbs.)	0.75	1.5	2	3	4	8	16

**FULL CASE (50) ONLY**

Custom Sizes & Full Cases	6" Width	12" Width	24" Width	5.5" x 5.5"	3/4" x 24"	6" x 24"
Weight (lbs.)	.15/sq.ft.	.15/sq.ft.	.15/sq.ft.	1.25	1.00	5.50

<b>Edge Sealing Compound</b>	5 oz. tube					
<b>Safety Walk Primer*</b>	Quart		*A Hazardous Material charge may be assessed by the freight carrier			

Shipping Location: Superior Manufacturing Group - Chicago, IL 60638



## Knee RX Knee RX HD


#950  
#951

SPECIALTY



- **Sales Tip:** Provides a comfortable work surface for those who are required to occasionally kneel while working. Eliminates the hassle and discomfort of wearing knee pads.
- **Where to Specify:** : Tool carts, Maintenance carts, Individual workstations

- Designed for comfort and durability in extreme kneeling applications
- For use on gravel, asphalt, concrete, dirty/oily surfaces, tile & wood flooring, metal grating, grass
- Nitrile/PVC foam blend for the highest degree of resistance to oils and greases
- Full 1" thick for the ultimate in comfort
- Durable laminated heavy-duty rubber bottom surface for additional comfort and long-lasting wear in rough environments (#951 Knee RX HD only)
- Self extinguishing, non-conductive, silicone free material
- Size: 12" x 22"
- Built-in handle easy to carry or hang up

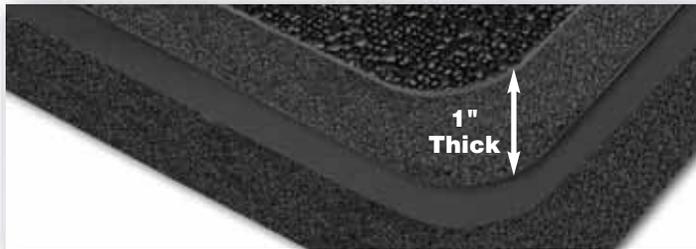

Black

### KNEE RX™

Quantity	1	4-pack
Weight (lbs.) #950	2	8
Weight (lbs.) #951 HD	3	12

Shipping Location: Superior Manufacturing Group - Chicago, IL 60638



# CUSHION STAT™ with DYNA-SHIELD®

DISSIPATIVE/ANTI-STATIC • "BETTER"

- **Sales Tip:** Ideal product for basic anti-fatigue and antistatic relief in an office or light-duty application.
- **Where to Specify:** Work station environment that requires anti-fatigue relief while working with delicate circuitry or components

- Dissipative /anti-static matting is formulated to absorb static electricity. This matting drains static from worker keeping sensitive circuitry from damage.
- Specially compounded pebble-embossed PVC sponge manufactured with NOTRAX® exclusive Dyna-Shield® protective top layer.
- All four sides are beveled to minimize trip hazards.
- Overall thickness is 3/8 inch.
- Testing is per EOS/ESD Association Draft Standard, "Standard for Protection of Electrostatic Discharge Susceptible Items = Worksurfaces" EOS/ESD-S4, Draft January 1988.
- RTG measured at Moderate and 12% RH, at 10V and 100V = 109 ohms.



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NOTRAX® INDUSTRIAL MATS



Brown

Black

Gray

## #825 CUSHION STAT™

Stock Sizes	2' x 3'	3' x 5'	3' x 10'	
Weight (lbs.)	4.1	10.2	19.2	
Roll Sizes & Custom Sizes	3' x 60'	4' x 60'	3' Widths	4' Widths
Weight (lbs.)	114.6	168	.64/sq.ft.	.64/sq.ft.

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459

Black / Yellow





- **Sales Tip:** For maximum effectiveness, we highly recommend that the end-user properly attaches the grounding cord which is included at no charge. It easily snaps into a grommet which is installed in the mat at our factory.
- **Where to Specify:** Assembly or testing areas for circuitry: computers, chips, electronics of all kinds.

- Dissipative /anti-static matting is formulated to absorb static electricity. This matting drains static from worker keeping sensitive circuitry safe from damage.
- Durable vinyl diamond-plate top surface is combined with dense closed cell foam base utilizing NOTRAX® exclusive UniFusion™ technology.
- Provides excellent anti-fatigue support with a textured anti-slip surface
- Overall mat thickness is 9/16 inch.
- Sloped beveled foam on all 4 undersides affords easy access onto and off of mat.
- Custom widths available



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NOTRAX® INDUSTRIAL MATS



**Uni FUSION™**



Black



**#826 DIAMOND STAT™**

Stock Sizes	2' x 3'	3' x 5'	3' x 12'
Weight (lbs.)	9	16	38

**Roll & Custom Sizes**

	3' x 75'	3' Widths	Custom Widths
Weight (lbs.)	320	1.36/sq.ft.	1.36/sq.ft.

Prices include Grounding Cord


Shipping Location: Superior Manufacturing Group - Moselle, MS 39459

# SWITCHBOARD MATTING


INSULATIVE/NON-CONDUCTIVE • "BEST"

- **Sales Tip:** We highly recommend that the mat be replaced every 12 months for optimum performance.
- **Where to Specify:** : In front of high voltage boxes, electrical fuse boxes, transformers.

- Insulative PVC matting is formulated to provide insulation to the worker from being grounded thus preventing electrical shock.
- Each square foot of this matting is tested in conformance with ANSI/ASTM D-178 specifications and meets or exceeds the following:
  - Type 2 Compound: Polyvinyl Chloride
  - Class 2 Di-electric Strength: 30,000 volts
  - Proof test of 20,000 volts
  - Recommended maximum usage of 17,000 volts.

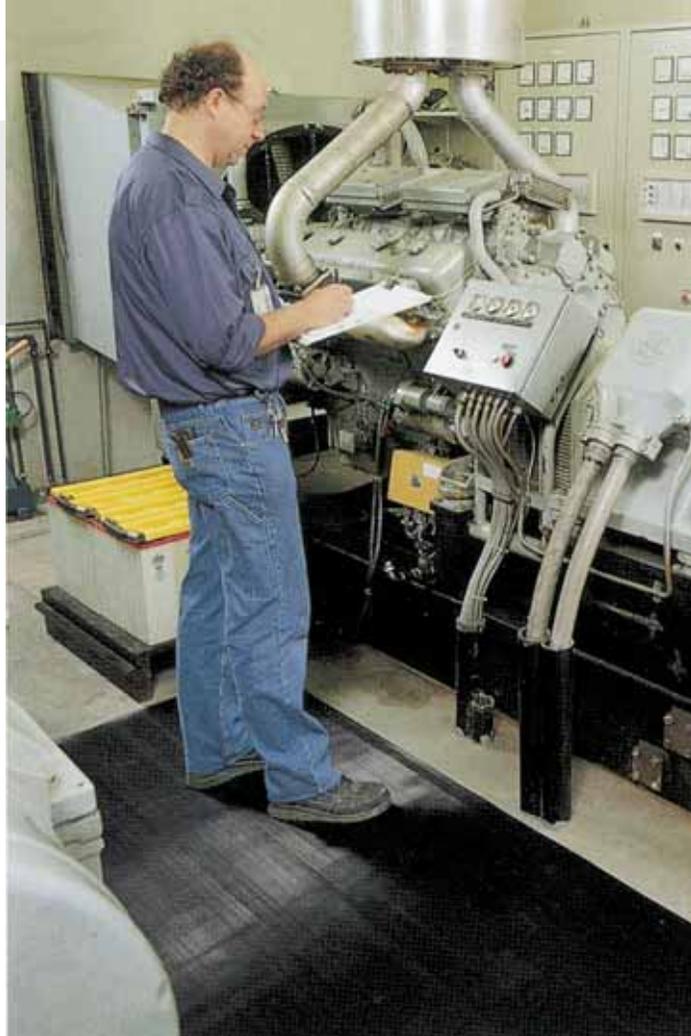

RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® INDUSTRIAL MATS

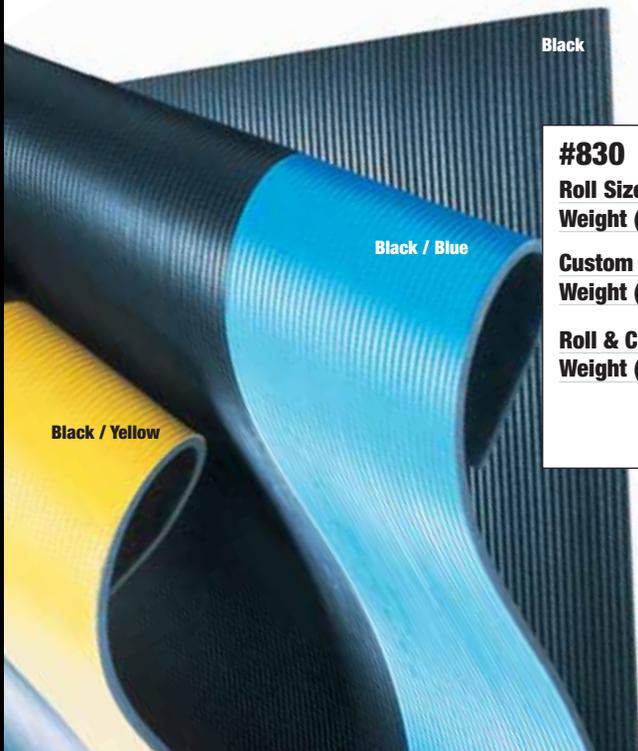

## #830

<b>Roll Sizes - Black</b>	<b>2' x 75'</b>	<b>3' x 75'</b>	<b>4' x 75'</b>
<b>Weight (lbs.)</b>	255	385	500
<b>Custom Sizes - Black</b>	<b>2' Widths</b>	<b>3' Widths</b>	<b>4' Widths</b>
<b>Weight (lbs.)</b>	1.70/sq.ft.	1.70/sq.ft.	1.70/sq.ft.
<b>Roll &amp; Custom Sizes - Colored Borders</b>	<b>3' x 75'</b>	<b>3' Widths</b>	
<b>Weight (lbs.)</b>	385	1.70/sq.ft.	


Shipping Location: Superior Manufacturing Group - Moselle, MS 39459



# DIAMOND SWITCHBOARD MATTING

#831

INSULATIVE/NON-CONDUCTIVE • "BEST"

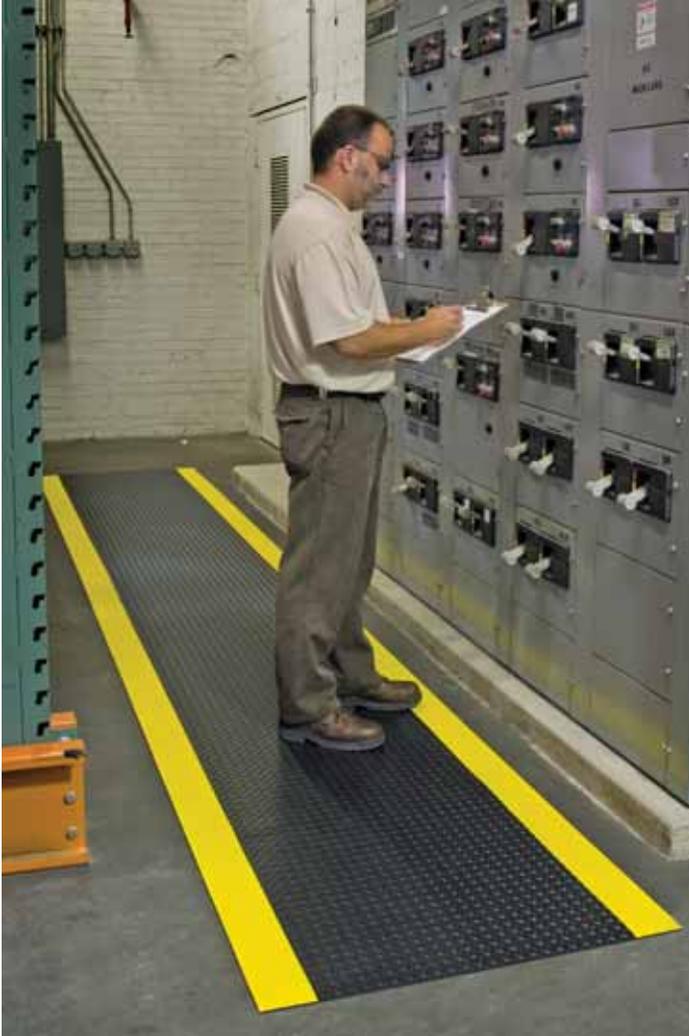

- **Sales Tip:** We highly recommend that the mat be replaced every 12 months for optimum performance.
- **Where to Specify:** : In front of high voltage boxes, electrical fuse boxes, transformers.

- Insulative PVC matting is formulated to provide insulation to the worker from being grounded thus preventing electrical shock.
- Each square foot of this matting is tested in conformance with ANSI/ASTM D-178 specifications and meets or exceeds the following:
  - Type 2 Compound: Polyvinyl Chloride
  - Class 2 Di-electric Strength: 30,000 volts
  - Proof test of 20,000 volts
  - Recommended maximum usage of 17,000 volts.



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® INDUSTRIAL MATS

Black

Black / Yellow

## #831

<b>Roll Sizes - Black</b>	<b>2' x 75'</b>	<b>3' x 75'</b>	<b>4' x 75'</b>
<b>Weight (lbs.)</b>	255	385	500
<b>Custom Sizes - Black</b>	<b>2' Widths</b>	<b>3' Widths</b>	<b>4' Widths</b>
<b>Weight (lbs.)</b>	1.70/sq.ft.	1.70/sq.ft.	1.70/sq.ft.
<b>Roll &amp; Custom Sizes - Colored Borders</b>		<b>3' x 75'</b>	<b>3' Widths</b>
<b>Weight (lbs.)</b>		385	1.70/sq.ft.

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459



## PRODUCT TERMS / GLOSSARY

**ANTI-FATIGUE PROPERTIES:** Cushioning qualities found in NOTRAX® matting that alleviates foot pressure, stimulates blood circulation and helps reduce stress on the lower back, leg joints and major muscle groups.

**CHEMICAL RESISTANCE:** The degree to which NOTRAX® industrial matting products can withstand the erosive qualities of chemicals found in applicable environments.

**DECALON®:** An exclusive NOTRAX® fiber constructed of high Denier polypropylene yarn. Products manufactured with Decalon® offer superb wear resistance, exceptional moisture retention, and crisp pattern appearance in coordinating colors. See products #130, #131, #132, #137, #138, #139, #141, #146, #148, and #325.

**DENIER:** Denier is defined as the thickness of the yarn strand. Combined with the face-weight (ounces of yarn per square yard), and the density or volume of yarn strands, it is a critical factor in the performance, quality and durability of an entrance mat. NOTRAX® competitors define their quality in terms of face-weight only.

**DYNA-SHIELD®:** A revolutionary new process perfected by Superior Manufacturing Group that creates a tough protective barrier on the

surface of foam anti-fatigue mats. Dyna-Shield® products are more resistant to wear than traditional sponge matting. See products #406, #413, #415, #417, #419, and #825.

**GSII:** A technology incorporated into NOTRAX® industrial floor matting products that allow them to excel in harsh industrial environments where aggressive chemicals, oils, and greases are commonly found, and where traditional matting often fails. See products #850GSII, #856GSII.

**NEEDLEPUNCH:** A manufacturing process for carpet matting, needlepunch is engineered with a unique blend of 4 Denier thicknesses of polypropylene yarn ranging from very fine to very thick. Needle punch products are typically more durable, offering better crush resistance and wearability due to the density of the yarn used in the process. See products #105, #109, #117 #118, #136, #323, and #370.

**NITRILE RUBBER:** A synthetic rubber specifically designed for harsh environments providing superior oil, grease, animal fat, and chemical resistance, abrasion resistance, gas permeability, and thermal stability. Niru® is the NOTRAX®, trademarked name for Nitrile rubber compound. See products #543, #544, #550, #551, #556, #562, #650, #656, #755, #758, #850GSII, #856GSII, #580, #585, SOLUTIONS™.

**PVC COMPOUNDS:** PVC (Polyvinyl Chloride) is a plastic compound used in a variety of manufacturing processes and end products. PVC is known for its durability, resistance to moisture, versatility, and its ability to withstand harsh environments. See products #420, #422, #520, #522, #620, #622, #920, #922.

**TUFTED:** An alternative process to needlepunch for manufacturing carpet matting, tufted products are sewn into a backing using a finer yarn. Tufted mats generally are less dense and offer better moisture retention. Tufted products also have more flexibility with colors and patterns providing a more aesthetic finished product. See products #130, #131, #132, #137, #138, #139, #141, #145, #146, #148, #150, #161, #166, #167, #168, #170, #180, #190, #231, and #325.

**UNIFUSION™:** A revolutionary new bonding technology that uses heat and pressure to fuse a floor matting top surface to a base material. The resulting finished product is virtually a single piece, thereby eliminating the possibility of de-lamination. See products #470, #474, #479, #480, #826, #970, #974, #979, #980.

## PRODUCT TESTING

All NOTRAX® Floor Matting Products are subject to the following applicable tests, conducted by independent laboratories prior to their introduction to the market:

**All NOTRAX® carpet products passed the Flammability Test (PillTest DOC FF1-70).**

**Accelerated Soiling Test (ASTM D6540):** Designed to simulate the soiling that occurs from foot traffic/floor service in normal use as an entrance mat.

**Accelerated Wear Test (S.I.M. Floor Machine):** Designed to simulate the wear an entrance mat will receive under normal foot

traffic. The results show the relative wear and crush resistance of the mat.

**Water Retention:** Designed to simulate the moisture retention of an entrance mat in actual usage. Tests are reported in gallons per square yard.

**Abrasion Resistance (ASTM D3884-92):** This is an accelerated wear test for NOTRAX® products. Results are measured in weight loss.

**Compression Deflection (ASTM D3574):** This test assesses the anti-fatigue properties of industrial mats.

**Coefficient Of Friction (ASTM C 1028-89):** Designed to assess the slip resistance of our matting.

**Elongation (ASTM D412):** This test measures the weight needed to break, and the % of size increase at the breaking point.

**Tear Strength (ASTM D1004):** This test measures the force required to initiate the tearing of a mat.

**Critical Radiant Flux (ASTM E648-94A):** This test measures the level of radiant heat energy required to sustain flame propagation.

## MATTING ICONS



**Drainage:** Open construction allows for moisture to pass through, providing secure footing in a wet environment.



**Anti-Slip:** Matting designed to provide added traction through aggressive surface patterns and textures.



**Welding:** Made of durable rubber compounds, these mats can be used in areas where welding takes place.



**Non-Conductive:** Formulated to provide insulation for the worker. It prevents the worker from being “grounded”, thereby preventing electrical shock.



**Outdoor Use:** Heavy-duty construction designed to act as a first line of defense against tracked-in dirt by scraping, soil and moisture from shoes.



**Custom:** Mats available in custom sizes and/or lengths.



**Food Service:** Matting suitable for use in kitchens, bars and other food service areas where durability, grease resistance and drainage are a priority.



**Ergonomic/Anti-Fatigue:** Matting that alleviates foot pressure, stimulates blood circulation and helps reduce stress on the lower back, leg joints and major muscle groups.



**Food Processing:** Matting suitable for use in food processing plants/areas where exposure to animal fats, greases, and oils are common.



**Anti-Static:** Formulated to absorb static electricity.

035 Skate-Spike Matting™	70 - 71	411 Sof-Tred™	13
045 Weight Room Matting	70 - 71	413 Blade Runner® w/Dyna-Shield®	11
083 Std. Beveled Nosing	62	415 Pebble Step Sof-Tred™ w/Dyna-Shield®	12
084 HD Beveled Nosing	62	417 Bubble Sof-Tred™ w/Dyna-Shield®	11
085 Velcro®	63	419 Diamond Sof-Tred™ w/Dyna-Shield®	10
090 Mat Hold	63	420/422 Cushion-Dek™ Series	26
096 Application Roller	63	447 Comfort-Eze™	27
105 Chevron	46	470 Marble Sof-Tyle™	7
109 Brush Step®	53	474 Ergo Mat™	9
117 Heritage Rib®	48	479 Cushion Trax®	6
118 Arrow Trax™	39	480 Pebble Trax®	8
130 Sabre™ Decalon®	52	520/522 Cushion-Lok™ Series	20
131 Dante™ Decalon®	47	523 Modular Lok-Tyle™	68
132 Estes®	40	531 Safety Grid™	69
136 Polynib®	49	543 Cushion-Tred™	19, 64 (Food Service)
137 Opera™	34	544 Comfort Zone™	66
138 Uptown™	42	545 Diamond Top Interlock™	29
139 Boulevard™	43	549 Safety Stance®	16
141 Ovation™	36 - 37	550 Cushion-Ease®	22, 65 (Food Service)
145 Preference®	41	551 M.D. Ramp System™	24
146 Encore™	36 - 37	556 Cushion-Ease® Solid	23
148 Intermission™	35	562 Sanitop®	28
150 Aqua Trap®	44	580 Sorb Stance™	18
161 Barrier Rib™	45	585 Eco Stance™	25
166 Guzzler™	50 - 51	620 Diamond Flex-Lok™	17
167 Portrait™	50 - 51	650 Niru® Cushion-Ease®	15
168 Opus™	50 - 51	656 Niru® Cushion-Ease® Solid	15
170 OrientTrax™	38	680 Safety Trax™	72
180 Tufted Logo Matting	60	730 V-Groove (Vinyl)	32
190 BrilliantStep™	61	735 Round Rib Runner	33
231 Prelude™	36 - 37	737 Diamond Plate Runner	33
265 Wayfarer®	54	750 V-Groove (Rubber)	32
266 Wayfarer® Custom	55	755 Niru® Versa Runner®	67
323 Smart Step™/Arrow Trax™	58	758 Niru® Knob-Top Runner®	67
325 Smart Step™/Decalon®	58	769 Clear Trax™	70
340/350 Soil Guard™ Series	56	825 Cushion-Stat™ w/Dyna-Shield®	74
345 Rubber Brush™	57	826 Diamond Stat™	75
370 Master Trax™	59	830 Switchboard Matting	76
406 Razorback® w/Dyna-Shield®	11	831 Diamond Switchboard Matting	77
410 Airug®	13	850 Niru® Cushion-Ease® GSII™	14
		856 Niru® Cushion-Ease® Solid GSII™	14
		920/922 Cushion-Lok™ Solid-Top Series	21
		950/951 Knee RX Series	73
		970 Marble Sof-Tyle™ Grande™	3
		974 Ergo Mat™ Grande™	5
		979 Saddle Trax™	2
		980 Pebble Trax® Grande™	4
		Solutions™	30 - 31
		T17 Superfoam®	12



**LEGEND:**  
**1 = Recommended**  
**2 = Suitable for Use**  
**3 = Useable, not recommended**  
**4 = Not Recommended**

Use of product in environments specified as "USEABLE, NOT RECOMMENDED" or "NOT RECOMMENDED" may lead to product failure and will void warranty. These ratings are intended to be used as a guide only. For decisive results, please call for a free product sample for on-site testing in actual conditions. Actual results may vary depending on concentration of chemicals.  
 Note: Ratings for products # 470, #474, #479, #480, #970, #974, #979, & #980 refer to top surface only. Copyright in Chicago, Illinois - July, 2004

Chemical	Form	Chemical Family	Concentration	045	543BL	661/662	660	544BL	580/585	545BL	543RD	T17	035	620	422	523	825	826	830	831	920HD	922HD	663/863
2-Propanol (isopropal alcohol)	Liquid	Alcohol		1	1	1	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	1
Acetaldehyde	Liquid	Aldehyde	50%	2	2	2	4	4	3	3	3	3	3	3	3	3	3	3	3	3	3	3	2
Acetic Acid	Liquid	Acid (weak, organic)	50%	2	2	2	3	3	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
Acetic Acid	Liquid	Glacial		3	3	3	3	3	3	4	4	4	4	4	4	4	4	4	4	4	4	4	2
Acetic Anhydride	Liquid	Acid (weak)		3	3	3	2	2	4	4	4	4	4	4	4	4	4	4	4	4	4	4	2
Acetone	Liquid	Ketone		3	3	3	4	4	3	3	3	3	3	3	3	3	3	3	3	3	3	3	1
Ammonium Hydroxide	Liquid	Base (weak)	28-30%	4	4	4	4	4	4	1	1	1	1	1	1	1	1	1	1	1	1	1	2
Amyl Acetate	Liquid	Carboxylic Acid (Aliphatic)		4	4	4	4	4	4	3	3	3	3	3	3	3	3	3	3	3	3	3	2
Aniline	Liquid	Base (aromatic, weak)		4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	2
ASTM #1	Liquid	Paraffin Oil		4	4	4	1	1	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	4
Beef Fat	Solid/Liquid			4	4	4	1	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	4
Benzene	Liquid	Aromatic HC		4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
Benzoic Acid	Liquid	Carboxylic Acid (Aromatic)		4	4	4	4	4	4	1	1	1	1	1	1	1	1	1	1	1	1	1	4
Benzyl Alcohol	Liquid	Alcohol		4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
Boric Acid	Liquid	Acid (weak)		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Brake Fluid	Liquid	Ether/Glycol		4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	1
Bromine	Liquid/Gas	Halogen		4	4	4	4	4	4	2	2	2	2	2	2	2	2	2	2	2	2	2	4
Butane	Liquid	Aliphatic HC		4	4	4	1	1	3	3	3	3	3	3	3	3	3	3	3	3	3	3	4
Butter	Solid/Liquid			4	4	4	1	2	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2
Butyl Acetate	Liquid	Carboxylic Acid (Aliphatic)		4	4	4	4	4	4	3	3	3	3	3	3	3	3	3	3	3	3	3	3
Butyl Alcohol (butanol)	Liquid	Alcohol		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2
Calcium Chloride	Solid	Inorganic Salt		1	1	1	1	1	1	2	2	2	2	2	2	2	2	2	2	2	2	2	1
Calcium Hydroxide	Solid	Metal Hydroxide		1	1	1	1	1	1	2	2	2	2	2	2	2	2	2	2	2	2	2	1
Carbolic Acid (liquid phenol)	Liquid	Acid (organic)		4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
Carbon Monoxide	Gas	Inorganic Carbon Compound		3	3	3	2	2	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Carbon Tetrachloride	Liquid	Halogenated Organic Liquid		4	4	4	3	3	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
Chicken Fat	Solid/Liquid			4	4	4	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	4
Chloroacetone	Liquid	Ketone		4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	2
Chloroform	Liquid	Aliphatic HC		4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
Chromic Acid	Liquid	Acid (weak)	50%	4	4	4	4	4	4	3	3	3	3	3	3	3	3	3	3	3	3	3	3
Citric Acid	Liquid	Acid (weak, organic)	10%	1	1	1	1	1	1	2	2	2	2	2	2	2	2	2	2	2	2	2	1
Corn Oil	Liquid	Fatty Acid		4	4	4	1	2	1	1	1	1	1	1	1	1	1	1	1	1	1	1	4
Cottonseed Oil	Liquid	Aliphatic HC		4	4	4	2	3	1	1	1	1	1	1	1	1	1	1	1	1	1	1	4
Cyclohexane	Liquid	Aliphatic HC		4	4	4	1	1	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
Cyclohexanol	Liquid	Alcohol (cyclic)		4	4	4	3	3	1	1	1	1	1	1	1	1	1	1	1	1	1	1	4
Cyclohexanone	Liquid	Ketone		4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	2
Dibutyl Phthalate	Liquid	Ester		4	4	4	4	4	4	3	3	3	3	3	3	3	3	3	3	3	3	3	1
Diesel fuel	Liquid	Petroleum HC		4	4	4	1	1	3	3	3	3	3	3	3	3	3	3	3	3	3	3	4
Diesel Oil	Liquid	Petroleum HC		4	4	4	1	1	3	3	3	3	3	3	3	3	3	3	3	3	3	3	4
Diethyl Phthalate (DOP)	Liquid	Ester		4	4	4	3	3	4	4	4	4	4	4	4	4	4	4	4	4	4	4	3
Ethane	Liquid	Aliphatic HC		4	4	4	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	4
Ethyl Acetate	Liquid	Ester		2	2	2	4	4	3	3	3	3	3	3	3	3	3	3	3	3	3	3	4
Ethyl Alcohol (ethanol)	Liquid	Alcohol		1	1	1	1	1	3	3	3	3	3	3	3	3	3	3	3	3	3	3	1
Ethyl Ether	Liquid	Ether		4	4	4	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	4
Ethylene Glycol (antifreeze)	Liquid	Alcohol		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Formaldehyde	Liquid	Aldehyde	37%	3	3	3	2	2	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2
Formic Acid	Liquid	Acid (weak, organic)		2	2	2	2	2	2	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Fresh Water	Liquid			1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Fuel Oil	Liquid	Aliphatic HC		4	4	4	1	1	2	2	2	2	2	2	2	2	2	2	2	2	2	2	4
Gasoline	Liquid	Aliphatic HC		4	4	4	1	1	3	3	3	3	3	3	3	3	3	3	3	3	3	3	4
Gear Oil (85W-140)	Liquid	Paraffin Oil		4	4	4	1	1	2	2	2	2	2	2	2	2	2	2	2	2	2	2	4
Glucose	Liquid	Sugar		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2
Glycerin	Liquid	Alcohol		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2
Heptane	Liquid	Aliphatic HC		4	4	4	1	1	2	2	2	2	2	2	2	2	2	2	2	2	2	2	4
Hexane	Liquid	Aliphatic HC		4	4	4	1	1	3	3	3	3	3	3	3	3	3	3	3	3	3	3	4
Hydraulic Fluid	Liquid	Aliphatic HC		4	4	4	1	1	2	2	2	2	2	2	2	2	2	2	2	2	2	2	4
Hydrazine	Liquid	Base (weak)		4	4	4	2	2	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Hydrochloric Acid	Liquid	Acid (strong)	30%	2	2	2	4	4	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
Hydrofluoric Acid	Liquid	Acid (weak)	30%	4	4	4	4	4	3	3	3	3	3	3	3	3	3	3	3	3	3	3	2





# **SUPERIOR MANUFACTURING GROUP, INC.**

7171 W. 65th St. • Chicago, IL 60638  
1.800.621.2802 • [www.notrax.com](http://www.notrax.com)



**CORPORATE HEADQUARTERS**  
Chicago, Illinois USA



**MOSELLE DIVISION**  
Moselle, Mississippi USA  
ISO 9001:2002,  
QS 14000



**CALHOUN DIVISION**  
Calhoun, Georgia USA  
ISO 9001:2002



**SMG - EUROPE B.V.**  
Barendrecht, Netherlands



**FOOD SERVICE DIVISION**  
Providence, RI USA