


# UNIVERSAL\_Power clamps

- **Fully adjustable** opening angle
- **UNIVER original** optical sensor

The **evolution**  
of the **adjustable opening**

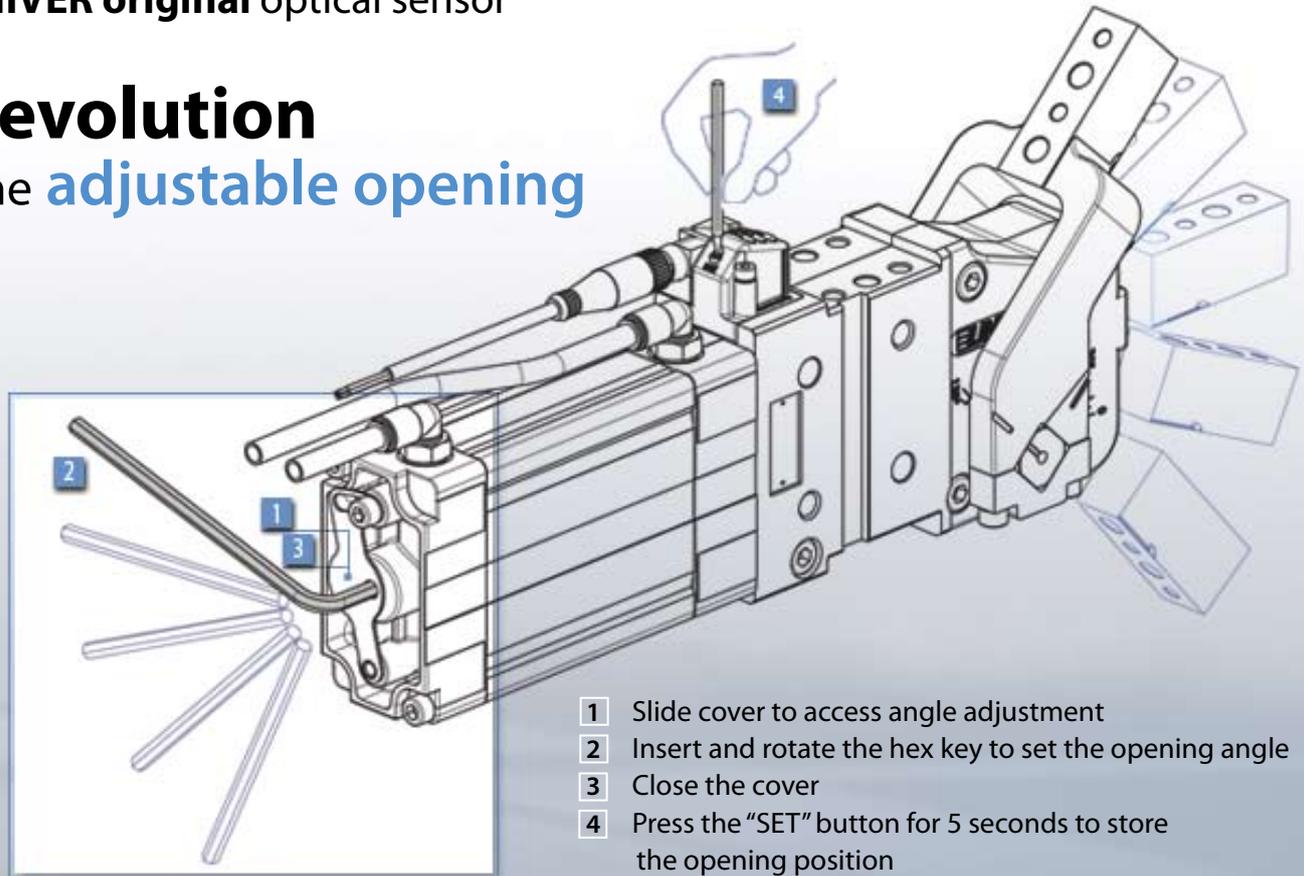

## COMPLETE INTERCHANGEABILITY with LAP/LNP series:

- Interchangeable **mounting**
- Interchangeable **overall dimensions**
- Interchangeable **models and options**
- Same **inner linkage mechanism**


## ADVANTAGES FOR THE END CUSTOMER:

### UNIVERSAL series:

- Allows **opening angle** to be adjusted from 0° to 125° for the 40mm bore and from 0° to 135° for the 50, 63, 80mm bore
- Allows **to set the opening** angle with or without air supply
- Reduces **stock requirements: one UNIVERSAL unit** can be used to set all possible opening angles
- Can be used **as direct replacement** for LAP/LNP series
- Increases **productivity** and decreases cycle time by being able to set the clamp to the minimum required opening angle
- Guarantees the same reliability recognized by the market thanks to the use of the **already proven inner linkage mechanism** of the LAP/LNP series
- Provides **pumatic ports on both sides** of the cylinder
- Is equipped with a **UNIVER original all metal construction optical sensor**, which is IP65 and includes a swivel connector which can be orientated in 0° or 90°

# UNP63

UNIVERSAL power clamps  
conforming to NAAMS Standard

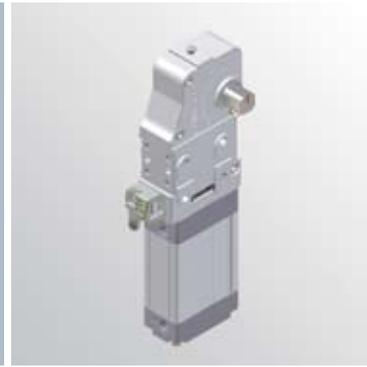

|   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|
| U | N | P | 6 | 3 | N | N | U |
| 1 | 2 | 3 | 4 | 5 | 6 |   |   |



|                 |                  |               |
|-----------------|------------------|---------------|
| <b>1</b> Series | <b>2</b> Version | <b>3</b> Size |
|-----------------|------------------|---------------|

**UN** = UNIVERSAL power clamps conforming to NAAMS Standard fully adjustable opening angle from 0° to 135°

**P** = Pneumatic standard

**63** = ø 63 mm

|                             |  |                        |
|-----------------------------|--|------------------------|
| <b>4</b> Posizione pressore | <b>5</b> Output shaft mounting options | <b>6</b> Sensing style |
|-----------------------------|--|------------------------|

**N** = No arm

**R** = Right side only

**L** = Left side only





**N** = Dual square shaft

**N** = No sensor

(with protection plate)

**U** = Electronic 24 Vdc sensor with M12 swivel connector

## Pneumatic power clamp **UNIVERSAL**

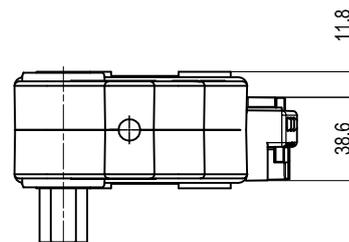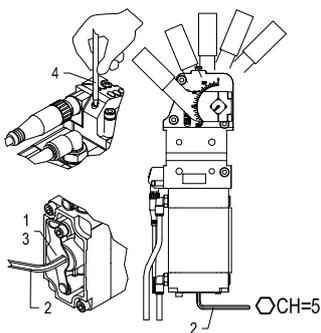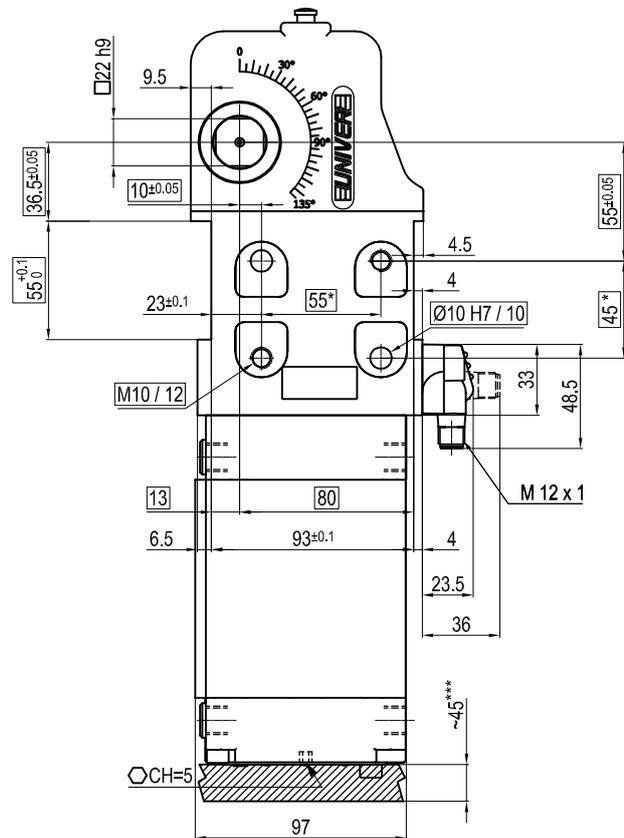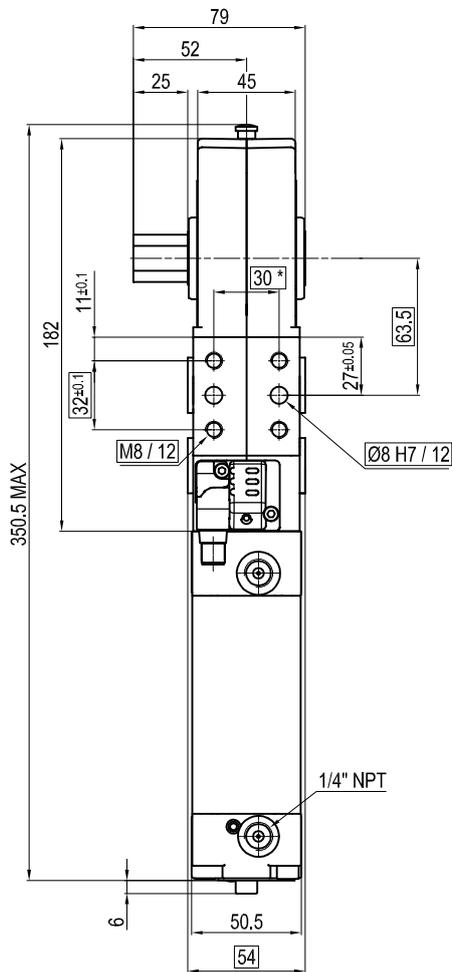

| Bore Ø | Holding moment | Clamping moment | Weight |
|--------|----------------|-----------------|--------|
| 63 mm  | 1750 Nm        | 420 Nm          | 3.6 Kg |

Min./Max. operating pressure: **0,4 / 0,8 MPa**

Operating temperature: **5° + 45° C**

Opening angle: **adjustable from 0° to 135°**

Electronic 24 Vdc sensor with M12 swivel connector that can be orientated at 0° or 90°

Protection Class: **IP 65**





Pneumatic ports on both sides

\* : TOLERANCE BETWEEN DOWEL HOLES ± 0.02, TO SCREW HOLES ± 0.1

\*\* : THE MEASURES REFER TO **NAAMS** STANDARD

\*\*\* : AREA TO ACCESS ANGLE ADJUSTMENT

Subject to technical modifications without notice.

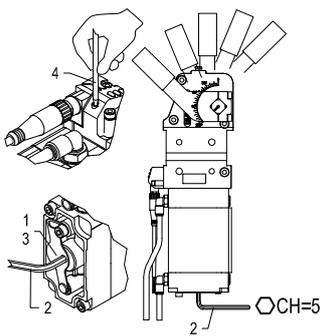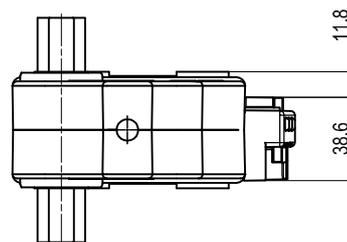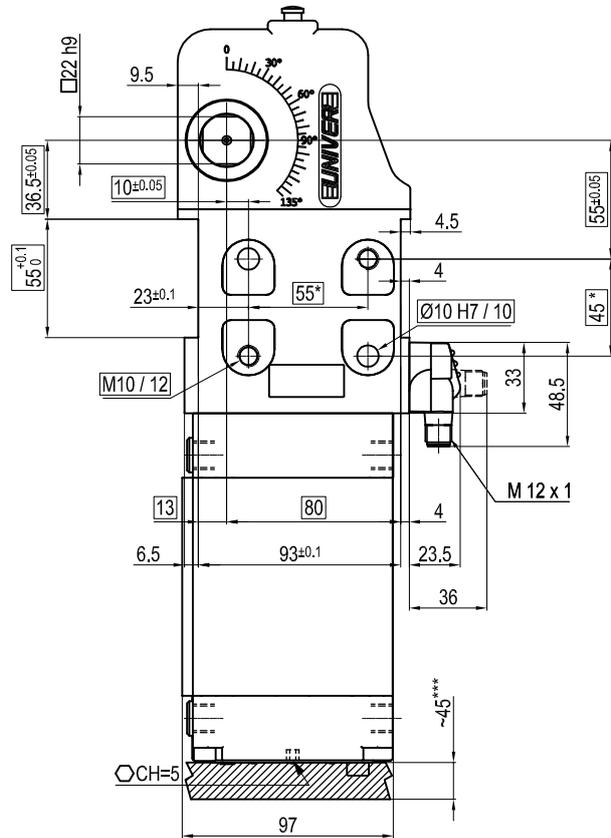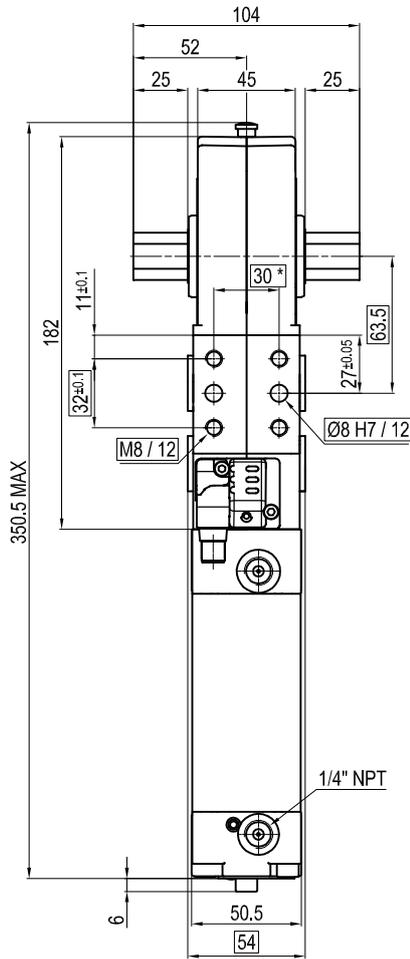

| Bore Ø | Holding moment | Clamping moment | Weight |
|--------|----------------|-----------------|--------|
| 63 mm  | 1750 Nm        | 420 Nm          | 3.6 Kg |

Min./Max. operating pressure: **0,4 / 0,8 MPa**

Operating temperature: **5° + 45° C**

Opening angle: **adjustable from 0° to 135°**

Electronic 24 Vdc sensor with M12 swivel connector that can be orientated at 0° or 90°

Protection Class: **IP 65**





Pneumatic ports on both sides

\* : TOLERANCE BETWEEN DOWEL HOLES ± 0.02, TO SCREW HOLES ± 0.1

\*\* : THE MEASURES REFER TO **NAAMS** STANDARD

\*\*\* : AREA TO ACCESS ANGLE ADJUSTMENT

Subject to technical modifications without notice.

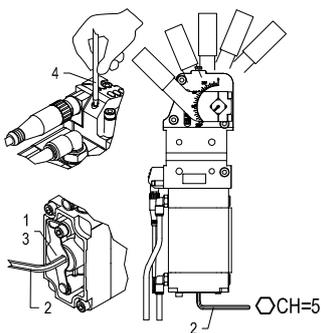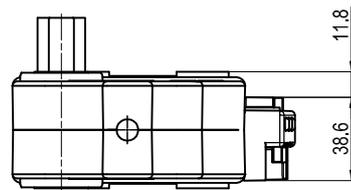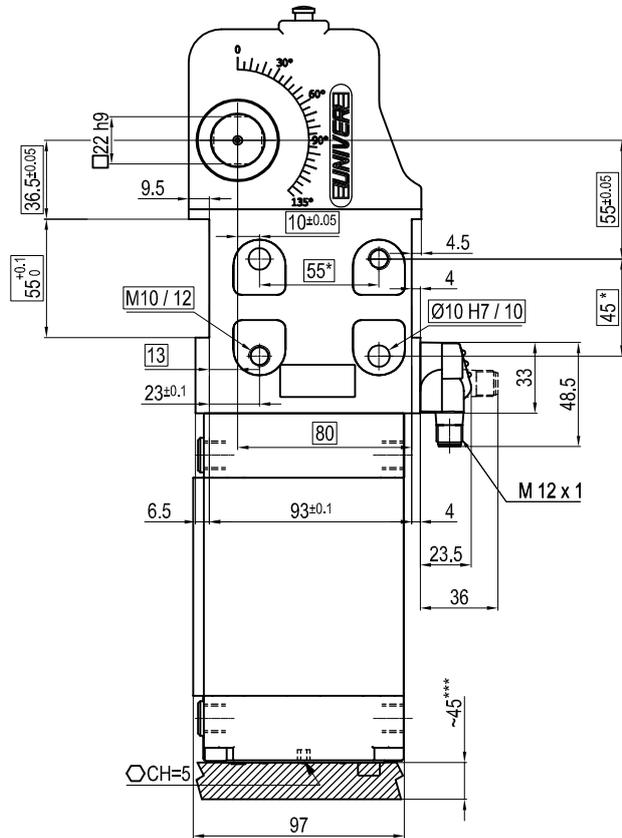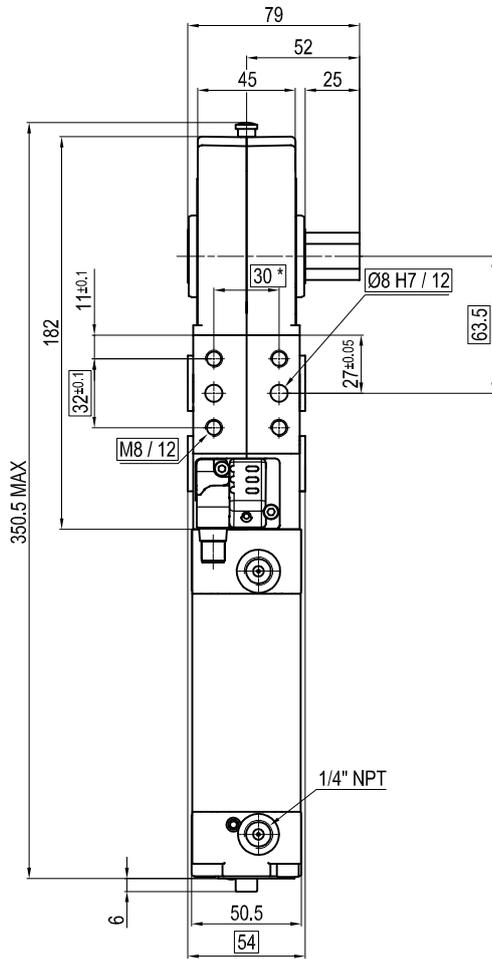

| Bore Ø | Holding moment | Clamping moment | Weight |
|--------|----------------|-----------------|--------|
| 63 mm  | 1750 Nm        | 420 Nm          | 3.6 Kg |

Min./Max. operating pressure: **0,4 / 0,8 MPa**

Operating temperature: **5° + 45° C**

Opening angle: **adjustable from 0° to 135°**

Electronic 24 Vdc sensor with M12 swivel connector that can be orientated at 0° or 90°

Protection Class: **IP 65**

Pneumatic ports on both sides

\* : TOLERANCE BETWEEN DOWEL HOLES ± 0.02, TO SCREW HOLES ± 0.1

\*\* : THE MEASURES REFER TO **NAAMS** STANDARD

\*\*\* : AREA TO ACCESS ANGLE ADJUSTMENT

Subject to technical modifications without notice.