


TECHNICAL SPECIFICATIONS, DESCRIPTIONS and GENERAL FEATURES



- **Fluids:** Valves are suitable for water, low viscosity oils etc... non-aggressive liquids and Air, Inert Gas etc... gaseous but is not suitable for hazardous fluids
- **Switching Function:** Normally Closed (N.C, Closed when de-energised) (ESV 600 Series) and Normally Open (N.O, Open when de-energised) (ESV 601 Series)
- **Principle of Operation:** Pilot Operated
- **Way Number:** 2/2 (Ports / Positions)
- **Connection and Port Sizes:** G3/8" up to G2"
- **Connection Type:** Thread (Female), G (BSPP / ISO 228-1)
- **Pressure Range:** 0,5 -16 Bar (ESV 600 Series) , 0,5 - 8 Bar (ESV 601 Series)
- **Fluid Temperature:** -10°C to max. 80°C
- **Ambient Temperature:** -20°C to max. 70°C
- **Opening Time:** 200ms up to 1500ms
- **Closing Time:** 500ms up to 2000ms
- **Max Viscosity:** 38 cSt or mm²/s
- **Maximum Allowable Pressure or Design Pressure:** 24 bar (ESV 600 Series), 12 Bar (ESV 601 Series)
- Minimum operating differential pressure: 0,5 Bar, internal exhaust system (for ESV 601 Series)
- Valve has sealing o-rings
- Suitable AC and DC voltage, high voltage tolerance
- Coil interchangeable without dismantling the valve (don't matter AC or DC)
- High flow rate, high reliability, high mechanical strength
- Various flow rate options, wide range of orifice options
- Mounting position, optional any position but preferably solenoid coil vertical on top
- The fluid passing through the valve must be filtered
- Flow rate (Q) can be usually calculated as a function of pressure, density and flow coefficient
- According 97/23/EC Pressure Equipment Directive (PED), 2006/95/EEC Low Voltage Directive (LVD) and 2004/108/EC Electromagnetic Compatibility Directive (EMC)

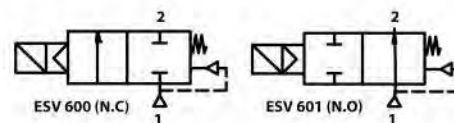

Stainless Steel	Min. Ope. Differential Pressure 0,5 Bar	Coil Rotatable 360°	High Reliability
Full Orifice	Patented Enclosing Tube Design	High Performance	Long Life



08-01
ESV 600-601

Model No	Position	Connection and Port Size	Drifrice Size	Flow Factor / Coefficient Kv	Operating Pressure Differential				Fluid Temperature		Seal	Approximate Weight	Reference Figure	
					Min. (For AC)	Min. (For DC)	Max. (For AC)	Max. (For DC)	Min. °C	Max. °C				
ESV		G	mm	L/m	m ³ /h	Bar	Bar	Bar	Bar	°C	°C	kg		
ESV 600.02	N.C	3/8"	13	65	3.90	0.5	0.5	16	16	-10	80	NBR	1.2	Fig.1
ESV 600.03	N.C	1/2"	13	65	3.90	0.5	0.5	16	16	-10	80	NBR	1.1	Fig.1
ESV 600.04	N.C	3/4"	20	108	6.50	0.5	0.5	16	16	-10	80	NBR	1.15	Fig.1
ESV 600.05	N.C	1"	25	172	10.30	0.5	0.5	16	16	-10	80	NBR	1.3	Fig.1
ESV 600.06	N.C	1 1/4"	32	315	18.90	0.5	0.5	16	16	-10	80	NBR	3.6	Fig.1
ESV 600.07	N.C	1 1/2"	40	430	25.80	0.5	0.5	16	16	-10	80	NBR	3.5	Fig.1
ESV 600.08	N.C	2"	50	690	41.40	0.5	0.5	16	16	-10	80	NBR	3.9	Fig.1
ESV 601.02	N.O	3/8"	13	65	3.90	0.5	0.5	8	8	-10	80	NBR	1.4	Fig.2
ESV 601.03	N.O	1/2"	13	65	3.90	0.5	0.5	8	8	-10	80	NBR	1.3	Fig.2
ESV 601.04	N.O	3/4"	20	108	6.50	0.5	0.5	8	8	-10	80	NBR	1.35	Fig.2
ESV 601.05	N.O	1"	25	172	10.30	0.5	0.5	8	8	-10	80	NBR	1.5	Fig.2
ESV 601.06	N.O	1 1/4"	32	315	18.90	0.5	0.5	8	8	-10	80	NBR	3.8	Fig.2
ESV 601.07	N.O	1 1/2"	40	430	25.80	0.5	0.5	8	8	-10	80	NBR	2.7	Fig.2
ESV 601.08	N.O	2"	50	690	41.40	0.5	0.5	8	8	-10	80	NBR	4.1	Fig.2

OPTIONS

- Custom options can be performed for customer's special requests
- On request; NPT (ANSI 1.20.3), R (BSPT / ISO 7-1), W (BSW / Whitworth), M (Metric) etc...
- On request; diaphragm or sealing or o-rings can be FPM (VITON) (-10°C to 160°C), EPDM (-10°C to 140°C)
- Manual override, filter, other pipe connections, flanged body, body material AISI 316, internal parts stainless steel (for ESV 601)
- On request; other special supply voltages, frequencies (60 Hz), other power, coil insulation class : F (155°C), coil duty latching model
- On request; with electronic timer , Explosion-Proof coil for use in zones 1/21-2/22 (Ex em II T4/T5), coil encapsulation material can be fiber glass reinforced (V0 or V1)
- On request; connector with LED or without connector, connector with visual indication and peak voltage suppression, connector with cable length of 2m, Spade plug (Cable Ø 8-10 mm), connector non-flammable
- On request other versions

POWER CONSUMPTION

Power Consumption							
Alternating Current (AC)				Direct Current (DC)			
Model No	Voltage	Inrush (VA)	Holding (VA)	Model No	Voltage	Cold (W)	Hot (W)
ECO 10.AC.012	12V	30	18	ECO 10.DC.012	12V	16	12
ECO 10.AC.024	24V	30	18	ECO 10.DC.024	24V	16	12
ECO 10.AC.048	48V	30	18	ECO 10.DC.048	48V	16	12
ECO 10.AC.110	110V	30	18	ECO 10.DC.110	110V	16	12
ECO 10.AC.230	230V	30	18	ECO 10.DC.230	230V	16	12

DIMENSIONS (mm)

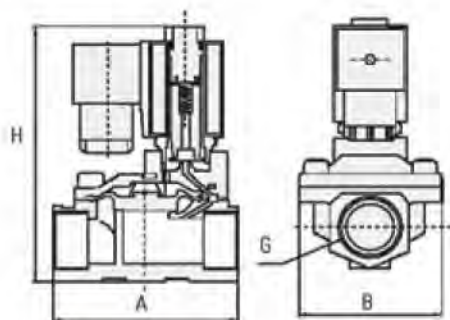


Fig. 1

G	A	B	H
3/8"	66	48	112
1/2"	66	48	112
3/4"	15	58	118
1"	96	70	131
1 1/4"	131	96	146
1 1/2"	131	96	146
2"	165	120	167

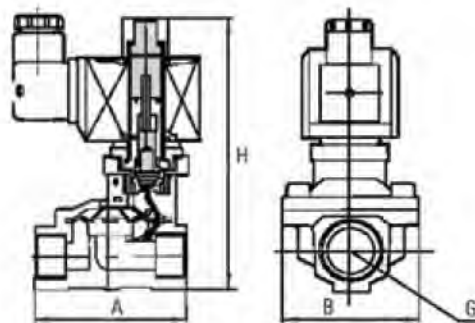


Fig. 2

G	A	B	H
3/8"	66	48	124
1/2"	66	48	124
3/4"	15	58	130
1"	96	70	143
1 1/4"	131	96	158
1 1/2"	131	96	158
2"	165	120	179

ELECTRICAL CHARACTERISTICS

- **Protection Degree:** IP 65 (EN 60529) (with connector)
- **Plug Connection:** DIN 46340-3 poles connectors (DIN 43650)
- **Connector Specification:** ISO 4400 / EN 175301-803 , Form A, Spade plug (Cable Ø 6-8 mm)
- **Electrical Safety:** IEC 335, EN 60335-1, EN 60204-1
- **Coil Insulation Class:** H (180°C)
- **Coil Impregnation:** Polyester Fiber-Resin Glass
- **Coil Encapsulation Material:** Fiber Glass Reinforced (V2)
- **Supply Voltages:** For AC(-) 12V , 24V , 48V , 110V , 230V
For DC (=) 12V , 24V , 48V , 110 V , 230 V
- **Voltage Tolerances:** For AC (-) or DC (=) % -10 ; % +10
- **Frequency:** 50 Hz
- **Coil Duty Cycle:** %100 ED, Continuously Rated
- Design according to DIN VDE 0580

MATERIALS

- **Body:** Stainless Steel (AISI 304)
- **Plunger Seal:** NBR
- **Enclosing Tube:** Stainless Steel (AISI 430FR and AISI 304) for ESV 600 Series , Stainless Steel (AISI 430FR and AISI 304) and Brass for ESV 601 Series
- **Plunger:** Stainless Steel (AISI 430FR)
- **Springs:** Stainless Steel (AISI 302)
- **Shading Ring:** Copper
- **Seat:** Stainless Steel
- **O-rings:** NBR
- **Internal Metal Parts:** Stainless Steel and Brass
- **Cover:** Stainless Steel
- **Diaphragm/Seat Seal:** NBR
- **Cover Screws:** Stainless Steel