




B 250 *universal*

Active-cleaning emulsion polish

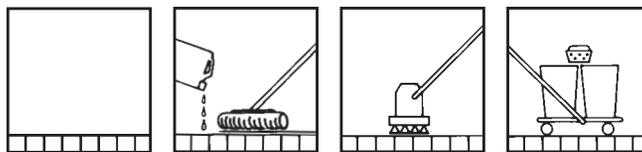

Composition:

B 250 universal contains less than 5% non-ionic tensides. Contains preservative Methylchloroisothiazolinone, Methylisothiazolinone. Other ingredients: polymers, waxes, softeners, and perfume oil. pH-value approx. 7.

Performance:

B 250 universal is an active-cleaning emulsion polish for universal use on all floor coverings that can be coated. Because of its special design B 250 universal is suitable both for the initial treatment of light-traffic floors and for use as a wipe-on polish for maintenance cleaning – which saves the additional handling and the costs of down-time and stock-holding. Its cleaning and polishing functions are perfectly coordinated so that the floor covering is fully protected from mechanical damage, premature wear, and fading. B 250 universal is quick and easy to work with and has a pleasantly fresh smell when being used. The emulsion polish, if used correctly, forms an elastic, non-slip, semi-matt protective film that can be further enhanced by polishing. Occasional polishing (at a maximum setting of 400 rpm) not only improves the appearance but also compresses the polish film and thus contributes to lengthening its useful life. Walkways can be improved easily and without leaving an edge, which postpones the next and expensive thorough cleansing operation.

Area of application

B 250 universal is excellent on all types of floor covering that can take a coating such as PVC, linoleum, elastomer flooring, and flex-plates. Do not use on unsealed wood or polished stone floors. Ideally suitable (e.g.) for schools, office areas, and industrial warehouses.

Application

Initial treatment

Apply B 250 universal on a clean, dry, thoroughly cleansed floor with a suitable thinly and evenly with a suitable applicator cover such as the ultan SPEED. Two or even three coatings are advisable if the floor covering is porous and highly absorbent. Consumption per application between 1.5 and 2.5 litres per 100 square metres. Make absolutely sure of sufficient drying time before the second and the third application.

Maintenance cleaning

Remove stains using a damp-wipe or wet-wipe process and B 250 universal (1 to 2%), TAWIP, WIPGO or VIONET (approx. 1%). For automatic cleaning machines we recommend INNOMAT.

Spray cleaning process

If there is a large quantity of stubborn dirt, this can be removed with spray cleaning (use a light brown pad disc) and a 20% dilution of TAWIP.

Improving walkways without leaving an edge

If the parts of the floor that have been used as walkways or stands have suffered greater wear, it is inevitable that the appearance of the polish will also suffer. These areas can be restored with B250 universal thinned 1:2. The solution is applied in a single wet-wipe process and allowed to dry. If this is followed by a polishing-up stage (at a maximum of 400 rpm) it will further enhance its appearance.

Thorough cleansing

If after a long period of use thorough cleansing becomes necessary, we recommend the use of LINAX plus, LINAX, or GR10. After a thorough wet-wipe with water it will be possible to carry out a new initial treatment once the floor covering has dried completely.

Ecology:

This product is subject to regulations governing the environmental compatibility of washing and cleaning agents and the associated regulations on the biological degradability of the raw materials used.

Comprehensive information on the environmental characteristics of this product is available on request.

Dispose of the empty packaging as recyclable waste.

This product is intended for commercial use.

Vulnerable to frost

Art.-No. 02768	5 l	4 cans per carton
Art.-No. 02656	10 l	

