


UA Series conntion terminal

Type

UA311T(3 Electrode)



16A M3 CE CQC Certificate

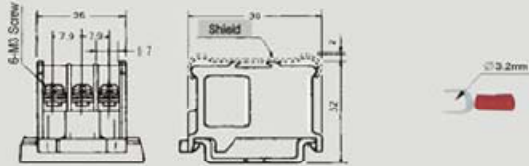


Rated voltage	600V
Rated current	16A
Strength of insulation material	2,500V, 1 Minute
Insulation resistance	Minimal 100M Ω
Applicable wire	Maximal 2mm ²
Orbit	NS 35/7.5

UA312T(3 Electrode)



21A M3.5 CE CQC Certificate

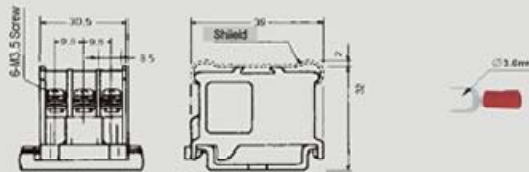


Rated voltage	600V
Rated current	21A
Strength of insulation material	2,500V, 1 Minute
Insulation resistance	Minimal 100M Ω
Applicable wire	Maximal 3.5mm ²
Orbit	NS 35/7.5

UA313T(3 Electrode)



30A M4 CE CQC Certificate

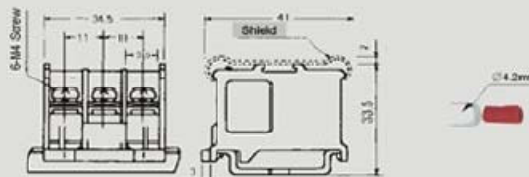


Rated voltage	600V
Rated current	30A
Strength of insulation material	2,500V, 1 Minute
Insulation resistance	Minimal 100M Ω
Applicable wire	Maximal 5.5mm ²
Orbit	NS 35/7.5

UA314T(3 Electrode)



40A M4 CE CQC Certificate

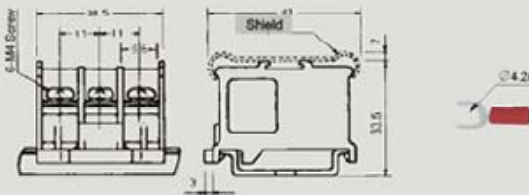

Rated voltage	600V
Rated current	40A
Strength of insulation material	2,500V, 1 Minute
Insulation resistance	Minimal 100M Ω
Applicable wire	Maximal 5.5mm ²
Orbit	NS 35/7.5



EL
News

Ελεκτρολυξ
Electrolux
Macedonia
Palenzo