



LTP50

Pin clamp with vanishing hook

L	T	P	5	0	T	U	2	0	0	0	0	0
1	2	3	4	5	6	7	8	9				

1 Series	2 Version	3 Size
-----------------	------------------	---------------

LT = Pin clamp with vanishing hook

P = Pneumatic

50 = ø 50 mm

4 Model	5 Sensing style	6 Pin diameter
----------------	------------------------	-----------------------

T = With vanishing hook

N = No sensor
(with protection plate)

U = Electronic 24 Vdc sensor with M12
swivel connector

2 = ø 20 mm

3 = ø 25 mm

4 = ø 30 mm

5 = ø 35 mm

6 = ø 40 mm

7 Locating pin	7 Working height	8 Progressive numbering
-----------------------	-------------------------	--------------------------------

0 = Locating pin non included


1 = Locating pin included

0 = Standard

Progressive numbers for special products are assigned by the Sales Dept.



Pneumatic pin clamp with vanishing hook

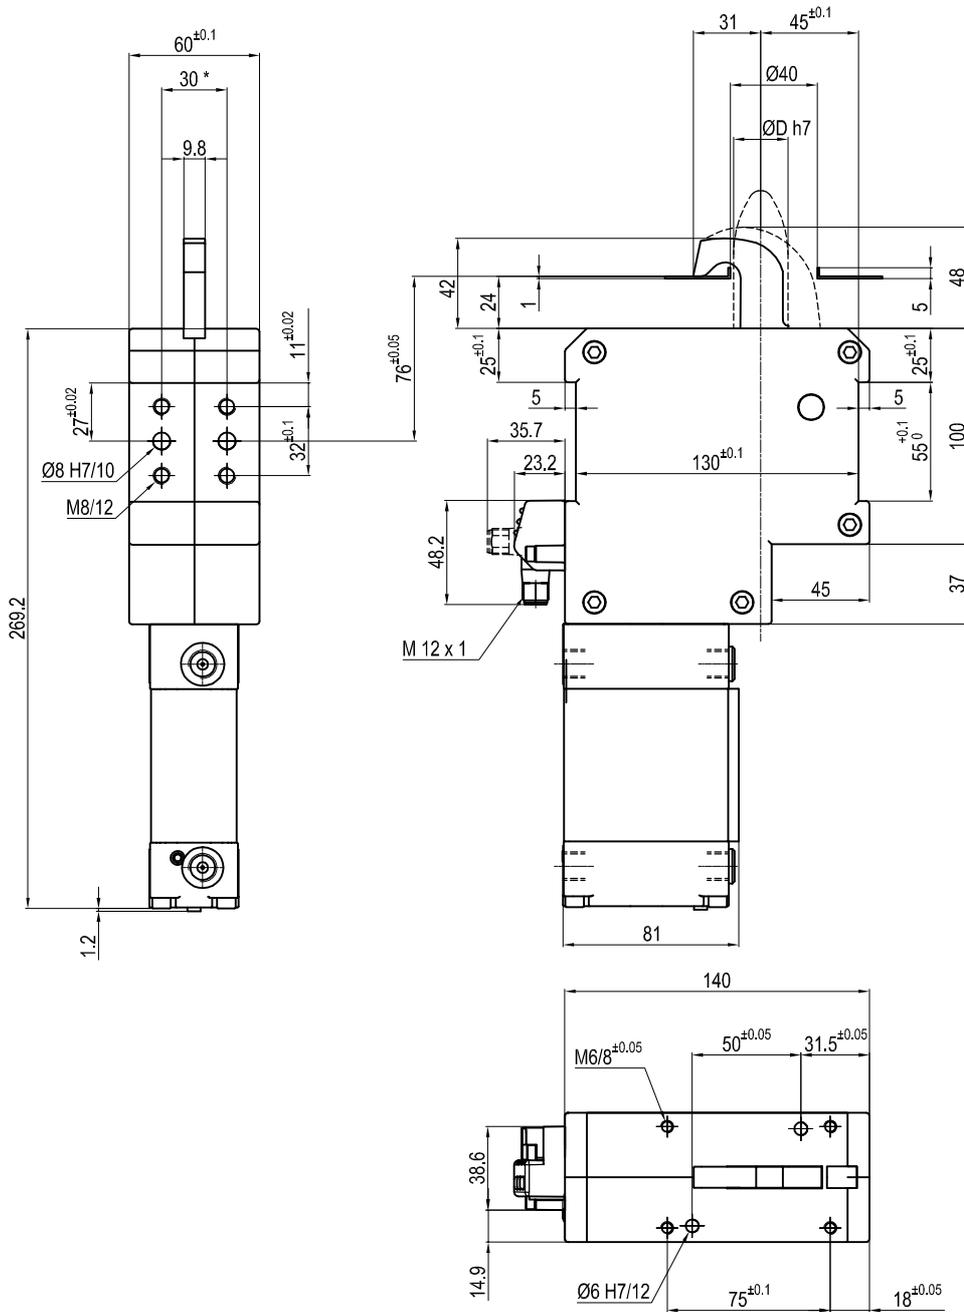

ØD
20
25
30
35
40


Bore Ø	Clamping force	Weight
50 mm	350 Kg	2.8 Kg

Min./Max. operating pressure: **0,4 / 0,8 MPa**
 Operating temperature: **5° + 45° C**
 Electronic 24 Vdc sensor with M12 swivel connector that can be orientated at 0° or 90°
 Protection class: **IP 54**
 Pneumatic ports on both sides

* : TOLERANCE BETWEEN DOWEL HOLES ± 0.02, TO SCREW HOLES ± 0.1

Subject to technical modification without notice.

Pneumatic pin clamp with vanishing hook

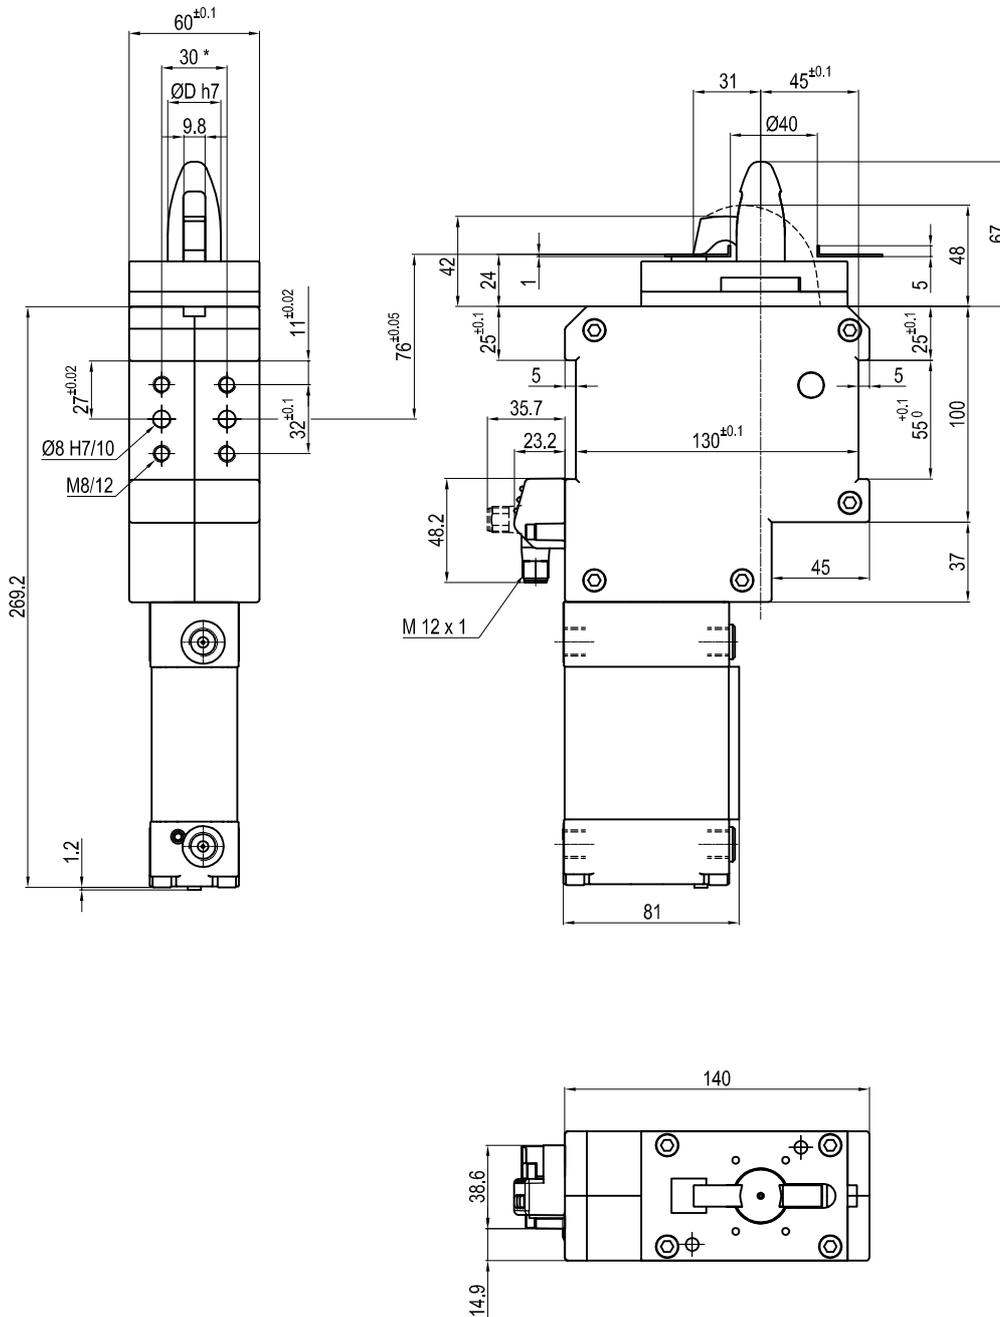

ØD
20
25
30
35
40

Bore Ø	Clamping force	Weight
50 mm	350 Kg	3.2 Kg

Min./Max. operating pressure: **0,4 / 0,8 MPa**
 Operating temperature: **5° ± 45° C**
 Electronic 24 Vdc sensor with M12 swivel connector that can be orientated at 0° or 90°
 Protection class: **IP 54**
 Pneumatic ports on both sides

* : TOLERANCE BETWEEN DOWEL HOLES ± 0.02, TO SCREW HOLES ± 0.1

Subject to technical modification without notice.